


Данни за артикула: IL901820--

## Meter Connection Terminal 50A for Czech Republic, wired 1,8m

Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm<sup>2</sup>, flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019

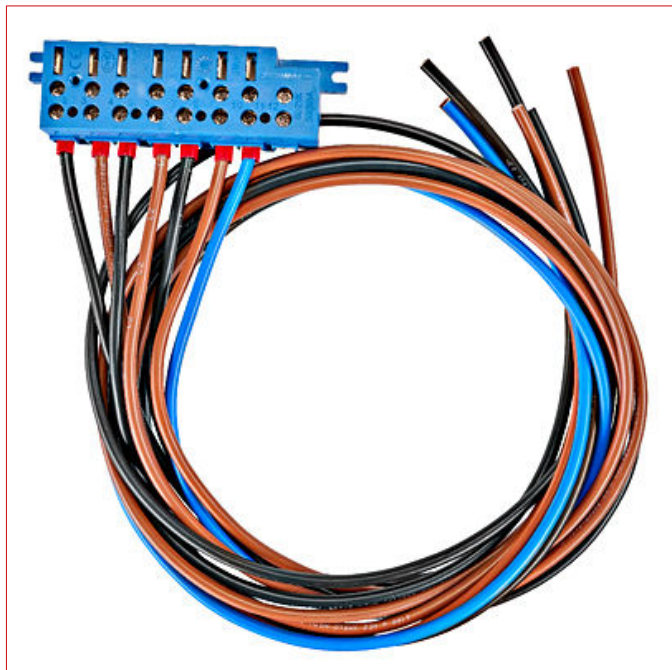

### SCHRACK-Info

- Meter Connection Terminal 3-pol+2N With TRE 50A, for EVU Czech Republic, Vienna, Tyrol and Styria
- It makes it possible to replace devices without interrupting the power supply
- Power loss 3,3W at 50A over all three phases
- 400VAC, 50Hz
- Material Terminal Inserts from Silver-Plated Copper
- OVE Zertifiziert, RoHS konform, OVE R21:2019
- Ambient Temperature max. 60°C
- Conductor Material/Type Copper 2,5-16mm<sup>2</sup>, rigid, solid and stranded /flexible with crimped ferrule, insertion depth of conductor 18-22mm
- Meter pins IL900190
- Tightening torque of Conductor max. 3Nm

### Технически данни

## Технически данни - продължение

|                               |               |
|-------------------------------|---------------|
| Нето ширина (mm)              | 330,00        |
| Нето височина (mm)            | 250,00        |
| Дълбочина (mm)                | 35,00         |
| Нето тегло (kg)               | 1,62          |
| EAN                           | 9004840985054 |
| Разсейвана мощност (W)        | 78,00         |
| Мин. околна температура (°C)  | 0             |
| Макс. околна температура (°C) | 60            |

| Описание                                                                                                                                                                                                                                                                                                                                                             | Артикулен No. |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| Meter Connection Terminal 50A for Czech Republic, wired 1,8m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC,<br>50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper,<br>RoHS konform, OVE R21:2019 | IL901820      |