

Данни за артикула: AK867832--

Комбиниран АП+ДТЗ 3+N, АМРАО 6kA, C 32A, 300mA, тип А

Neutralconductor on the right side, Product category A, Type undelayed, Product standard EN 61009-1:2012 + A1:2014 + A2:2014 + A11:2015 + A12:2016, EN 61009-2-1:1994 + A11:1998, IEC 61009-1, IEC 61009-2-1



Schrack Info

- Double lift terminals on the lower side
- Back terminal protection for safe connection
- Terminal cross-section: 1 - 25mm²
- Switch position indicator


Технически данни

Standard	EN 61009
Тип	A (чувствителност към импулсен постоянен ток)
Тип	без закъснение
Ток на утечка I _{Δn} (mA)	300
Криви на изключване	C
Номинален ток (A)	32
Номинален ток (A)	32
Полюси	3+N



Технически данни - продължение

Номинално напрежение	230/400 V AC
Rated frequency (Hz)	50/ 60
Energy limiting class	3
Breaking capacity Im (A)	3000
Short circuit withstand	6 kA
Номинална изключвателна възможност (kA)	6
Rated impulse withstand voltage Uimp	4kV
Dielectric test voltage at ind. Frequency (V)	2000
Insulation voltage	500 V
Max. permissible back-up fuse against short circuit (A gG)	63
Trigger time undelayed	≤0,1 s
Разсейвана мощност (W)	13,80
Степен на замърсяване	2
Lifetime, electric	2000 Operations
Lifespan, mechanical	10000 Operations
Contact setting display	Yes
Степен на защита - IP	IP20
Terminal cross section (mm²)	1-25
Clamp size for busbar	10 mm²
Conductor material	Copper
Torque	2 Nm
Захранване	two-sided
Terminal type	Double function clamp / pin and fork busbar
Reference temperature (°C)	30
Ambient temperature Open (°C)	-25°C bis +60
Монтаж	On DIN rail according to EN 60715 (35mm) via quick mounting clip
Акcesoари	AM900099--
Серия	AMPARO

Circuit diagram

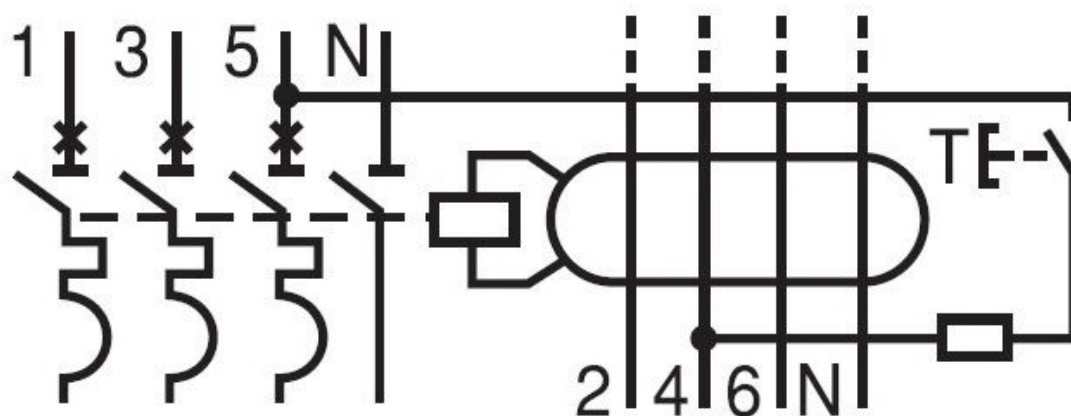


Dimensions

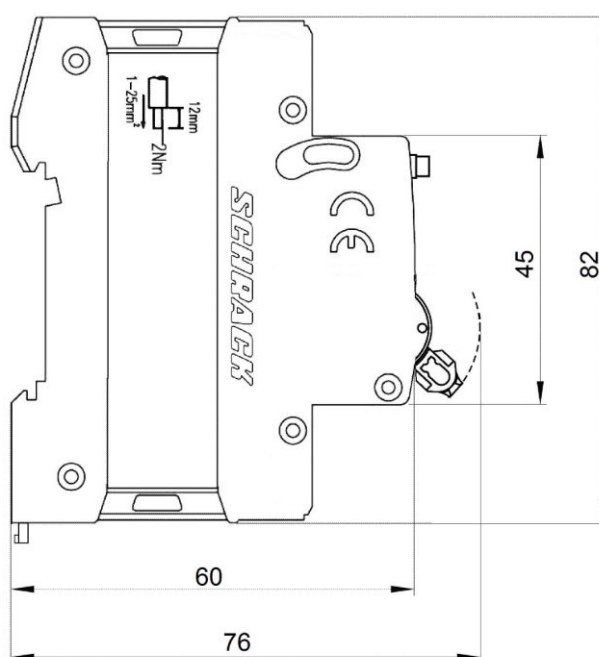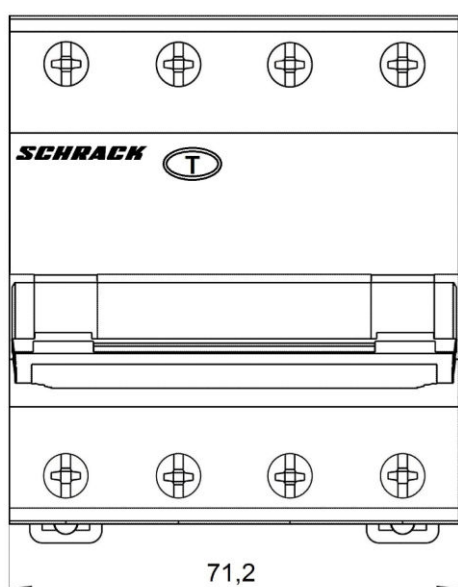


Tripping characteristic according to IEC 60898

Kennlinie C

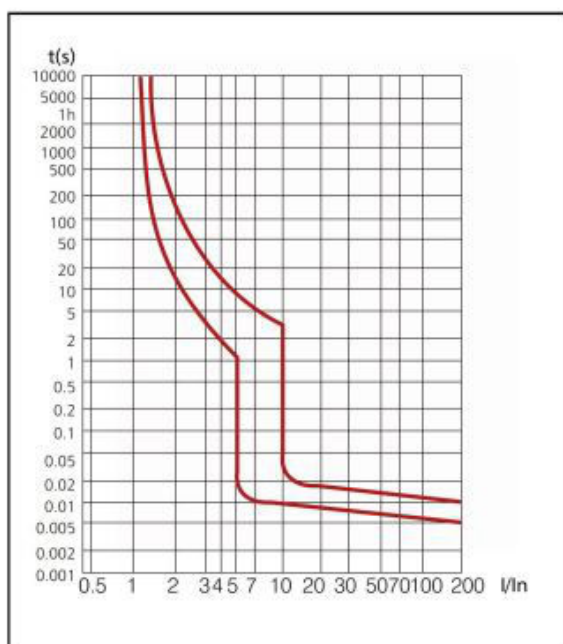


Let-through energy characteristic

Durchlassenergie I^2t

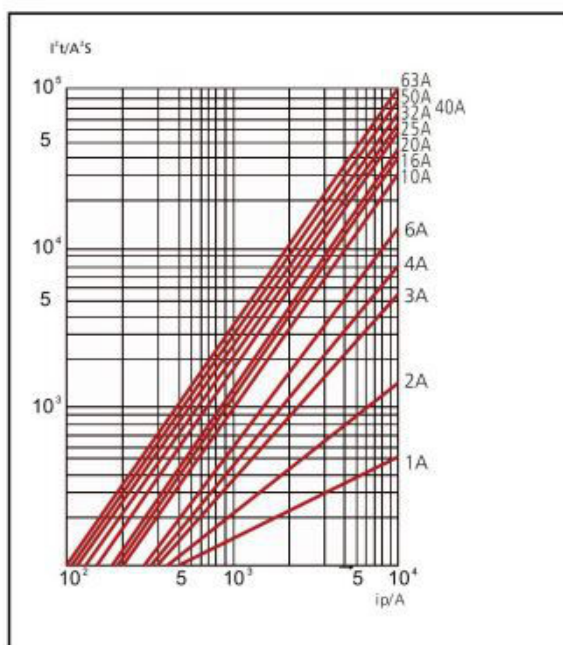

Tripping characteristic

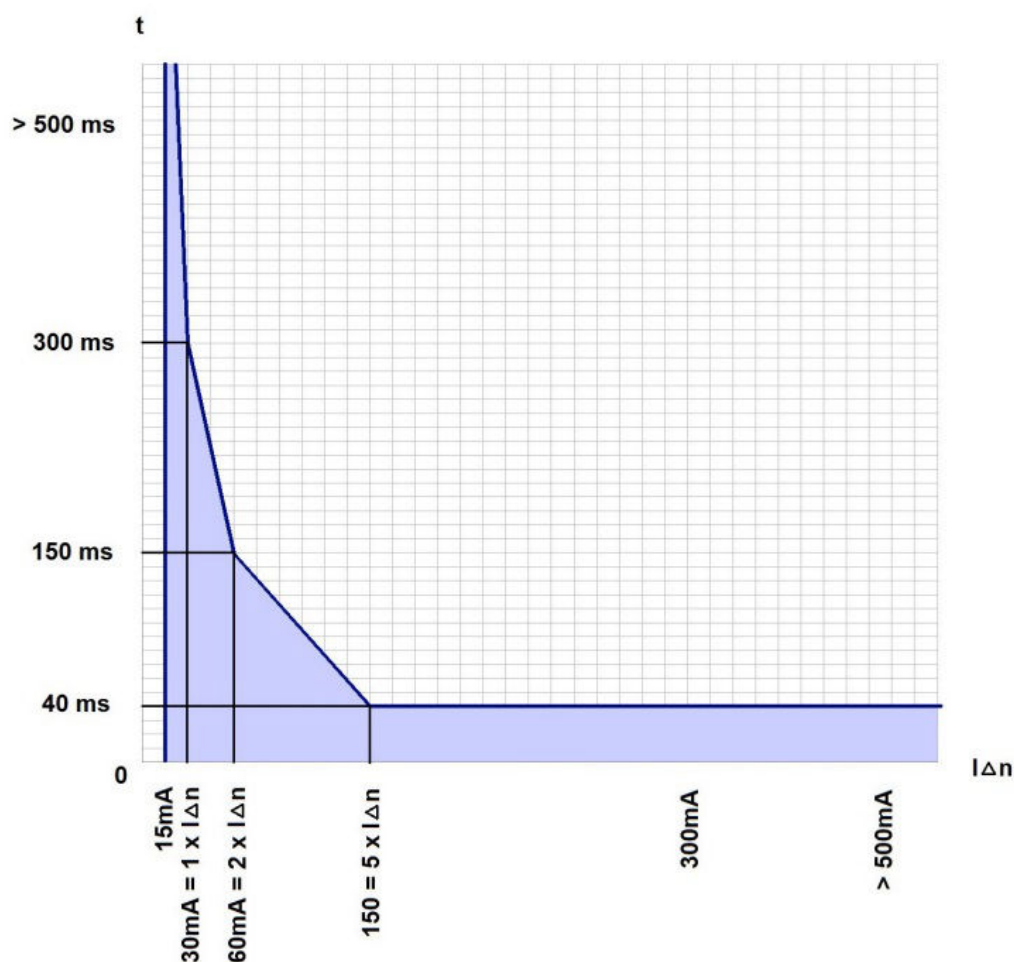

Influence of the ambient temperature on the thermal tripping behavior

I_n (A)	Ambient temperature T (°C)								
	-10°C	0°C	10°C	20°C	30°C	40°C	50°C	60°C	70°C
6	7.2	6.9	6.6	6.3	6	5.7	5.4	5.1	4.8
10	12	11.5	11	10.5	10	9.5	9	8.5	8
16	19.2	18.4	17.6	16.8	16	15.2	14.4	13.6	12.8
20	24	23	22	21	20	19	18	17	16
25	30	28.8	27.5	26.3	25	23.8	22.5	21.3	20
32	38.4	36.8	35.2	33.6	32	30.4	28.8	27.2	25.6
40	48	46	44	42	40	38	36	34	32

Short-circuit selectivity to NH fuses with characteristic curve gG/gL

Short-circuit selectivity **Characteristic B** of fuse insert

	NH-00 gL/gG								
I_n [A]	20	25	36	50	63	80	100	125	160
6	0.5 kA	0.8 kA	1.9 kA	2.5 kA	4.5 kA	5 kA	6 kA	6 kA	6 kA
10		0.7 kA	1.4 kA	2.2 kA	3.2 kA	3.6 kA	6 kA	6 kA	6 kA
16			1.2 kA	1.8 kA	2.6 kA	3 kA	5.6 kA	6 kA	6 kA
20				1.5 kA	2.2 kA	2.5 kA	4.6 kA	6 kA	6 kA
25				1.3 kA	2 kA	2.2 kA	4.1 kA	5.5 kA	6 kA

Short-circuit selectivity **Characteristic C** of fuse insert

	NH-00 gL/gG								
I_n [A]	20	25	36	50	63	80	100	125	160
6	0.5 kA	0.8 kA	1.9 kA	2.5 kA	4.5 kA	5 kA	6 kA	6 kA	6 kA
10		0.7 kA	1.4 kA	2.2 kA	3.2 kA	3.6 kA	6 kA	6 kA	6 kA
16			1.2 kA	1.8 kA	2.6 kA	3 kA	5.6 kA	6 kA	6 kA
20				1.5 kA	2.2 kA	2.5 kA	4.6 kA	6 kA	6 kA
25				1.3 kA	2 kA	2.2 kA	4.1 kA	5.5 kA	6 kA

Short-circuit selectivity to circuit breaker size 1

Short-circuit selectivity **Kennlinie B** of fuse insert

	MC1				
I_n [A]	40	50	63	80	100
6	1.2 kA	2 kA	2.5 kA	3 kA	5 kA
10	1.2 kA	1.5 kA	2 kA	2 kA	4 kA
16	1 kA	1.2 kA	1.5 kA	2 kA	3 kA
20	0.8 kA	1.2 kA	1.5 kA	1.5 kA	3 kA
25	0.7 kA	1.2 kA	1.5 kA	1.5 kA	3 kA

Short-circuit selectivity **Kennlinie C** of fuse insert

	MC1				
I_n [A]	40	50	63	80	100
6	1.2 kA	2 kA	2.5 kA	3 kA	5 kA
10	1.2 kA	1.5 kA	2 kA	2 kA	4 kA
16	1 kA	1.2 kA	1.5 kA	2 kA	3 kA
20	0.8 kA	1.2 kA	1.5 kA	1.5 kA	3 kA
25	0.7 kA	1.2 kA	1.5 kA	1.5 kA	3 kA

Short-circuit selectivity to circuit breaker size 2

Short-circuit selectivity **Kennlinie B** to circuit breaker

	MC2				
I_n [A]	40	50	63	80	100
6	1.2 kA	1.5 kA	2.5 kA	3 kA	6 kA
10	1 kA	1.5 kA	2.5 kA	3 kA	6 kA
13	1 kA	1.2 kA	2 kA	3 kA	6 kA
16	1 kA	1.2 kA	1.5 kA	2.5 kA	6 kA
20	1 kA	1.2 kA	1.5 kA	2 kA	6 kA
25	0.8 kA	1 kA	1.5 kA	2 kA	6 kA

Short-circuit selectivity **Kennlinie C** to circuit breaker

	MC2				
I_n [A]	40	50	63	80	100
6	1.2 kA	1.5 kA	2.5 kA	3 kA	6 kA
10	1 kA	1.5 kA	2.5 kA	3 kA	6 kA
13	1 kA	1.2 kA	2 kA	3 kA	6 kA
16	1 kA	1.2 kA	1.5 kA	2.5 kA	6 kA
20	1 kA	1.2 kA	1.5 kA	1.5 kA	6 kA
25	0.8 kA	1 kA	1.5 kA	2 kA	6 kA

Number of possible wires

Cross-section [mm ²]	Number of rigid single wire conductors					
	1	2	3	4	5	6
1	+	+	+	+	+	+
1.5	+	+	+	+	+	+
2.5	+	+	+	-	-	-
4	+	+	+	-	-	-
6	+	+	+	-	-	-

Cross-section [mm ²]	Number of rigid multi wire conductors					
	1	2	3	4	5	6
10	+	+	-	-	-	-
16	+	-	-	-	-	-
25	+	-	-	-	-	-

Cross-section [mm ²]	Number of flexible single wire conductors (without ferrule)					
	1	2	3	4	5	6
1	+	+	+	+	+	+
1.5	+	+	+	+	+	+
2.5	+	+	+	+	-	-
4	+	+	+	-	-	-
6	+	+	-	-	-	-
10	+	+	-	-	-	-
16	+	-	-	-	-	-
25	+	-	-	-	-	-

Cross-section [mm ²]	Number of flexible single wire conductors (with ferrule)					
	1	2	3	4	5	6
1	+	-	-	-	-	-
1.5	+	-	-	-	-	-
2.5	+	-	-	-	-	-
4	+	-	-	-	-	-
6	+	-	-	-	-	-
10	+	-	-	-	-	-
16	+	-	-	-	-	-
25	-	-	-	-	-	-

Таблица с артикули

Описание	Артикулен No.
Комбиниран АП+ДТЗ 3+N, AMPARO 6kA, C 32A, 300mA, тип A Neutralconductor on the right side, Product category A, Type undelayed, Product standard EN 61009-1:2012 + A1:2014 + A2:2014 + A11:2015 + A12:2016, EN 61009-2-1:1994 + A11:1998, IEC 61009-1, IEC 61009-2-1	AK867832
Акcesoари	
Допълнителен контакт 1 CO, серия AMPARO, за AM / AK Подходящ за AM и AK	AM900099