

Данни за артикула: AT181060--

Стоящ шкаф модулен AT, с монт. плоча, IP55, 1800x1000x600 mm

метален, RAL7035, с монтажна плоча, четириточково заключване на вратата и бравя с въртяща ръкохватка



SCHRACK-Info

- **Material** : Frame: 1.5 mm sheet steel. Doors: Single door and double door: 1.5 mm sheet steel. Rear-, roof- and side-panels: 1.2 mm sheet steel
- **Mounting plate** : 3 mm galvanised sheet steel. Double folded, mounted in the enclosure, fully adjustable in depth in 25 mm increments
- **Bottom plates** : 1.5 mm galvanised sheet steel, consists of
 - three-part bottom plate at depths 400 and 500 mm and
 - four-part bottom plate at depth 600 mm
 - five-part bottom plate at depth 800 mm
- **Frame** : Folded and seam welded reversed open profile with 25 mm hole pattern according to DIN 43660. Including integrated external hole pattern
- **Door** : On single door enclosures, the door is mounted on four double-sided hinges for right-hand opening (= hinged right). Doors for left-hand opening (= hinged left) have to be ordered separately. On double door enclosures, hinges are not reversible. All door panels include the door mounting frame with 25 mm hole pattern. The left Z-wing is locked separately with an inner three-point lock
- **Lock** : Four-point rod lock with push-pull handle with spring adjustment and half cylinder lock 5333 (identical key), does not slide inward. The standard lock can be exchanged for profile half cylinder (DIN cylinder) and other inserts from the range of accessories. Double doors are designed with a left-side inner pivot lever

- **Rear panel** : Mounted with M6 torx screws. Replacement against additional door from the back side is possible. For 1600 mm wide enclosures the rear panel is divided
- **Side panels** : ATSW... supplied in pairs as accessory
- **Roof panel** : Removable
- **Earthing** : All panels are earthed through their fittings and are equipped with a separate earthing stud
- **Degree of protection** : Single door IP55 and double door IP54
- **Impact resistance** : IK10
- **Finish** : Textured powder coating
- **Color** : RAL7035 (Light grey)
- **Delivery includes** : Frame with fitted door, rear panel, roof panel, bottom plates, mounting plate with fixing material for the nearest position of the rear panel and earthing studs. Delivered on a pallet with equal width as the enclosure to enable bayging while still on the pallet. All packing material is recyclable. In 400 mm wide enclosures a mounting plate, bottom plates and door frame are not included
- **Mounting requirement** : Standard delivery ready for combined installation. For stand-alone installation add side panels



Технически данни

Нето широчина (mm)	1.000,00
Нето височина (mm)	1.800,00
Дълбочина (mm)	600,00
Нето тегло (kg)	140,80
Мин. околна температура (°C)	-20
Макс. околна температура (°C)	70
Степен на защита - IP	IP55
Клас на защита	I
Материал	ламарина
Цвят	RAL 7035 (Light grey)
Широчина (mm)	1000
Височина (mm)	1800
Дълбочина (mm)	600
Дебелина на материала на таблото (mm)	1,50
Монтажна плоча	galvanized sheet steel 3mm
Mounting plate width (mm)	888
Mounting plate height (mm)	1688
Mounting plate depth (mm)	3
Дебелина на стената на вратата (mm)	1,50
Брой долни плочи	4
Load capacity per door (kg)	50
Брой врати	1
Bottom plates width (mm)	755
Load Capacity Roof Panel (kg)	20
Load Capacity Side Panel (kg)	60
Тип	Modular enclosure

Технически данни - продължение

Total Load Capacity (kg)	1000
Mounting Plate Load Capacity (kg)	500
Разсейвана мощност (W)	-1021,00

Dimension drawing

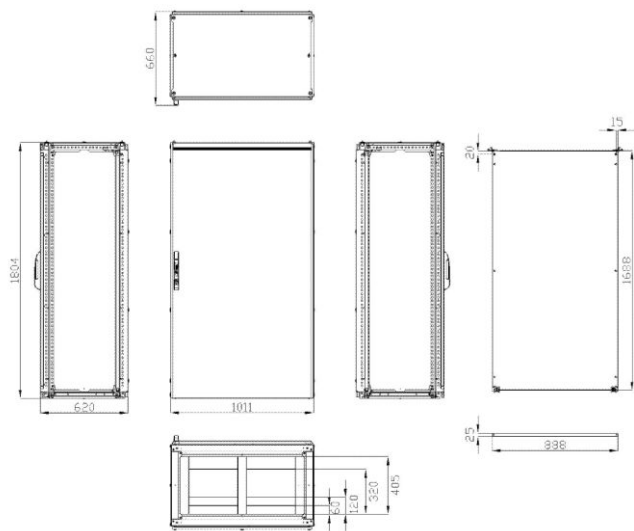


Таблица с артикули

Описание	Артикулен No.
Стоящ шкаф модулен АТ, с монт. плоча, IP55, 1800x1000x600 mm	AT181060
метален, RAL7035, с монтажна плоча, четириточково заключване на вратата и брава с въртяща ръкохватка	
Акcesoари	
LED ligh for EC, infra (not available in this country)	IU006519CZ
Комплект странични панели за шкаф (2 бр.), 1800x600mm, 1.2mm RAL7035	ATSW1806
Ъгли за панели за основа (4 броя), B=100 mm, ABS RAL7012	ATSOC104
Ъгли за панели за основа (4 броя), B=200 mm, ABS RAL7012	ATSOC204
Комплект панели за основа, странични (2бр.), 600/100 mm	ATSOT061
Комплект панели за основа, преден и заден, 1000/100mm RAL7012, компл. = 2 бр.	ATSOB101
Съединителни планки за вътрешен/външен монтаж с 4 свързващи скоби, изолация и монтажни акcesoари	ATCCI060

Таблица с артикули

Описание	Артикулен No.
Акcesoари	
Болтове M12 за повдигане на табла AC и KC (Компл. = 4 броя) Комплект = 4 броя	ACLE9301
Джоб за документи пластмасов A4	ASDRA400
DIN-релса за модулна апаратура, неразпробита, H=7.5mm, 2m Price per piece	BK14004--B
DIN-релса за модулна апаратура перфорирана 2m, цена за брой Цена за 2m	BK14005--A
DIN-релса за модулна апаратура, неразпробита, H=15mm, 2m DIN-rail high, unperforated, sendzimir zincd	IL14035--A
DIN-релса за модулна ап., с отвори 18x6.3mm, H=15mm, 2m Price per piece	IL14037