

Данни за артикула: AT201040--

## Стоящ шкаф модулен АТ, с монт. плоча, IP55, 2000x1000x400 mm

метален, RAL7035, с монтажна плоча, четириточково заключване на вратата и бравя с въртяща ръкохватка



### SCHRACK-Info

- **Material** : Frame: 1.5 mm sheet steel. Doors: Single door and double door: 1.5 mm sheet steel. Rear-, roof- and side-panels: 1.2 mm sheet steel
- **Mounting plate** : 3 mm galvanised sheet steel. Double folded, mounted in the enclosure, fully adjustable in depth in 25 mm increments
- **Bottom plates** : 1.5 mm galvanised sheet steel, consists of
  - three-part bottom plate at depths 400 and 500 mm and
  - four-part bottom plate at depth 600 mm
  - five-part bottom plate at depth 800 mm
- **Frame** : Folded and seam welded reversed open profile with 25 mm hole pattern according to DIN 43660. Including integrated external hole pattern
- **Door** : On single door enclosures, the door is mounted on four double-sided hinges for right-hand opening (= hinged right). Doors for left-hand opening (= hinged left) have to be ordered separately. On double door enclosures, hinges are not reversible. All door panels include the door mounting frame with 25 mm hole pattern. The left Z-wing is locked separately with an inner three-point lock
- **Lock** : Four-point rod lock with push-pull handle with spring adjustment and half cylinder lock 5333 (identical key), does not slide inward. The standard lock can be exchanged for profile half cylinder (DIN cylinder) and other inserts from the range of accessories. Double doors are designed with a left-side inner pivot lever

- **Rear panel** : Mounted with M6 torx screws. Replacement against additional door from the back side is possible. For 1600 mm wide enclosures the rear panel is divided
- **Side panels** : ATSW... supplied in pairs as accessory
- **Roof panel** : Removable
- **Earthing** : All panels are earthed through their fittings and are equipped with a separate earthing stud
- **Degree of protection** : Single door IP55 and double door IP54
- **Impact resistance** : IK10
- **Finish** : Textured powder coating
- **Color** : RAL7035 (Light grey)
- **Delivery includes** : Frame with fitted door, rear panel, roof panel, bottom plates, mounting plate with fixing material for the nearest position of the rear panel and earthing studs. Delivered on a pallet with equal width as the enclosure to enable bayging while still on the pallet. All packing material is recyclable. In 400 mm wide enclosures a mounting plate, bottom plates and door frame are not included
- **Mounting requirement** : Standard delivery ready for combined installation. For stand-alone installation add side panels




## Технически данни

|                                       |                            |
|---------------------------------------|----------------------------|
| Нето широчина (mm)                    | 1.000,00                   |
| Нето височина (mm)                    | 2.000,00                   |
| Дълбочина (mm)                        | 400,00                     |
| Нето тегло (kg)                       | 144,40                     |
| Мин. околна температура (°C)          | -20                        |
| Макс. околна температура (°C)         | 70                         |
| Степен на защита - IP                 | IP55                       |
| Клас на защита                        | I                          |
| Материал                              | ламарина                   |
| Цвят                                  | RAL 7035 (Light grey)      |
| Широчина (mm)                         | 1000                       |
| Височина (mm)                         | 2000                       |
| Дълбочина (mm)                        | 400                        |
| Дебелина на материала на таблото (mm) | 1,50                       |
| Монтажна плоча                        | galvanized sheet steel 3mm |
| Mounting plate width (mm)             | 888                        |
| Mounting plate height (mm)            | 1888                       |
| Mounting plate depth (mm)             | 3                          |
| Дебелина на стената на вратата (mm)   | 1,50                       |
| Брой долни плочи                      | 3                          |
| Load capacity per door (kg)           | 50                         |
| Брой врати                            | 1                          |
| Bottom plates width (mm)              | 755                        |
| Load Capacity Roof Panel (kg)         | 20                         |
| Load Capacity Side Panel (kg)         | 60                         |
| Тип                                   | Modular enclosure          |

## Технически данни - продължение

|                                   |         |
|-----------------------------------|---------|
| Total Load Capacity (kg)          | 1000    |
| Mounting Plate Load Capacity (kg) | 500     |
| Разсейвана мощност (W)            | -924,00 |

## Dimension drawing

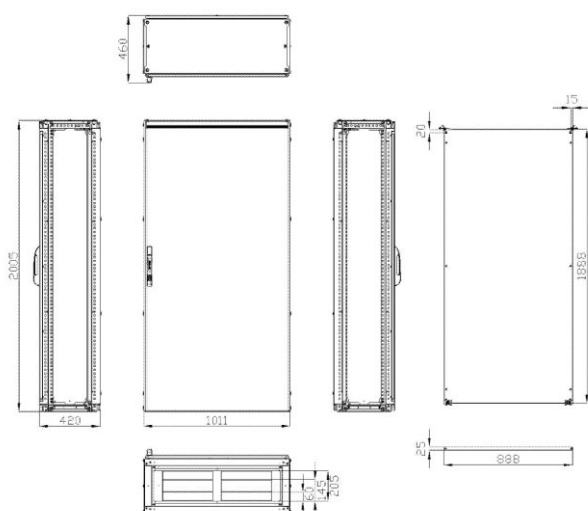

## Таблица с артикули

| Описание                                                                                             | Артикулен No. |
|------------------------------------------------------------------------------------------------------|---------------|
| Стоящ шкаф модулен АТ, с монт. плоча, IP55, 2000x1000x400 mm                                         | AT201040      |
| метален, RAL7035, с монтажна плоча, четириточково заключване на вратата и брава с въртяща ръкохватка |               |
| <b>Акcesoари</b>                                                                                     |               |
| LED lighth for EC, infra (not available in this country)                                             | IU006519CZ    |
| Комплект странични панели за шкаф (2 броя), 2000x400mm, 1.2mm RAL7035                                | ATSW2004      |
| Ъгли за панели за основа (4 броя), B=100 mm, ABS RAL7012                                             | ATSOC104      |
| Ъгли за панели за основа (4 броя), B=200 mm, ABS RAL7012                                             | ATSOC204      |
| Комплект панели за основа, странични (2бр.), 400/100 mm                                              | ATSOT041      |
| Комплект панели за основа, преден и заден, 1000/100mm RAL7012, компл. = 2 бр.                        | ATSOB101      |
| Съединителни планки за вътрешен/външен монтаж с 4 свързващи скоби, изолация и монтажни акcesoари     | ATCCI060      |

## Таблица с артикули

| Описание                                                                                                 | Артикулен No. |
|----------------------------------------------------------------------------------------------------------|---------------|
| <b>Акcesoари</b>                                                                                         |               |
| Болтове M12 за повдигане на табла AC и KC (Компл. = 4 броя)<br>Комплект = 4 броя                         | ACLE9301      |
| Джоб за документи пластмасов A4                                                                          | ASDRA400      |
| DIN-релса за модулна апаратура, неразпробита, H=7.5mm, 2m<br>Price per piece                             | BK14004--B    |
| DIN-релса за модулна апаратура перфорирана 2m, цена за брой<br>Цена за 2m                                | BK14005--A    |
| DIN-релса за модулна апаратура, неразпробита, H=15mm, 2m<br>DIN-rail high, unperforated, sendzimir zincd | IL14035--A    |
| DIN-релса за модулна ап., с отвори 18x6.3mm, H=15mm, 2m<br>Price per piece                               | IL14037       |