


Данни за артикула: INSR2480--

Пакетен прекъсвач Жълто/Червен 4P, 80А

Версия Аварийен главен прекъсвач, Номинален ток 80А, Полюси 4, Степен на защита - IP IP40 (front), IP10 (terminals), Neutral conductor contacts Neutral conductor early-make, late-break design (closes before and opens after the phase conductors to prevent voltage displacement)

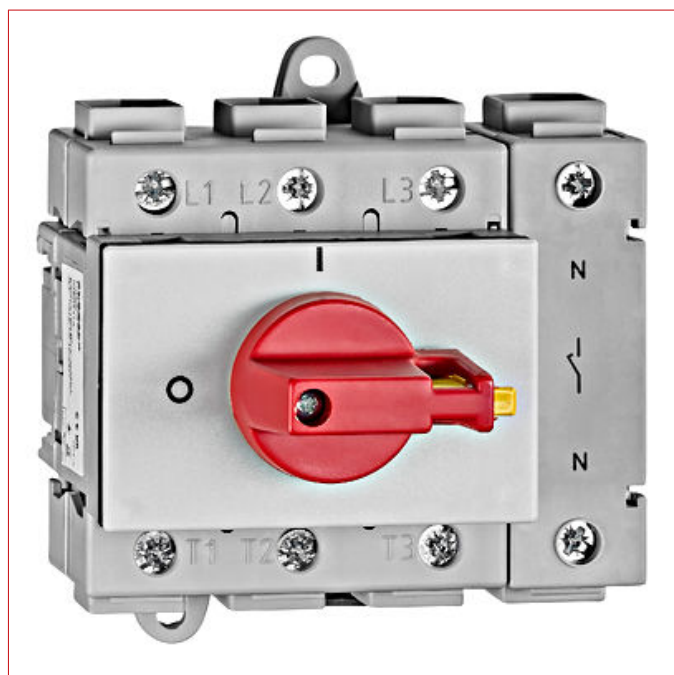


Технически данни

Версия	Аварийен главен прекъсвач
Номинален ток (A)	80
Полюси	4
Монтаж	DIN релса
Standard	IEC 60947, EN 60947, VDE 0660
Rated insulation voltage [Ui] (V)	690
Rated impulse withstand voltage [Uimp] (V)	6000
Rated short-time withstand current Icw	1000
Rated conditional short-circuit-current	10kA @ 440V / 6kA @ 690V
Short-circuit protection maximum fuse	80
Честота (Hz)	50/60


Технически данни - продължение

Operating Current	AC-21A - 690V - 80A AC-23A - 690V - 22A AC-23A - 400V - 43A AC-3 - 400V - 43A AC-3 - 690V - 22A
Switching Capacity	AC-23A - 400V - 30kW AC-23A - 690V - 22kW AC-3 - 690V - 18.5kW AC-3 - 400V - 22kW
According to UL 508 / CSA	
Начин на свързване	UL/CSA - AWG 14-6
Оперативно напрежение AC (V)	600
Thermal rated continuous current (A)	80
Active Power	3x240VAC - 15Hp 3x600VAC - 50Hp 3x480VAC - 40Hp 1x120VAC - 10Hp
Свързване	
Conventional thermal current I _{th} (A)	80
Tightening torque (Nm)	2,50
Connection cross-section, multi-wire (mm ²)	2,5-35
Connection cross section, single wire (mm ²)	2,5-35
Connection cross-section, flexible wire with ferrule (mm ²)	2,5-16
Retrofit contacts	
Допълнителни контакти	Maximum 2x INSHK001 -- permitted. 1x INSHK001 -- can be snapped on to the left side of the main contact and 1x INSHK001 -- to the right side of the main contact. Maximum configuration 2x NC contact / 2x NO contact. The switching behavior is the same regardless of whether the auxiliary contact is snapped on to the left or right side of the main contact.
Neutral conductor contacts	Neutral conductor early-make, late-break design (closes before and opens after the phase conductors to prevent voltage displacement)
Работна температура	-25°C to +55°C
Mechanical durability	100000 switching cycles
Power loss per pole (W)	5,50
Protection against direct contact	finger-proof and back-of-hand-proof according to VDE 0106 Part 100
Степен на защита - IP	IP40 (front), IP10 (terminals)
Lockable	With 2 locks, each with a shackle lock diameter of 4-6 mm
Нето дължина (mm)	75,00
Нето ширина (mm)	87,50
Нето височина (mm)	45,00
Мин. околна температура (°C)	-25
Макс. околна температура (°C)	55

Schaltbild INSR2480--



Maßbild INSR2480--

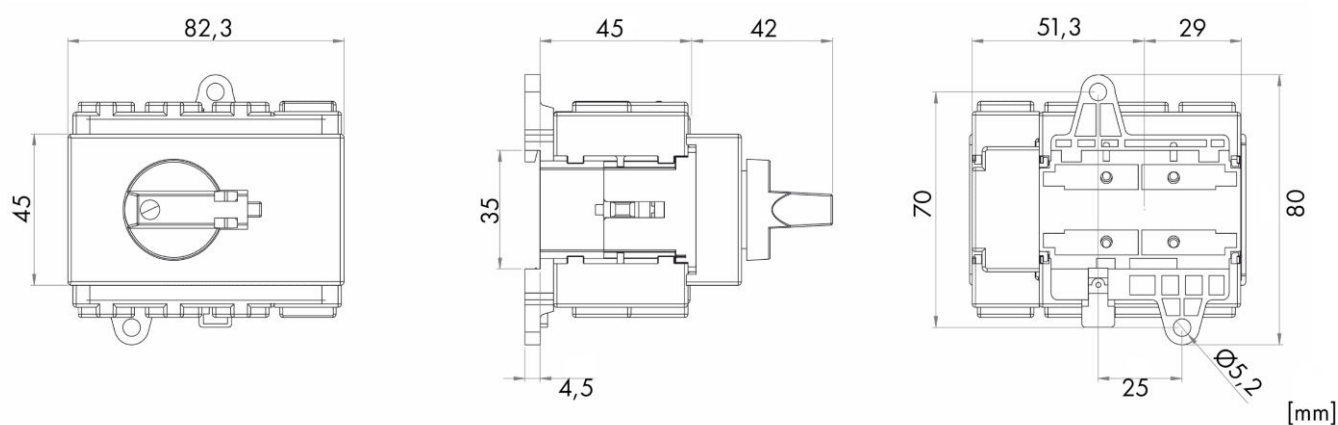

Montageanleitung INSHK Hilfskontakte

Hilfskontakt
Auxiliary contact
INSHK001--



Montageanleitung INSR Hutschienenmontage Schalter



Таблица с артикули

Описание	Артикулен No.
Пакетен прекъсвач Жълто/Червен 4P, 80A Версия Аварийен главен прекъсвач, Номинален ток 80A, Полюси 4, Степен на защита - IP IP40 (front), IP10 (terminals), Neutral conductor contacts Neutral conductor early-make, late-break design (closes before and opens after the phase conductors to prevent voltage displacement)	INSR2480
Акcesoари	
Допълнителен контакт 1NO/1NC, за INSR, INSP и INSA Nicht für INSE zu verwenden, Версия акcesoари, Степен на защита - IP IP20 (terminals)	INSHK001