



Данни за артикула: BK050205--

Пластмасово модулно табло, IP65, прозр. врата, 2 реда, 36М

Wall Mounted Distribution box halogen-free, UV stabilized, 1500VDC, material ABS, including neutral conductor and grounding rails, cable entry at top 12xM20, 6xM25, 2xM32, 1xM40, at bottom 12xM20, 6xM25, 2xM32, 1xM40, at the side 4xM25



SCHRACK-Info


- Wall-mounted enclosures with transparent door inclusive UV-Protection
- Lock: Pressure-operated mechanism, a small cylinder can be installed
- Includes PE and N terminals
- Protection class II
- Halogen-free plastic materials
- UV stability and weather resistant

- Rated voltage 1000VAC, 1500VDC
- Ambient temperature: -25° to +40°C
- Glow wire test: 650°C
- Material: ABS
- Degree of protection IP65
- Resistance to impact: IK08
- RAL7035 light grey



Технически данни

Нето ширина (mm)	418,00
Нето височина (mm)	436,00
Дълбочина (mm)	148,00
Нето тегло (kg)	3,37
EAN	9004840938982
Разсейвана мощност (W)	-64,10
Мин. околна температура (°C)	-25
Макс. околна температура (°C)	40
Редове	2

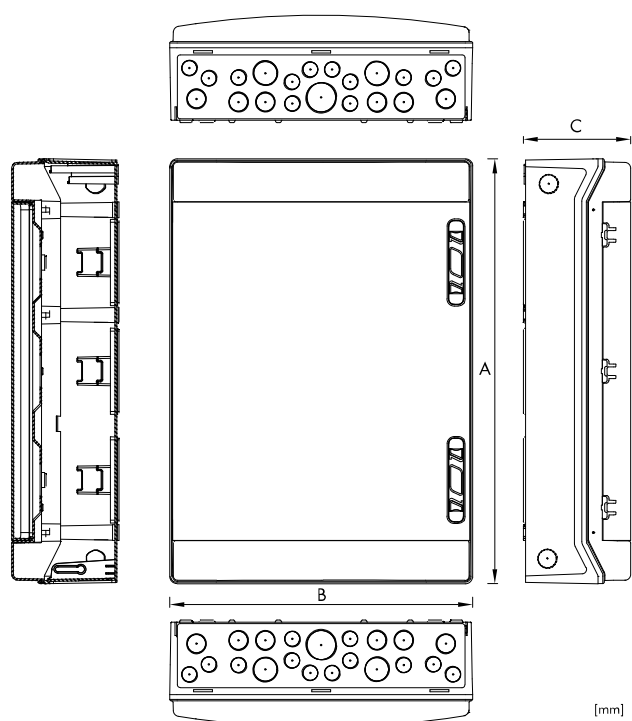Чертеж: Пластмасово модулно табло, IP65, прозр. врата, 2 реда, 36М

AP-Wohnungsverteiler Serie BK050xx, IP65, transparente Tür

Artikelnummer	A [mm]	B [mm]	C [mm]	Reihen	TE	Verlust- leistung [W]*
BK050200	231	166	113	1	4	-10
BK050201	231	238	118	1	8	-23
BK050202	246	310	148	1	12	-33
BK050203	436	310	148	2	24	-52
BK050204	586	310	148	3	36	-67
BK050205	436	418	148	2	36	-64
BK050206	286	418	148	1	18	-46
BK050207	231	202	113	1	6	-20
BK050208	586	418	148	3	54	-82
BK050209	870	310	148	4	48	-95
BK050210	872	418	148	4	72	-110

*max. Abstrahlleistung des Gehäuses, berechnet als Einzelgehäuse bei Wandanbau und einem $\Delta T = 35K$.

Detailinformationen und Rechtshinweise siehe Seite ?

Таблица с артикули

Описание	Артикулен No.
Пластмасово модулно табло, IP65, прозр. врата, 2 реда, 36М	
Wall Mounted Distribution box halogen-free, UV stabilized, 1500VDC, material ABS, including neutral conductor and grounding rails, cable entry at top 12xM20, 6xM25, 2xM32, 1xM40, at bottom 12xM20, 6xM25, 2xM32, 1xM40, at the side 4xM25	BK050205
Акcesoари	
Секретна ключалка за табла BK05, IP65	BK050097
Съединителен щуцер за табла BK05, M25x1.5	BK050098
Cable bushing for connecting enclosures	
Съединителен щуцер за табла BK05, M40x1.5	BK050099
Cable bushing for connecting enclosures	