

Данни за артикула: DSS4260103

Сървърен шкаф подсилен W600xH2090xD1000 42U, 1500kg, 19", IP30

Front door perforated full width, Reardoor perforated double-wing



SCHRACK-Info

- Welded powder-coated sheet steel skeleton 2,0 mm
- Height: 42U
- Width: 600mm
- Other dimensions and Datacenter-version with flat roof for cold-aisle are available upon request.
- Depth: 1000 mm
- Colour: light grey RAL 7035, frame blue RAL 5005
- Maximum static load: 1.800 kg
- Degree of protection: IP20
- IP54 version with Front Glas-door and rearpanel full-metal available upon request.
- Frontdoor full width, Perforated 80% Permeability with handsome swing handle. Prepared for half-cylinder type locks. Halfcylinder lock (Ordernumber: DV900333), Depth= 40mm, Diameter= 17mm, Fixing= M5 Screw, optional available.
- Doors hinged right. Can be changed to hinging on left.
- Frontdoor can be replaced by optional DSRT doors (Glas, Full metal or Perforated, Full width or Double-wing).
- Removeable and lockable side-panels. Key included.
- Reardoor Double-wing, Perforated 80% Permeability with handsome swing handle. Reardoor can be replaced by optional DSRT doors (Glas, Full metal or Perforated, Full width or Double-wing).
- Heavy-Duty base optional: Height = 120 mm
- 19" rails (4 pcs.) galvanised, continuously depthadjustable. Numbering if Height-Units (U) by laser for easy readability.

- In 800 mm wide DSS enclosures, you can choose to adjust the 19" rails to a width of 21".
- In 1.000 mm deep DS enclosures, there is an additional pair of vertical rails installed in half depth. This makes installation of high depth accessories together with standard accessories possible at the same time.
- Space between front vertical 19"-rail and door glass at max. spacing:
 - W600 – 30 mm
 - W800 – 50 mm
- Space between rear vertical 19"-rail and rear panel at max. spacing:
 - W600 – 30 mm
 - W800 – 55 mm
- Maximum distance between vertical rails (19"-rails) in free-standing cabinets:
 - W600 x D800 – 730 mm
 - W600 x D1000 – 930 mm
 - W800 x D800 – 670 mm
 - W800 x D1000 – 870 mm
- Maximum usable depth in free-standing cabinets when installed e.g. on shelves:
 - D800 – 775 mm
 - D1000 – 975 mm
- Spacing between vertical 19"-rails: 451 mm
- Roof construction with opening, 19" punched. Flexible covered by removable plates of different heights to allow installation of fan-units and cable-entry panels. Remaining opening can be closed by use of one these plates.
 - D800 - Opening: 10 U, Covering: 2 x 4 U and 1 x 2 U
 - D1000 - Opening: 12 U, Covering: 2 x 4 U and 2 x 2 U
- Floor construction with opening, 19" punched. Covered by removable plate in full height.
 - D800 - Opening: 10 U, Covering: 1 x 10 U
 - D1000 - Opening: 12 U, Covering: 1 x 12 U
- Roof unit assemblies can also be fitted to floor section. Standard base required.
- Cable entry possible via roof, base and rear panel. Delivered with demountable or break-out blanking plates.
- Brush strip panel for roof (DBK24800) optional.
- Air vents for passive ventilation
- Earthing:
 - M8-Earthing point plus 19"-Earthingset in the rear of the cabinet
 - FastOn-Earthing-connections to all dismountable parts pre-installed
- Included assembly materials:
 - 16 x Cage nuts, bolts and washers M6
 - 4 x Levelling feet
 - 1 x Brush
 - 1 x Edge Protection for cable-entry
- Wide range of available accessories (fan-units, cable entry panels, fixed shelves, patch panels, cable management, PDUs, doors, etc.).
- Enclosure is delivered completely assembled on a disposable pallet.

Технически данни

Нето широчина (mm)	600,00
Нето височина (mm)	1.970,00
Дълбочина (mm)	1.000,00

Технически данни - продължение

Нето тегло (kg)	131,00
Мин. околна температура (°C)	0
Макс. околна температура (°C)	40
Приложимо за HU	42U-1970mm
Цвят	RAL 7035 / RAL 5005 (light grey / blue)

Чертеж: Сървърен шкаф подсилен W600xH2090xD1000 42U, 1500kg, 19", IP30

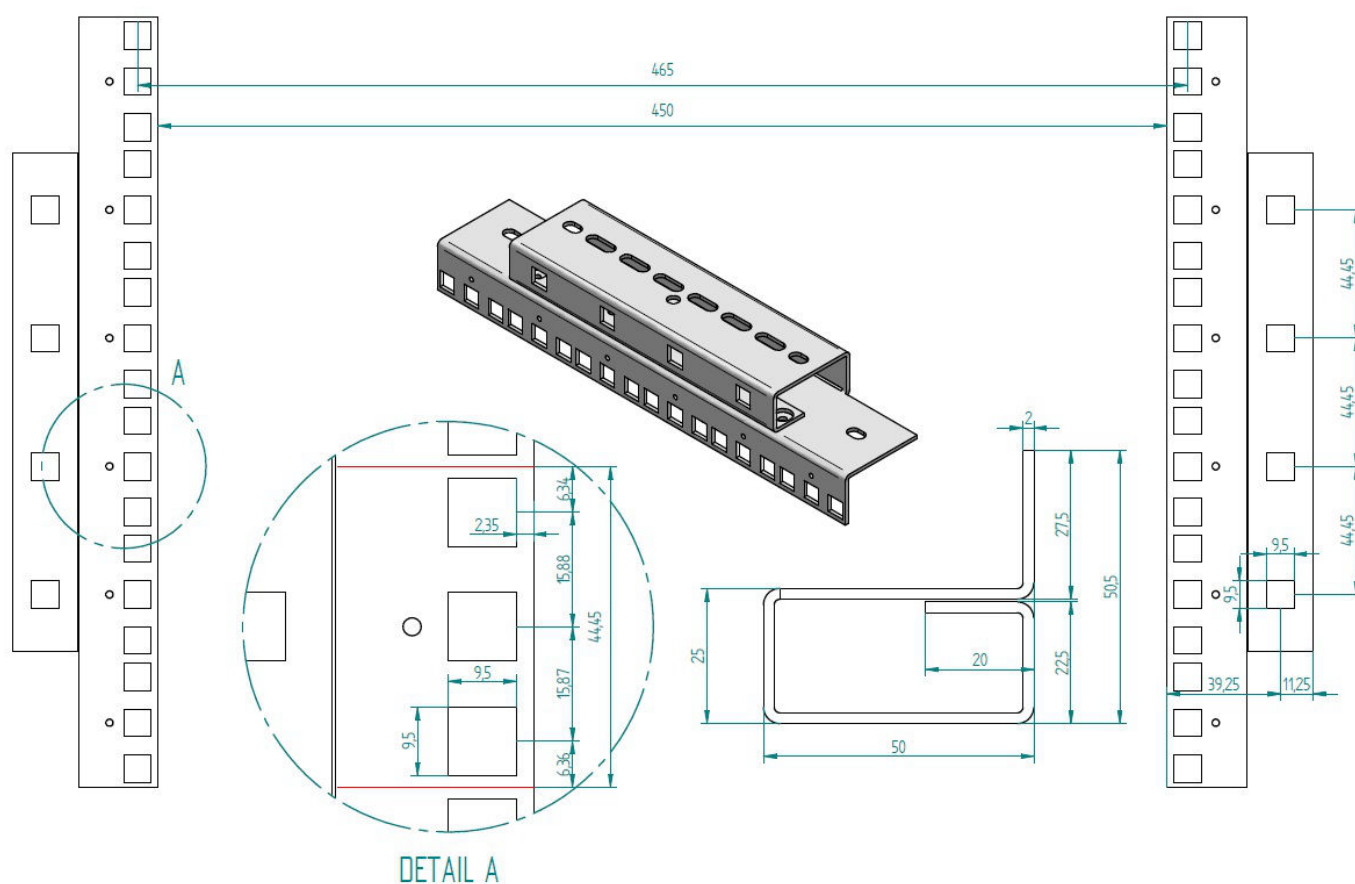


Таблица с артикули

Описание	Артикулен No.
Сървърен шкаф подсилен W600xH2090xD1000 42U, 1500kg, 19", IP30 Front door perforated full width, Reardoor perforated double-wing	DSS4260103
Акcesoари	
Патрон полуцилиндър, с един ключ EK 333	DV900333
Таванен панел с вход за кабели, с четка, 2U, RAL7035	DBK24800
Таванен вент. модул с 2 вент. и термостат, 19", 4U, RAL7035 for freestanding enclosures DS/DSZ and DSS	DLT44802-A
Странични панели за цокъл, D=1000 за DSS, 1500kg Max.Load = 1800kg, RAL7035 Lightgrey	DSSOT1210
Преден/заднен панел за цокъл перф. + филтър, 600mm за DS Standschrank, RAL7035	DSOF1263
19" Аранжиращ панел с 5 метални пръстена, 1U, RAL7035	DBC14805
19" Аранжиращ панел с 5 големи пластм.пръстена, 1U, RAL7035	DBK14805
19" Фиксирана тава D=450mm, 80kg, 1U, RAL7035, перфорирана	DFS14845-C
19" Алуминиев профил PDU, 9хшuko, 1U, 3m-кабел, RAL7035	IU070114-3
Разклонител за 19", 7 x Шuko с арестор, 1.25U, RAL7035 2m-connector cable, RAL7035	IU070113
19" Разклонител, 9хШuko, с ключ, 1U, 2m кабел, черно, ALU ALU Профил	Q7070114-A
19" Разклонител, 7хШuko, с ключ, 1U, защита от пренапрежение 2m-кабел, черен, ALU	Q7070113-A
IT METER LINE PDU пасивен, Вх:CEE 16A черв., Изх:12xC13, 6хШuko	HSMPP312
IT METER LINE PDU с мерене, 36xC13, 6xC19, Темп.сензор, Ethernet	HSMPPM336
PDU-държач вертикален за 600 и 800 mm широки DSS-кутии DST- Enclosures, 1U, 1 PU = 2 pcs. For PDUs with 19" style mounting holder. Installation in enclosure skeleton. Assembly material included	DSSPDU010
PDU-държач вертикален за 600 и 800 mm широки DSS-кутии DST- Enclosures, 2U, 1 PU = 2 pcs. For PDUs with 19" style mounting holder. Installation in enclosure skeleton. Assembly material included	DSSPDU021
PDU-държач вертикален за 600 и 800 mm широки DSS-кутии DST-Enclosures, 2U, 1 PU = 2 pcs. For PDUs with button style mounting holder. Installation in enclosure skeleton. Assembly material included	DSSPDU022
19" Монтажен комплект M6, 50 броя: винт, гайка, шайба	DSSRA050
19" mounting plate, 14U, sheet steel, perforated including screws and cage nuts	DMP1914
Осветителен модул LED, магнит, 230VAC, със сензор за врата автоматична функция, при отваряне на вратата, външен PSU	DTLIGHT01

Таблица с артикули

Описание	Артикулен No.
Акcesoари	
Switch 24xRJ45 10/100/1000, Silent, w/o fan, internal PSU Metal-Chassis, 19"	QLGSW2457
Пач панел празен за 24 порта lightgrey, patchcord lock down	HSER0240GS