

Данни за артикула: DSS4280103

## Сървърен шкаф подсилен W800xH2090xD1000 42U, 1500kg, 19", IP30

Front door perforated full width, Reardoor perforated double-wing



### SCHRACK-Info

- Welded powder-coated sheet steel skeleton 2,0 mm
- Height: 42U
- Widths: 800mm
- Other dimensions and Datacenter-version with flat roof for cold-aisle are available upon request.
- Depth: 1000mm
- Colour: light grey RAL 7035, frame blue RAL 5005
- Maximum static load: 1.800 kg
- Degree of protection: IP20
- IP54 version with Front Glas-door and rearpanel full-metal available upon request.
- Frontdoor full width, Perforated 80% Permeability with handsome swing handle. Prepared for half-cylinder type locks. Halfcylinder lock (Ordernumber: DV900333), Depth= 40mm, Diameter= 17mm, Fixing= M5 Screw, optional available.
- Doors hinged right. Can be changed to hinging on left.
- Frontdoor can be replaced by optional DSRT doors (Glas, Full metal or Perforated, Full width or Double-wing).
- Removeable and lockable side-panels. Key included.
- Reardoor Double-wing, Perforated 80% Permeability with handsome swing handle. Reardoor can be replaced by optional DSRT doors (Glas, Full metal or Perforated, Full width or Double-wing).
- Heavy-Duty base optional: Height = 120 mm
- 19" rails (4 pcs.) galvanised, continuously depthadjustable. Numbering if Height-Units (U) by laser for easy readability.

- In 800 mm wide DSS enclosures, you can choose to adjust the 19" rails to a width of 21".
- In 1.000 mm deep DS enclosures, there is an additional pair of vertical rails installed in half depth. This makes installation of high depth accessories together with standard accessories possible at the same time.
- Space between front vertical 19"-rail and door glass at max. spacing:
  - W600 – 30 mm
  - W800 – 50 mm
- Space between rear vertical 19"-rail and rear panel at max. spacing:
  - W600 – 30 mm
  - W800 – 55 mm
- Maximum distance between vertical rails (19"-rails) in free-standing cabinets:
  - W600 x D800 – 730 mm
  - W600 x D1000 – 930 mm
  - W800 x D800 – 670 mm
  - W800 x D1000 – 870 mm
- Maximum usable depth in free-standing cabinets when installed e.g. on shelves:
  - D800 – 775 mm
  - D1000 – 975 mm
- Spacing between vertical 19"-rails: 451 mm
- Roof construction with opening, 19" punched. Flexible covered by removable plates of different heights to allow installation of fan-units and cable-entry panels. Remaining opening can be closed by use of one these plates.
  - D800 - Opening: 10 U, Covering: 2 x 4 U and 1 x 2 U
  - D1000 - Opening: 12 U, Covering: 2 x 4 U and 2 x 2 U
- Floor construction with opening, 19" punched. Covered by removable plate in full height.
  - D800 - Opening: 10 U, Covering: 1 x 10 U
  - D1000 - Opening: 12 U, Covering: 1 x 12 U
- Roof unit assemblies can also be fitted to floor section. Standard base required.
- Cable entry possible via roof, base and rear panel. Delivered with demountable or break-out blanking plates.
- Brush strip panel for roof (DBK24800) optional.
- Air vents for passive ventilation
- Earthing:
  - M8-Earthing point plus 19"-Earthingset in the rear of the cabinet
  - FastOn-Earthing-connections to all dismountable parts pre-installed
- Included assembly materials:
  - 16 x Cage nuts, bolts and washers M6
  - 4 x Levelling feet
  - 1 x Brush
  - 1 x Edge Protection for cable-entry
- Wide range of available accessories (fan-units, cable entry panels, fixed shelves, patch panels, cable management, PDUs, doors, etc.).
- Enclosure is delivered completely assembled on a disposable pallet.


## Технически данни

|                    |          |
|--------------------|----------|
| Нето широчина (mm) | 800,00   |
| Нето височина (mm) | 1.970,00 |
| Дълбочина (mm)     | 1.000,00 |

## Технически данни - продължение

|                               |                                         |
|-------------------------------|-----------------------------------------|
| Нето тегло (kg)               | 148,00                                  |
| Мин. околна температура (°C)  | 0                                       |
| Макс. околна температура (°C) | 40                                      |
| Приложимо за HU               | 42U-1970mm                              |
| Цвят                          | RAL 7035 / RAL 5005 (light grey / blue) |

## Чертеж: Сървърен шкаф подсилен W800xH2090xD1000 42U, 1500kg, 19", IP30

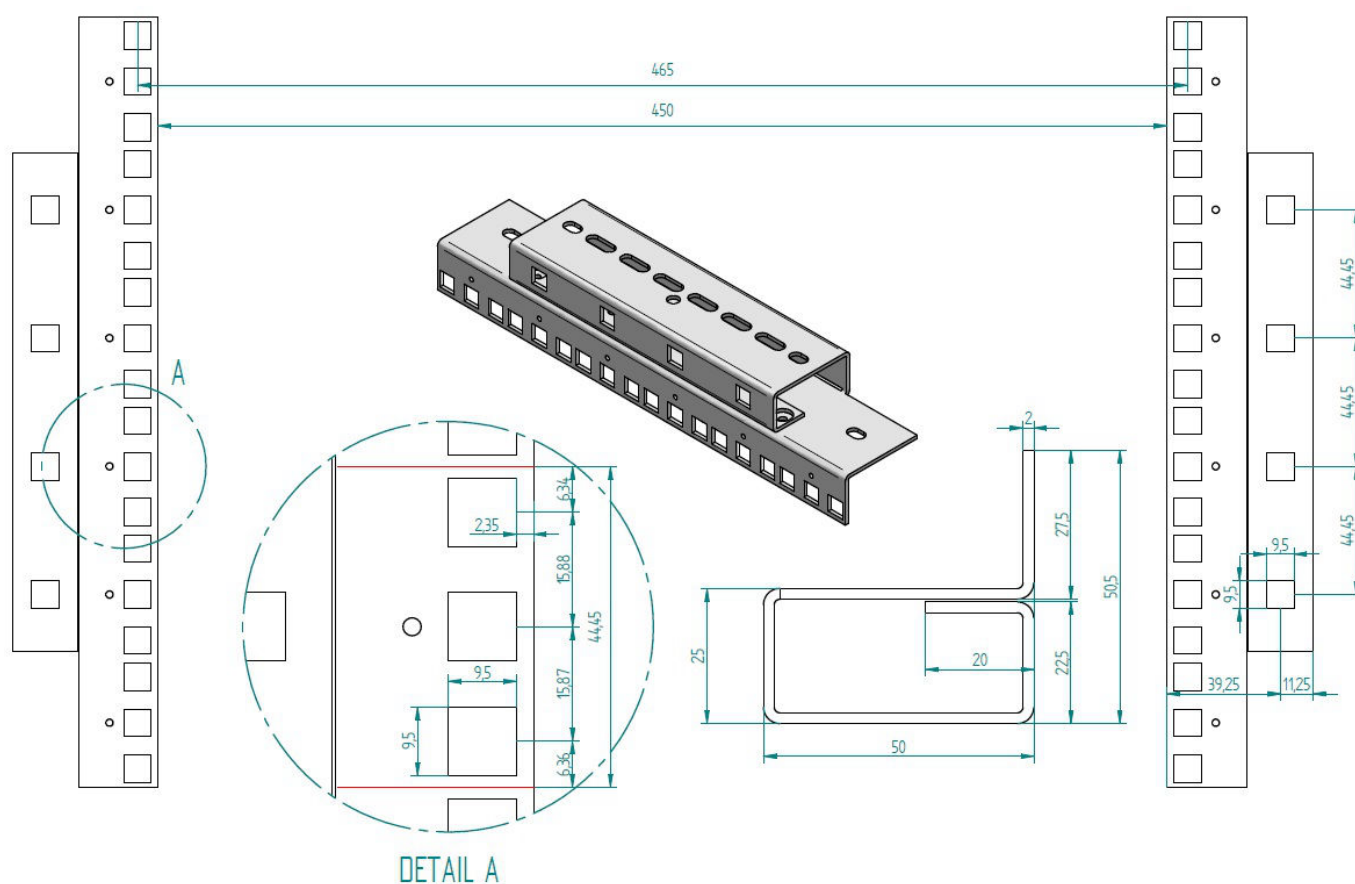

| Описание                                                                                                                            | Артикулен No. |
|-------------------------------------------------------------------------------------------------------------------------------------|---------------|
| Сървърен шкаф подсилен W800xH2090xD1000 42U, 1500kg, 19", IP30<br>Front door perforated full width, Reardoor perforated double-wing | DSS4280103    |
| <b>Акcesoари</b>                                                                                                                    |               |

## Таблица с артикули

| Описание                                                                                                                                                                                               | Артикулен No. |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| <b>Акcesoари</b>                                                                                                                                                                                       |               |
| Патрон полуцилиндър, с един ключ EK 333                                                                                                                                                                | DV900333      |
| Без крепежен винт в комплекта! Крепежният винт е в комплект с бравата на таблото!                                                                                                                      |               |
| Таванен панел с вход за кабели, с четка, 2U, RAL7035                                                                                                                                                   | DBK24800      |
| Таванен вент. модул с 2 вент. и термостат, 19", 4U, RAL7035<br>for freestanding enclosures DS/DSZ and DSS                                                                                              | DLT44802-A    |
| Странични панели за цокъл, D=1000 за DSS, 1500kg<br>Max.Load = 1800kg, RAL7035 Lightgrey                                                                                                               | DSSOT1210     |
| Преден/заднен панел за цокъл перф. + филтър, 800mm за DS<br>Standschrank, RAL7035                                                                                                                      | DSOF1283      |
| 19" Аранжиращ панел с 5 метални пръстена, 1U, RAL7035                                                                                                                                                  | DBC14805      |
| 19" Аранжиращ панел с 5 големи пластм.пръстена, 1U, RAL7035                                                                                                                                            | DBK14805      |
| 19" Фиксирана тава D=450mm, 80kg, 1U, RAL7035, перфорирана                                                                                                                                             | DFS14845-C    |
| 19" Алюминиев профил PDU, 9хшүко, 1U, 3м-кабел, RAL7035                                                                                                                                                | IU070114-3    |
| Разклонител за 19", 7 x Шүко с арестор, 1.25U, RAL7035<br>2m-connector cable, RAL7035                                                                                                                  | IU070113      |
| 19" Разклонител, 9хШүко, с ключ, 1U, 2м кабел, черно, ALU<br>ALU Профил                                                                                                                                | Q7070114-A    |
| 19" Разклонител, 7хШүко, с ключ, 1U, защита от пренапрежение<br>2м-кабел, черен, ALU                                                                                                                   | Q7070113-A    |
| IT METER LINE PDU пасивен, Вх:CEE 16А черв., Изх:12хС13, 6хШүко                                                                                                                                        | HSMPP312      |
| IT METER LINE PDU с мерене, 36хС13, 6хС19, Темп.сензор, Ethernet                                                                                                                                       | HSMPP336      |
| PDU-държач вертикален за 600 и 800 mm широки DSS-кутии<br>DST- Enclosures, 1U, 1 PU = 2 pcs. For PDUs with 19" style mounting holder. Installation in enclosure skeleton. Assembly material included   | DSSPDU010     |
| PDU-държач вертикален за 600 и 800 mm широки DSS-кутии<br>DST- Enclosures, 2U, 1 PU = 2 pcs. For PDUs with 19" style mounting holder. Installation in enclosure skeleton. Assembly material included   | DSSPDU021     |
| PDU-държач вертикален за 600 и 800 mm широки DSS-кутии<br>DST-Enclosures, 2U, 1 PU = 2 pcs. For PDUs with button style mounting holder. Installation in enclosure skeleton. Assembly material included | DSSPDU022     |
| 19" Монтажен комплект M6, 50 броя: винт, гайка, шайба                                                                                                                                                  | DSSRA050      |
| 19" mounting plate, 14U, sheet steel, perforated<br>including screws and cage nuts                                                                                                                     | DMP1914       |
| Осветителен модул LED, магнит, 230VAC, със сензор за врата<br>автоматична функция, при отваряне на вратата, външен PSU                                                                                 | DTLIGHT01     |
| Switch 24xRJ45 10/100/1000, Silent, w/o fan, internal PSU<br>Metal-Chassis, 19"                                                                                                                        | QLGSW2457     |

## Таблица с артикули

| Описание                                                       | Артикулен No. |
|----------------------------------------------------------------|---------------|
| <b>Акcesoари</b>                                               |               |
| Пач панел празен за 24 порта<br>lightgrey, patchcord lock down | HSER0240GS    |