

Данни за артикула: DSS428020B

Сървърен шкаф DSS, W800xH1970xD1200, 19" 42U, 1800kg товар

RAL9005 Black, Front door perforated full width, Reardoor perforated double-wing



SCHRACK-Info


- Welded powder-coated sheet steel skeleton 2,0 mm
- Height: 42U
- Width: 800mm
- Other dimensions and Datacenter-version with flat roof for cold-aisle are available upon request.
- Depth: 1.200 mm
- Colour: RAL9005 Black
- Maximum static load: 1.800 kg
- Degree of protection: IP20
- IP54 version with Front Glas-door and rearpanel full-metal available upon request.
- Frontdoor full width, Perforated 80% Permeability with handsome swing handle. Prepared for half-cylinder type locks. Halfcylinder lock (Ordernumber: DV900333), Depth= 40mm, Diameter= 17mm, Fixing= M5 Screw, optional available.
- Doors hinged right. Can be changed to hinging on left.
- Frontdoor can be replaced by optional DSRT doors (Glas, Full metal or Perforated, Full width or Double-wing).
- Removeable and lockable side-panels. Key included.
- Reardoor Double-wing, Perforated 80% Permeability with handsome swing handle. Reardoor can be replaced by optional DSRT doors (Glas, Full metal or Perforated, Full width or Double-wing).
- Heavy-Duty base optional: Height = 120 mm
- 19" rails (4 pcs.) galvanised, continuously depthadjustable. Numbering if Height-Units (U) by laser for easy readability.

- In 800 mm wide DSS enclosures, you can choose to adjust the 19" rails to a width of 21".
- In 1.000 and 1.200mm deep DS enclosures, there is an additional pair of vertical rails installed in half depth. This makes installation of high depth accessories together with standard accessories possible at the same time.
- Space between front vertical 19"-rail and door glass at max. spacing:
 - W600 – 30 mm
 - W800 – 50 mm
- Space between rear vertical 19"-rail and rear panel at max. spacing:
 - W600 – 30 mm
 - W800 – 55 mm
- Maximum distance between vertical rails (19"-rails) in free-standing cabinets:
 - W600 x D800 – 730 mm
 - W600 x D1000 – 930 mm
 - W800 x D800 – 670 mm
 - W800 x D1000 – 870 mm
 - W800 x D1200 – 1070 mm
- Maximum usable depth in free-standing cabinets when installed e.g. on shelves:
 - D800 – 775 mm
 - D1000 – 975 mm
 - D1200 – 1175 mm
- Spacing between vertical 19"-rails: 451 mm
- Roof construction with opening, 19" punched. Flexible covered by removable plates of different heights to allow installation of fan-units and cable-entry panels. Remaining opening can be closed by use of one these plates.
 - D800 - Opening: 10 U, Covering: 2 x 4 U and 1 x 2 U
 - D1000 - Opening: 12 U, Covering: 2 x 4 U and 2 x 2 U
 - D1200 - Opening: 12 U, Covering: 2 x 4 U and 2 x 2 U
- Floor construction with opening, 19" punched. Covered by removable plate in full height.
 - D800 - Opening: 10 U, Covering: 1 x 10 U
 - D1000 - Opening: 12 U, Covering: 1 x 12 U
 - D1200 - Opening: 12 U, Covering: 1 x 12 U
- Roof unit assemblies can also be fitted to floor section. Standard base required.
- Cable entry possible via roof, base and rear panel. Delivered with demountable or break-out blanking plates.
- Brush strip panel for roof (DBK24800) optional.
- Air vents for passive ventilation
- Earthing:
 - M8-Earthing point plus 19"-Earthingset in the rear of the cabinet
 - FastOn-Earthing-connections to all dismountable parts pre-installed
- Included assembly materials:
 - 16 x Cage nuts, bolts and washers M6
 - 4 x Levelling feet
 - 1 x Brush
 - 1 x Edge Protection for cable-entry
- Wide range of available accessories (fan-units, cable entry panels, fixed shelves, patch panels, cable management, PDUs, doors, etc.).
- Enclosure is delivered completely assembled on a disposable pallet.

Технически данни

Нето широчина (mm)	800,00
Нето височина (mm)	1.970,00
Дълбочина (mm)	1.200,00
Нето тегло (kg)	163,00
Мин. околна температура (°C)	0
Макс. околна температура (°C)	40
Приложимо за НУ	42U-1970mm
Цвят	RAL 9005 (black)

Чертеж: Сървърен шкаф DSS, W800xH1970xD1200, 19" 42U, 1800kg товар

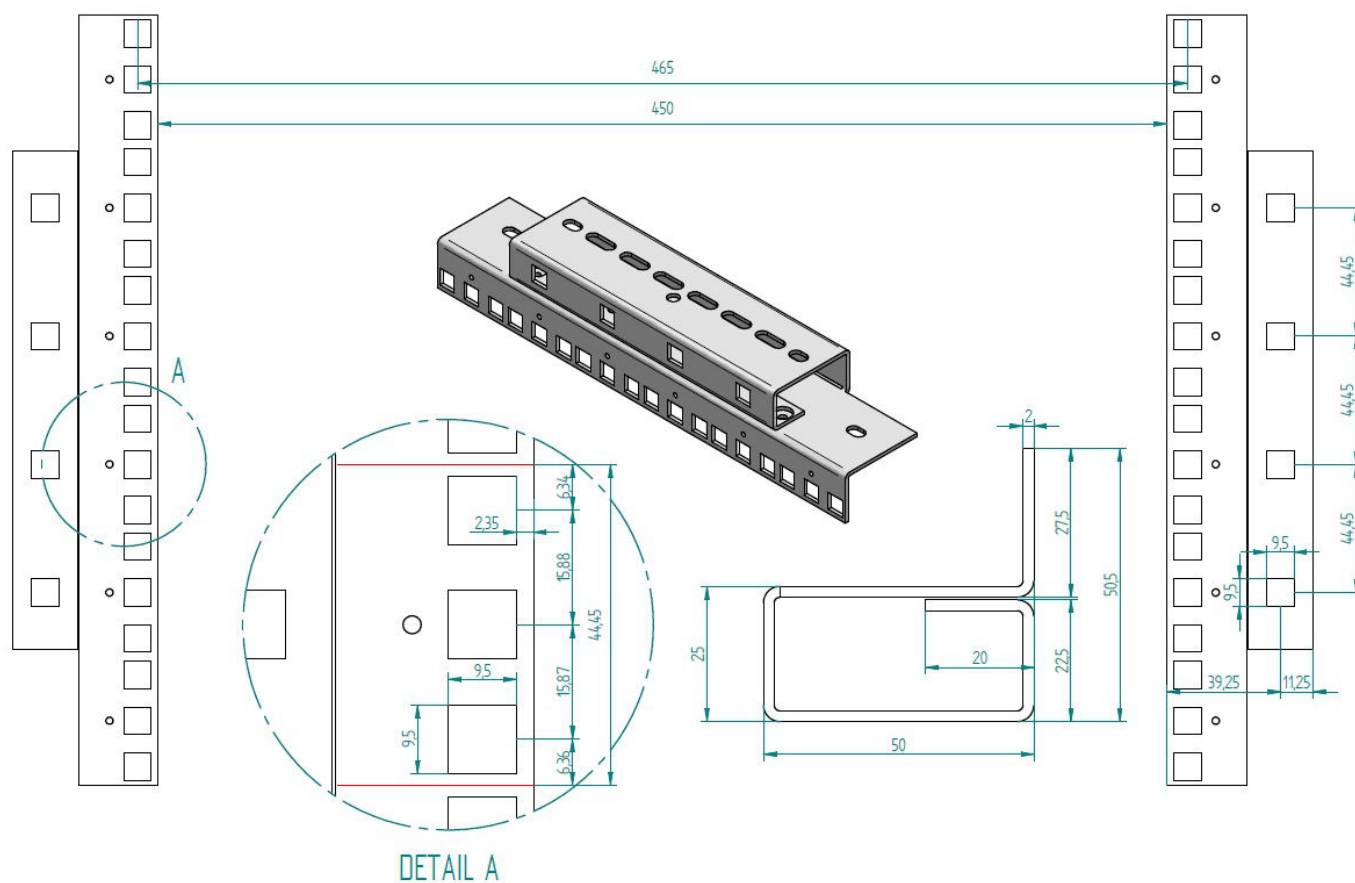

Описание	Артикулен No.
Сървърен шкаф DSS, W800xH1970xD1200, 19" 42U, 1800kg товар	DSS428020B
RAL9005 Black, Front door perforated full width, Reardoor perforated double-wing	

Таблица с артикули

Описание	Артикулен No.
Акcesoари	
Акcesoари	
Half cylinder lock keyed EK 333 including 1 key including 1x countersunk screw M5x16mm V2A	DV900333S
Четка за кабелен вход, 2U, RAL9005	DBK24800-B
Таванен вент. модул с 2 вент. и термостат, 19", 4U, RAL9005 Black for freestanding enclosures DS/DSZ and DSS	DLT44802-B
Страничен панел за цокъл, D=1200, H=120, DSS, RAL9005 RAL9005 Black	DSSOT1220B
Преден/заднен панел за цокъл перф. + филтър, W=800 DS/DSZ/DSS Standschrank, RAL9005 Black	DSOF1283-B
19" Аранжиращ панел, 1U, 5 метални пръстена, 63mm, RAL9005	DTBC105R-B
19" Аранжиращ панел, 5 метални пръстена 80x40mm, 1U, RAL9005	DBC14805-B
19" Аранжиращ панел, 5 пръстена 40x83mm, 1U, RAL9005 Черно	DBK14805-B
19" Фиксирана тава, до 80kg Товар, D=450mm, 1U, RAL9005	DFS14845-T
19" Алуминиев профил PDU, 9xшuko, 1U, 3m-кабел, RAL7035	IU070114-3
Разклонител за 19", 7 x Шuko с арестор, 1.25U, RAL7035 2m-connector cable, RAL7035	IU070113
19" Разклонител, 9xШuko, с ключ, 1U, 2m кабел, черно, ALU ALU Профил	Q7070114-A
19" Разклонител, 7xШuko, с ключ, 1U, защита от пренапрежение 2m-кабел, черен, ALU	Q7070113-A
IT METER LINE PDU пасивен, Вх:CEE 16A черв., Изх:12xC13, 6xШuko	HSMPP312
IT METER LINE PDU с мерене, 36xC13, 6xC19, Темп.сензор, Ethernet	HSMPP336
PDU-държач вертикален за 600 и 800 mm широки DSS-кутии DST- Enclosures, 1U, 1 PU = 2 pcs. For PDUs with 19" style mounting holder. Installation in enclosure skeleton. Assembly material included	DSSPDU010
PDU-държач вертикален за 600 и 800 mm широки DSS-кутии DST- Enclosures, 2U, 1 PU = 2 pcs. For PDUs with 19" style mounting holder. Installation in enclosure skeleton. Assembly material included	DSSPDU021
PDU-държач вертикален за 600 и 800 mm широки DSS-кутии DST-Enclosures, 2U, 1 PU = 2 pcs. For PDUs with button style mounting holder. Installation in enclosure skeleton. Assembly material included	DSSPDU022
19" Монтажен комплект M6, 50 броя: винт, гайка, шайба	DSSRA050
19" mounting plate, 14U, sheet steel, perforated including screws and cage nuts	DMP1914

Таблица с артикули

Описание	Артикулен No.
Акcesoари	
Осветителен модул LED, магнит, 230VAC, със сензор за врата автоматична функция, при отваряне на вратата, външен PSU	DTLIGHT01
Switch 24xRJ45 10/100/1000, Silent, w/o fan, internal PSU Metal-Chassis, 19"	QLGSW2457
Пач панел 19" празен, 24 модула (SFA)(SFB), 1U, черен ECO черно, единично закрепване, фиксиране на пач кабелите	HSER0240SP