

Данни за артикула: DT476010--

# Комуникационен шкаф стоящ S-RACK, W600 H2232 D1000 19" 47U



## SCHRACK-Info

The S-RACK 19" freestanding network enclosure is the perfect solution for offices and similar environments. It is suitable for use as a central enclosure in network installations, but also as a sub-enclosure in the horizontal area of a structured cabling system.

The removable side and rear panels allow comfortable and easy access from all sides.

Cooling of the built-in components is achieved passively by heat exchange with the outside area and actively by optional roof fans.

Cable entry is very flexible due to various prepared opening possibilities or the optional base.

The S-RACK enclosures are designed for universal use and cover the widest possible range of applications.

- **Material thickness:**

- Top and bottom chassis: 1.5mm
- Corner profile: 1.2mm
- Rails: 1.5mm
- Front door (glass): 4.0mm
- Rear panel: 0.8mm
- Side panel: 0.8mm

- **Colour:**

- RAL7035 (light grey)
- Corner profile, top and bottom chassis: RAL5005 (signal blue)

- **Height:** 47U

- **Width:** 600mm

- **Depth:** 1.000mm

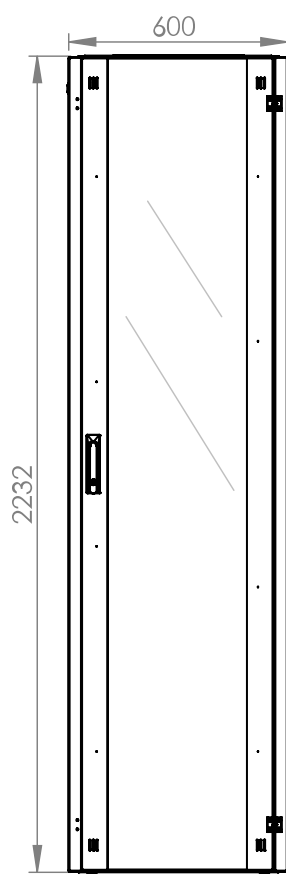
- **Maximum load:** with even distribution: 800kg

- **Degree of protection:** IP20
- **Dismountability:** The individual parts of the cabinet are screwed. The enclosure is delivered assembled and can be partially or completely disassembled for transport to places that are difficult to access.
- **Doors:** Glass door including comfort swing handle with lock and keys. A conversion kit for half cylinders (DTZLOCK02) is optionally available. External hinge system allows door opening angle of up to 180°. Door hinged on the right. Conversion to left hinged door is possible. Glass door can be replaced by optionally available doors DTRT (full metal or perforated, full width or double door).
- **Side and back panels:** Removable side and back panels with lock and keys. Rear wall can be replaced by optionally available doors DTRT (glass, full metal or perforated, full width or double door).
- **Cable entry options:** In roof and floor. Fitted with plastic blank covers. The floor also accommodates a large break-out blank plate which can be easily removed for cable entry. Brush entry DTBB optionally available.
- **Cooling:** Passive cooling through heat exchange with the outside area. Ventilation slots on the roof are prepared for cooling. Active cooling through optional DTLT fan units.
- **Rails:** 19" rails (4 pieces), depth adjustable, U markings included
- **Accessories:** Numerous accessories (base sets, fans, shelves, cable management, doors, etc.) available
- **Earthing:** Earthing set is included
- **Levelling Feet:** Levelling Feet are included
- **Included mounting material:** 16 pieces cage nuts, screws and washers
- **Delivery:** Enclosure is delivered fully assembled on a throw-away pallet.

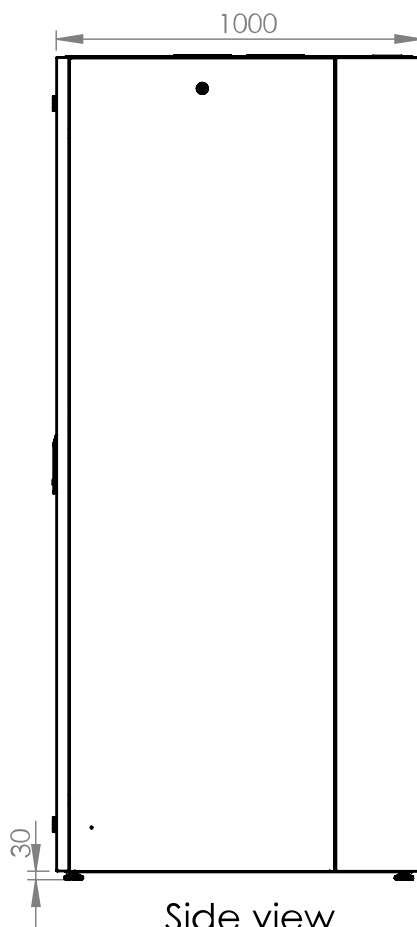


## Технически данни

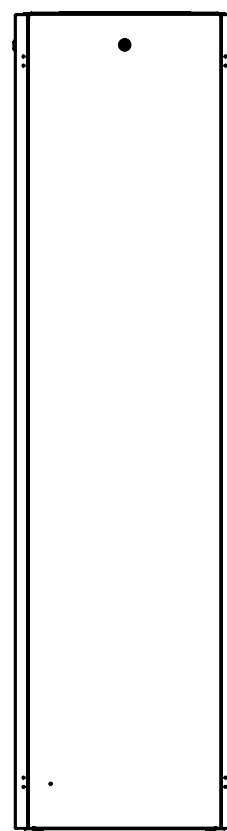
|                               |                                         |
|-------------------------------|-----------------------------------------|
| Нето широчина (mm)            | 600,00                                  |
| Нето височина (mm)            | 2.232,00                                |
| Дълбочина (mm)                | 1.000,00                                |
| Нето тегло (kg)               | 94,60                                   |
| EAN                           | 9004840868210                           |
| Мин. околна температура (°C)  | 5                                       |
| Макс. околна температура (°C) | 40                                      |
| HU                            | 47                                      |
| Цвят                          | RAL 7035 / RAL 5005 (light grey / blue) |
| Степен на защита - IP         | IP20                                    |
| максимално натоварване (kg)   | 800                                     |
| Серия                         | S-RACK                                  |

**Чертеж: Комуникационен шкаф стоящ S-RACK, W600 H2232 D1000 19" 47U**

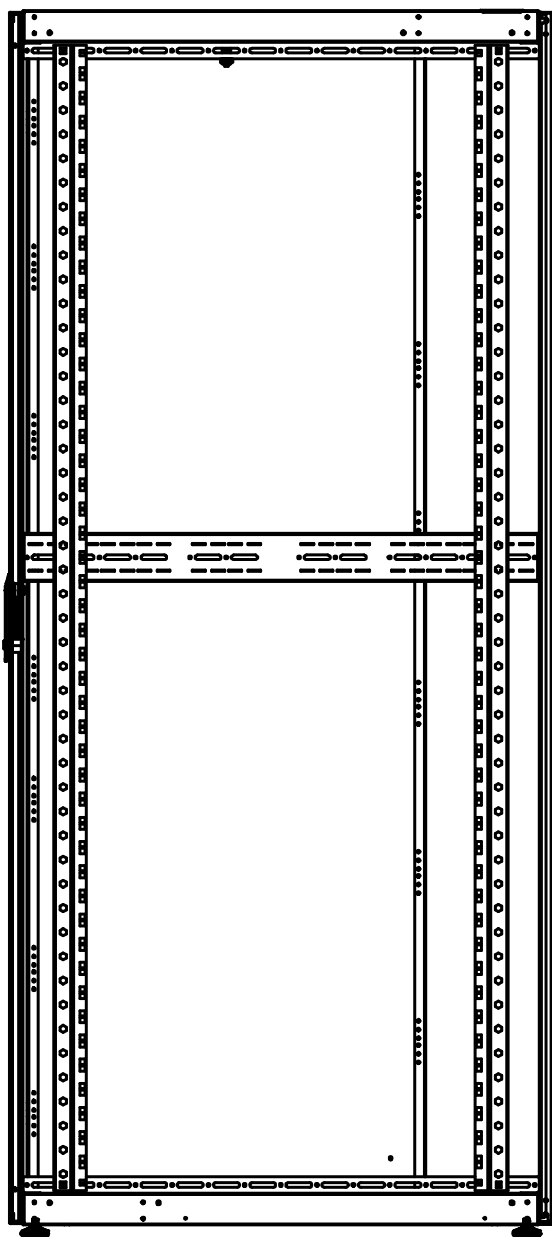
Front view



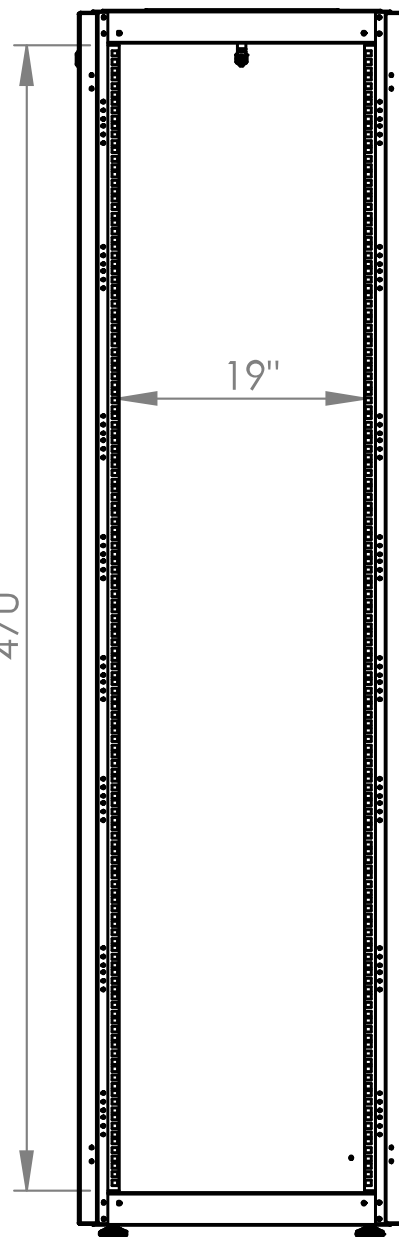
Side view



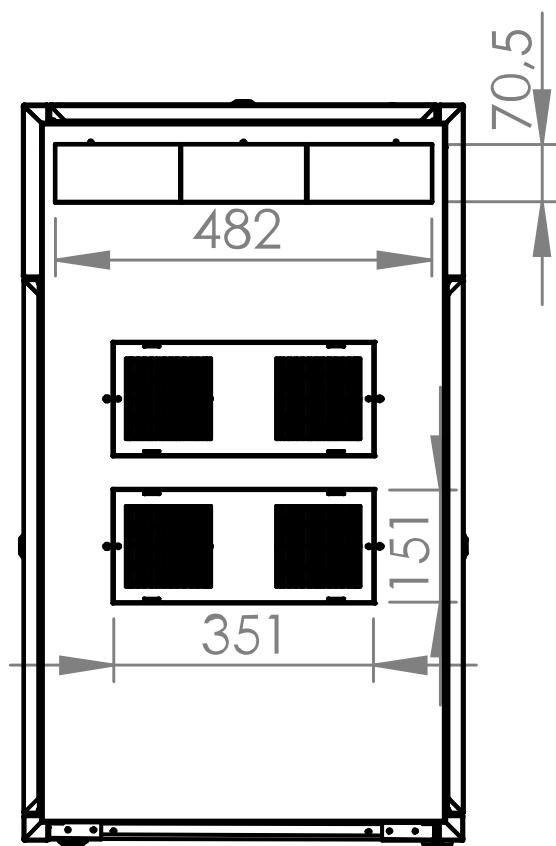
Rear view

**Чертеж: Комуникационен шкаф стоящ S-RACK, W600 H2232 D1000 19" 47U**

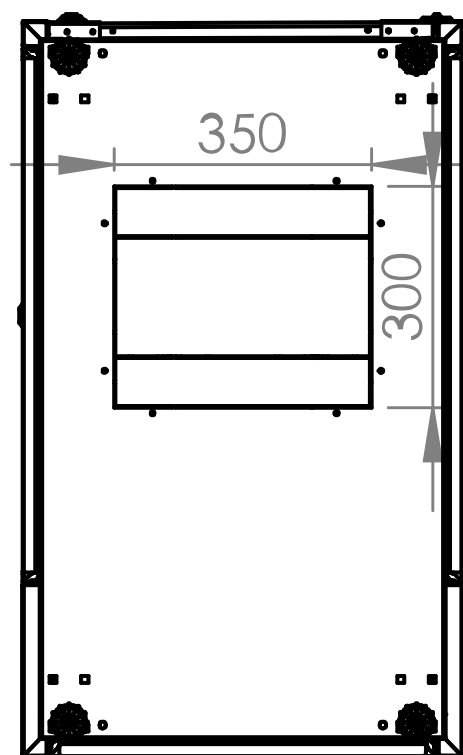
Side inside view



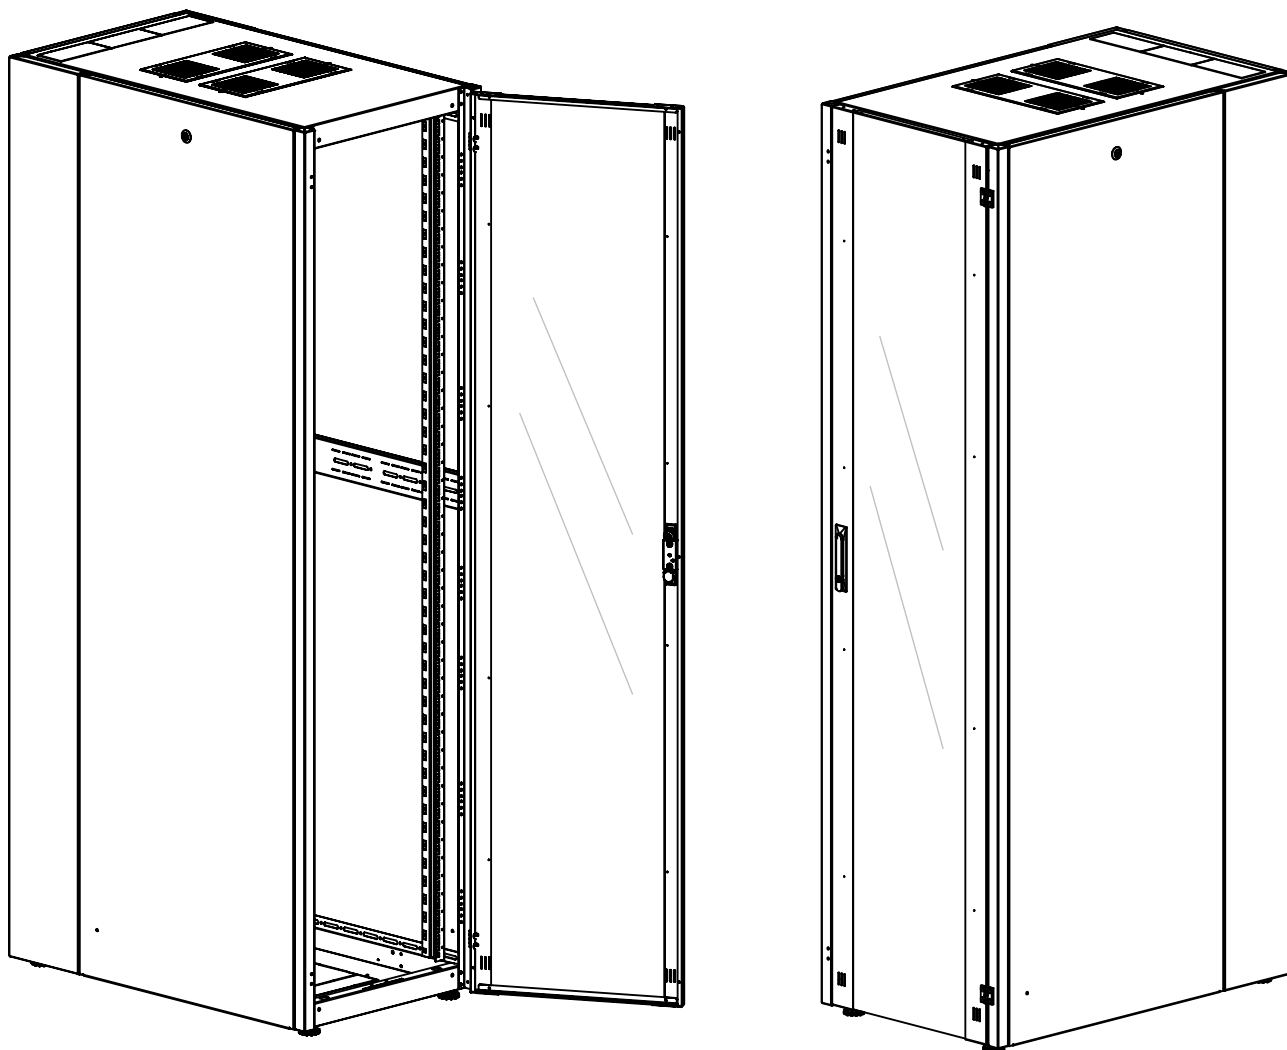
Front inside view

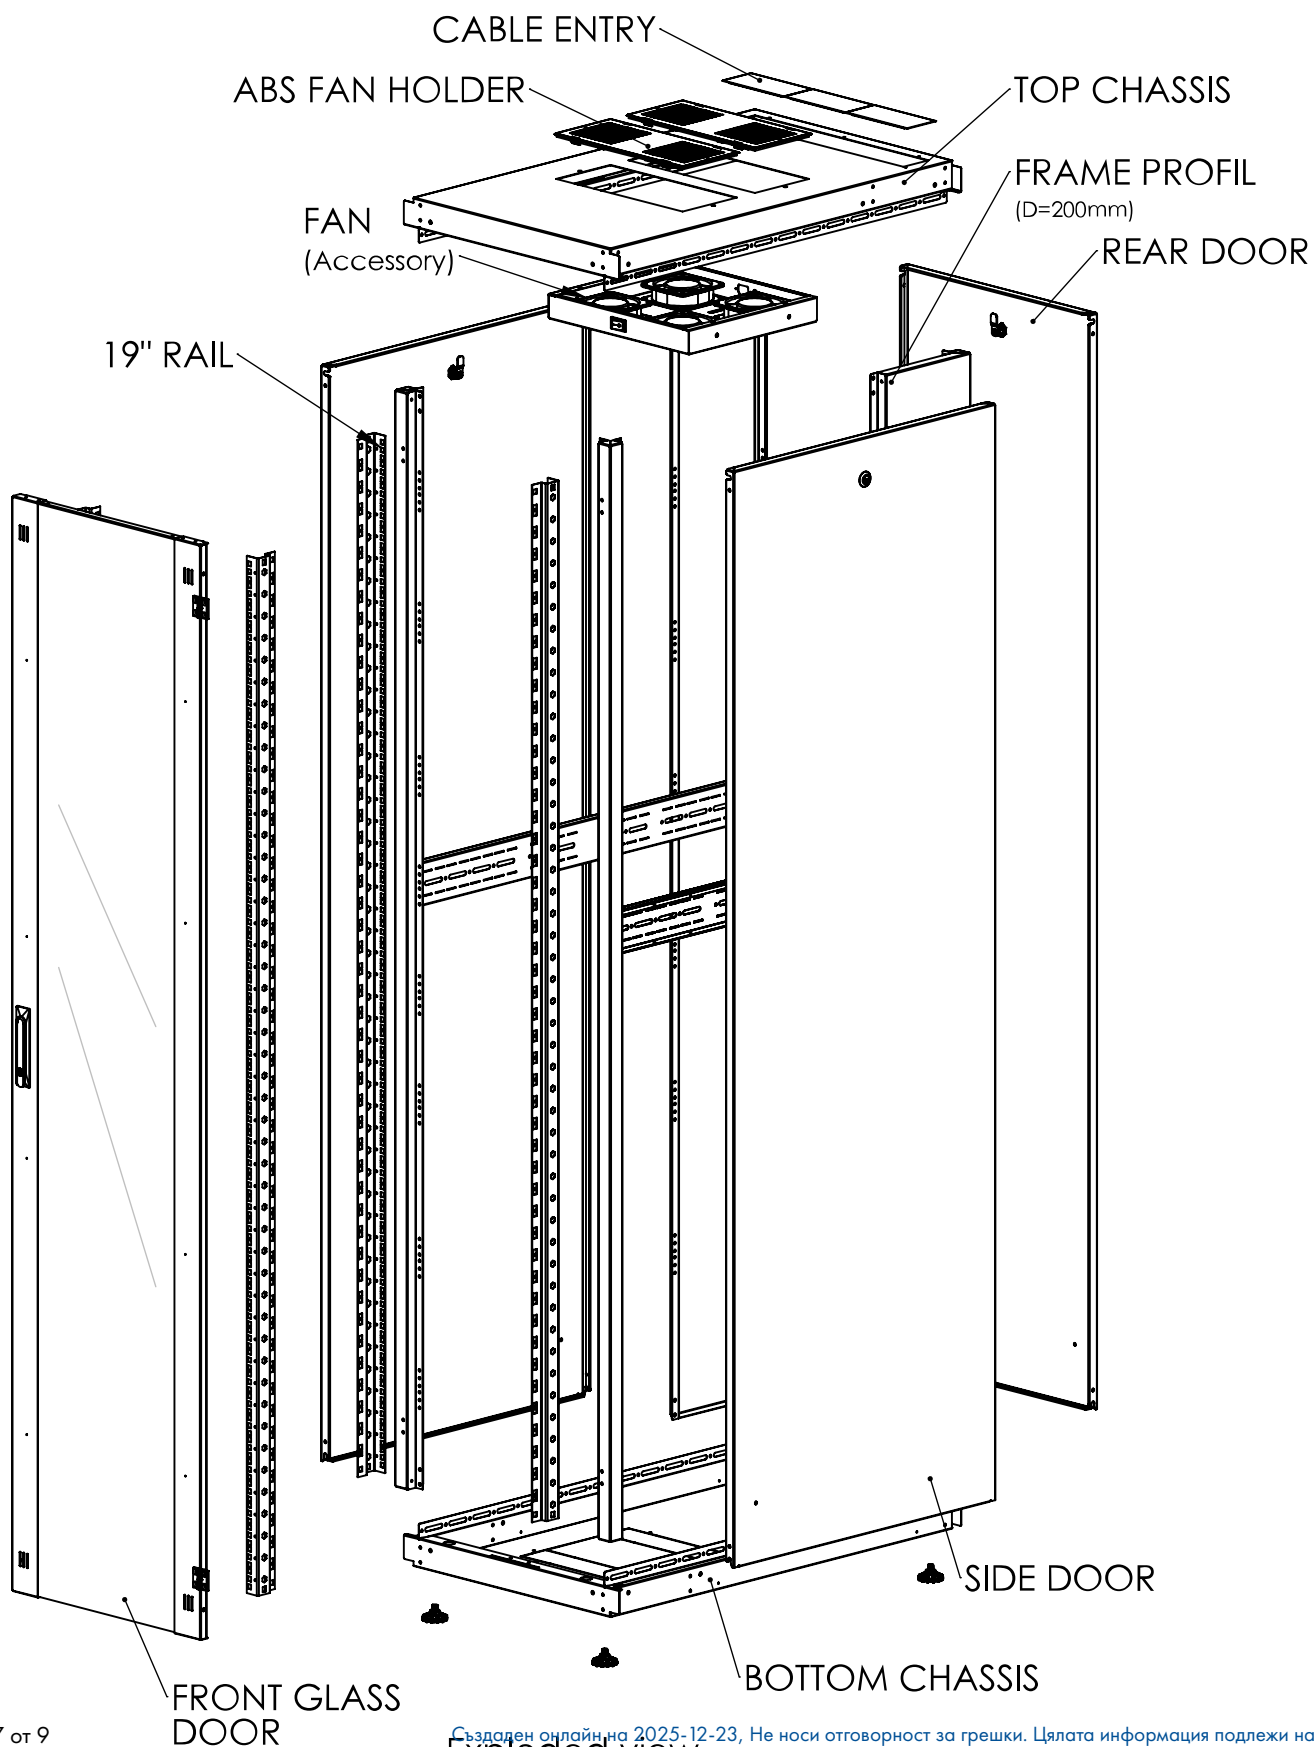
**Чертеж: Комуникационен шкаф стоящ S-RACK, W600 H2232 D1000 19" 47U**

Top view



Bottom view

**Чертеж: Комуникационен шкаф стоящ S-RACK, W600 H2232 D1000 19" 47U**

**Чертеж: Комуникационен шкаф стоящ S-RACK, W600 H2232 D1000 19" 47U**

стр. 7 от 9

Създаден онлайн на 2025-12-23, Не носи отговорност за грешки. Цялата информация подлежи на промяна.  
Exploded view

## Таблица с артикули

| Описание                                                                                                                                  | Артикулен No. |
|-------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| Комуникационен шкаф стоящ S-RACK, W600 H2232 D1000 19" 47U                                                                                | DT476010      |
| <b>Акcesoари</b>                                                                                                                          |               |
| Цокъл H=100 за S-RACK табло W=600 D=1000, RAL7035                                                                                         | DTOT106010    |
| Вентилаторен модул за таван 2вент.Аналогов термостат,RAL7035                                                                              | DTLTR02A      |
| Светлосиво, за стоящи и стенни шкафове                                                                                                    |               |
| Вентилаторен модул за таван 4 вентилатора.Цифров термостат RAL7035 Светлосиво, монтаж от вътрешната страна                                | DTLTR04D      |
| Вентилаторен модул за таван 4 вент.Аналогов термостат RAL7035 Светлосиво, монтаж от вътрешната страна                                     | DTLTR04A      |
| Четка за кабелен вход за таван/под S-RACK стоящ шкаф 70x316mm                                                                             | DTZBRUSH02    |
| Четка за кабелен вход за таван/под S-RACK стоящ шкаф 70x500mm                                                                             | DTZBRUSH03    |
| Комплект дръжка за патрон полуцилиндър S-RACK Стоящи шкафове                                                                              | DTZLOCK02     |
| Св. комплект за ком. табла DT, дълб. 800 и 1000mm, RAL5005<br>1 set = 2 covers (for top and bottom) + 8x screws 6.3 x 12                  | DTRA0800      |
| 19" Фиксирана тава, до 50kg товар, D=720mm, 1U, RAL7036<br>4 Point Fixing                                                                 | DTFF1720      |
| 19" Фиксирана тава, 2U, до 50Kg товар, D=650mm, Нисък профил<br>4 точки на фиксиране, RAL7035                                             | DTFL2650      |
| 19" Аранжиращ панел за кабели, 1U,5 метални пръстена,RAL7036                                                                              | DTBC105R      |
| К-т крепежни елементи за 19" М6, 50 винта, гайки и шайби                                                                                  | DTSRA050      |
| Осветителен модул LED, магнит, 230VAC, със сензор за врата<br>автоматична функция, при отваряне на вратата, външен PSU                    | DTLIGHT01     |
| 19" Комплект за заземяване, 1U, 10 точки<br>4 броя x 4 мм в диаметър x 40 см дълги жълти / зелени проводници, включително винтове и гайки | DTRE0001      |
| Пач панел празен за 24 порта<br>lightgrey, patchcord lock down                                                                            | HSER0240GS    |
| 19" Алюминиев профил PDU, 9хшuko, 1U, 3m-кабел, RAL7035                                                                                   | IU070114-3    |
| Разклонител за 19", 7 x Шuko с арестор, 1.25U, RAL7035<br>2m-connector cable, RAL7035                                                     | IU070113      |
| 19" Разклонител, 9хШuko, с ключ, 1U, 2m кабел, черно, ALU<br>ALU Профил                                                                   | Q7070114-A    |
| 19" Разклонител, 7хШuko, с ключ, 1U, защита от пренапрежение<br>2m-кабел, черен, ALU                                                      | Q7070113-A    |



## Таблица с артикули

| Описание                                                  | Артикулен No. |
|-----------------------------------------------------------|---------------|
| <b>Акcesoари</b>                                          |               |
| Switch 24xRJ45 10/100/1000, Silent, w/o fan, internal PSU | QLGSW2457     |
| Metal-Chassis, 19"                                        |               |