

Данни за артикула: DT476080--

Комуникационен шкаф стоящ S-RACK, W600 H2232 D800, 19" 47U



SCHRACK-Info

The S-RACK 19" freestanding network enclosure is the perfect solution for offices and similar environments. It is suitable for use as a central enclosure in network installations, but also as a sub-enclosure in the horizontal area of a structured cabling system.

The removable side and rear panels allow comfortable and easy access from all sides.

Cooling of the built-in components is achieved passively by heat exchange with the outside area and actively by optional roof fans.

Cable entry is very flexible due to various prepared opening possibilities or the optional base.

The S-RACK enclosures are designed for universal use and cover the widest possible range of applications.

- **Material thickness:**

- Top and bottom chassis: 1.5mm
- Corner profile: 1.2mm
- Rails: 1.5mm
- Front door (glass): 4.0mm
- Rear panel: 0.8mm
- Side panel: 0.8mm

- **Colour:**

- RAL7035 (light grey)
- Corner profile, top and bottom chassis: RAL5005 (signal blue)

- **Height:** 47U

- **Width:** 600mm

- **Depth:** 800mm

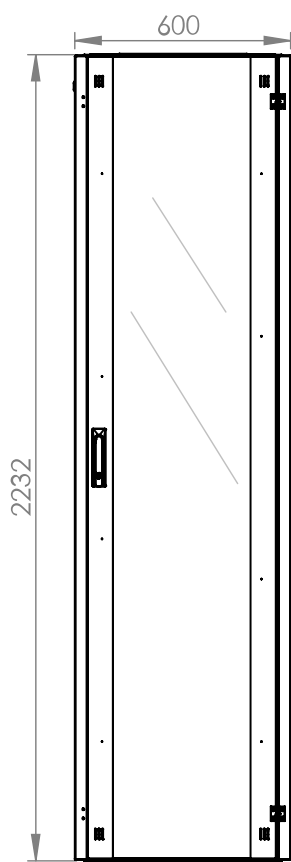
- **Maximum load:** with even distribution: 800kg

- **Degree of protection:** IP20
- **Dismountability:** The individual parts of the cabinet are screwed. The enclosure is delivered assembled and can be partially or completely disassembled for transport to places that are difficult to access.
- **Doors:** Glass door including comfort swing handle with lock and keys. A conversion kit for half cylinders (DTZLOCK02) is optionally available. External hinge system allows door opening angle of up to 180°. Door hinged on the right. Conversion to left hinged door is possible. Glass door can be replaced by optionally available doors DTRT (full metal or perforated, full width or double door).
- **Side and back panels:** Removable side and back panels with lock and keys. Rear wall can be replaced by optionally available doors DTRT (glass, full metal or perforated, full width or double door).
- **Cable entry options:** In roof and floor. Fitted with plastic blank covers. The floor also accommodates a large break-out blank plate which can be easily removed for cable entry. Brush entry DTBB optionally available.
- **Cooling:** Passive cooling through heat exchange with the outside area. Ventilation slots on the roof are prepared for cooling. Active cooling through optional DTLT fan units.
- **Rails:** 19" rails (4 pieces), depth adjustable, U markings included
- **Accessories:** Numerous accessories (base sets, fans, shelves, cable management, doors, etc.) available
- **Earthing:** Earthing set is included
- **Levelling Feet:** Levelling Feet are included
- **Included mounting material:** 16 pieces cage nuts, screws and washers
- **Delivery:** Enclosure is delivered fully assembled on a throw-away pallet.

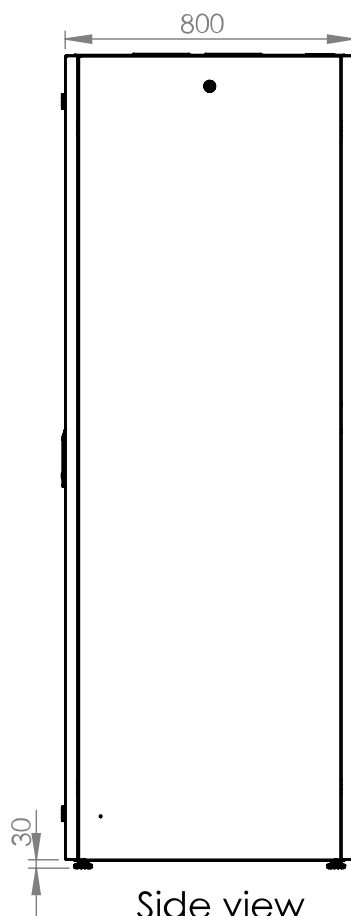


Технически данни

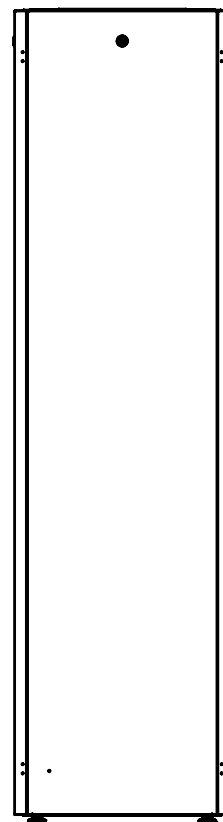
Нето широчина (mm)	600,00
Нето височина (mm)	2.232,00
Дълбочина (mm)	800,00
Нето тегло (kg)	82,00
EAN	9004840868050
Мин. околна температура (°C)	5
Макс. околна температура (°C)	40
HU	47
Цвят	RAL 7035 / RAL 5005 (light grey / blue)
Степен на защита - IP	IP20
максимално натоварване (kg)	800
Серия	S-RACK

Чертеж: Комуникационен шкаф стоящ S-RACK, W600 H2232 D800, 19" 47U

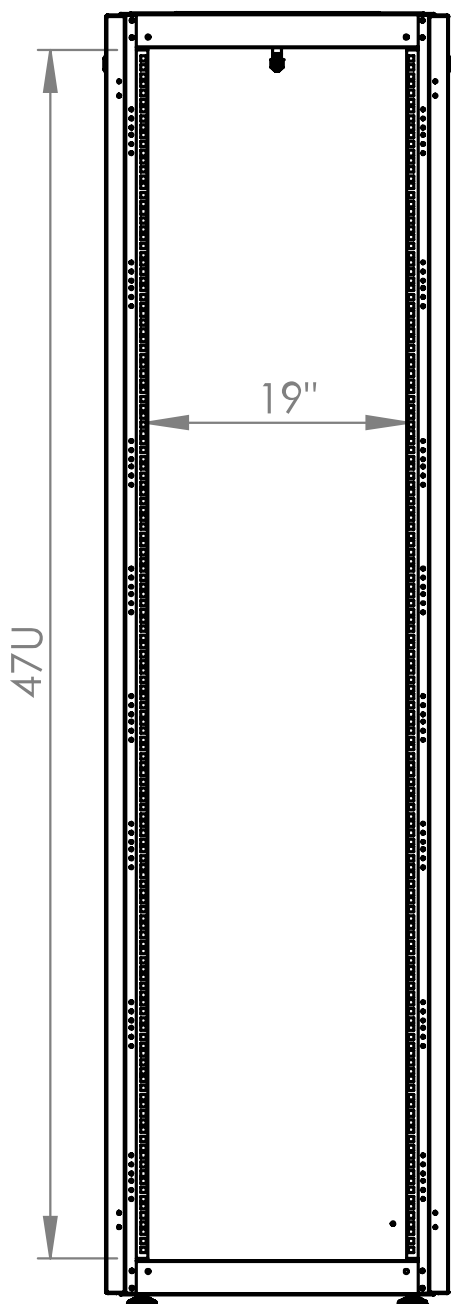
Front view



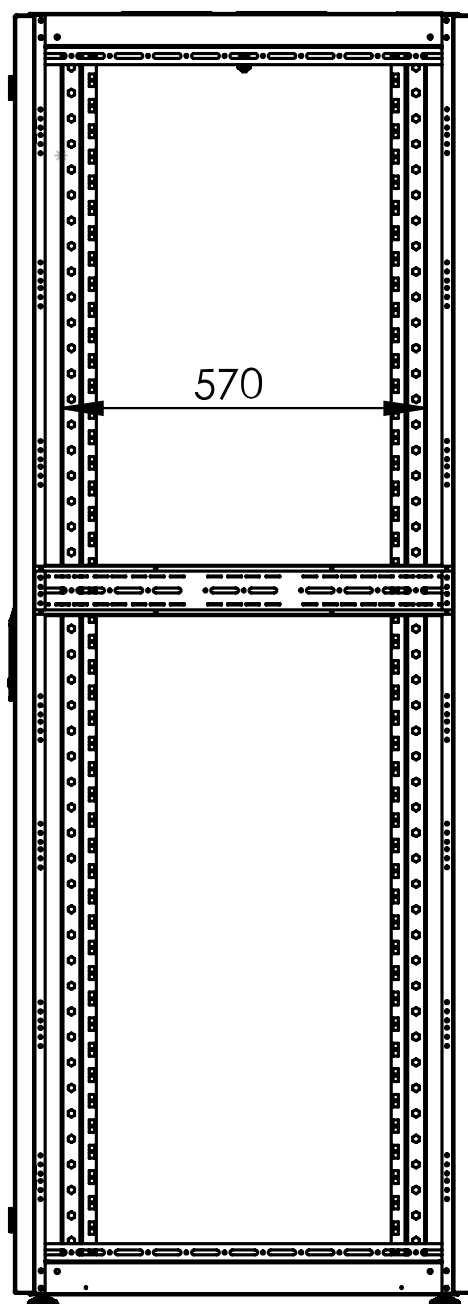
Side view



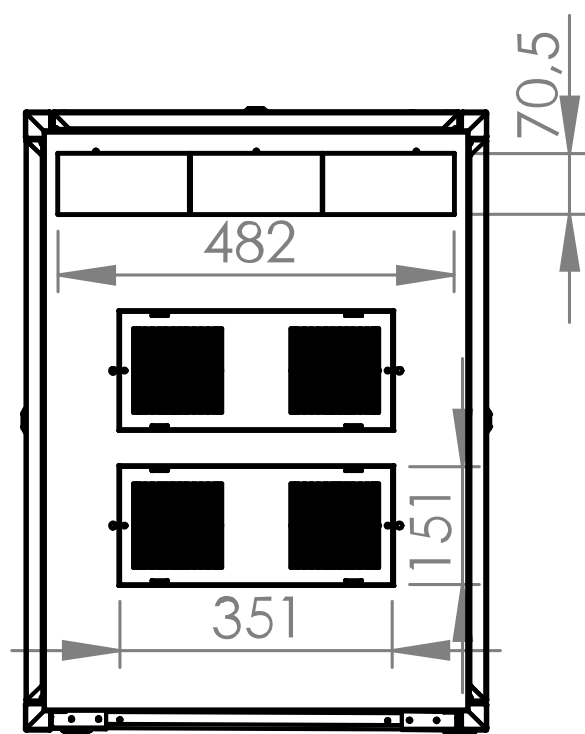
Rear view

Чертеж: Комуникационен шкаф стоящ S-RACK, W600 H2232 D800, 19" 47U

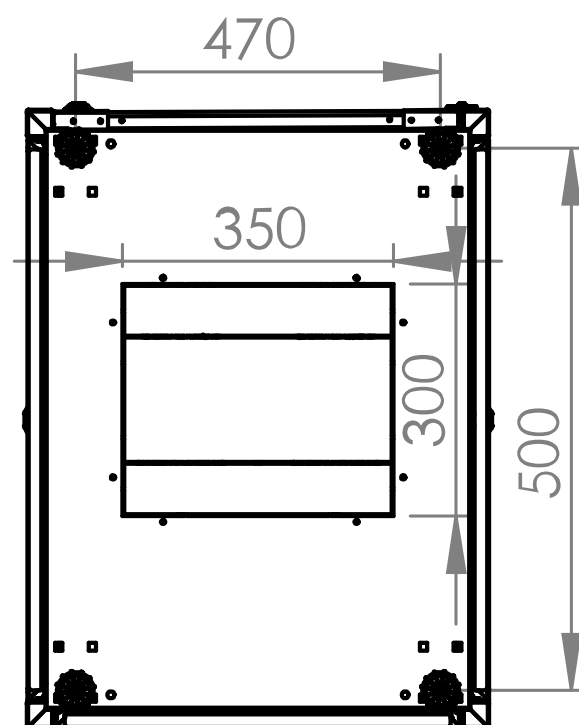
Front inside view



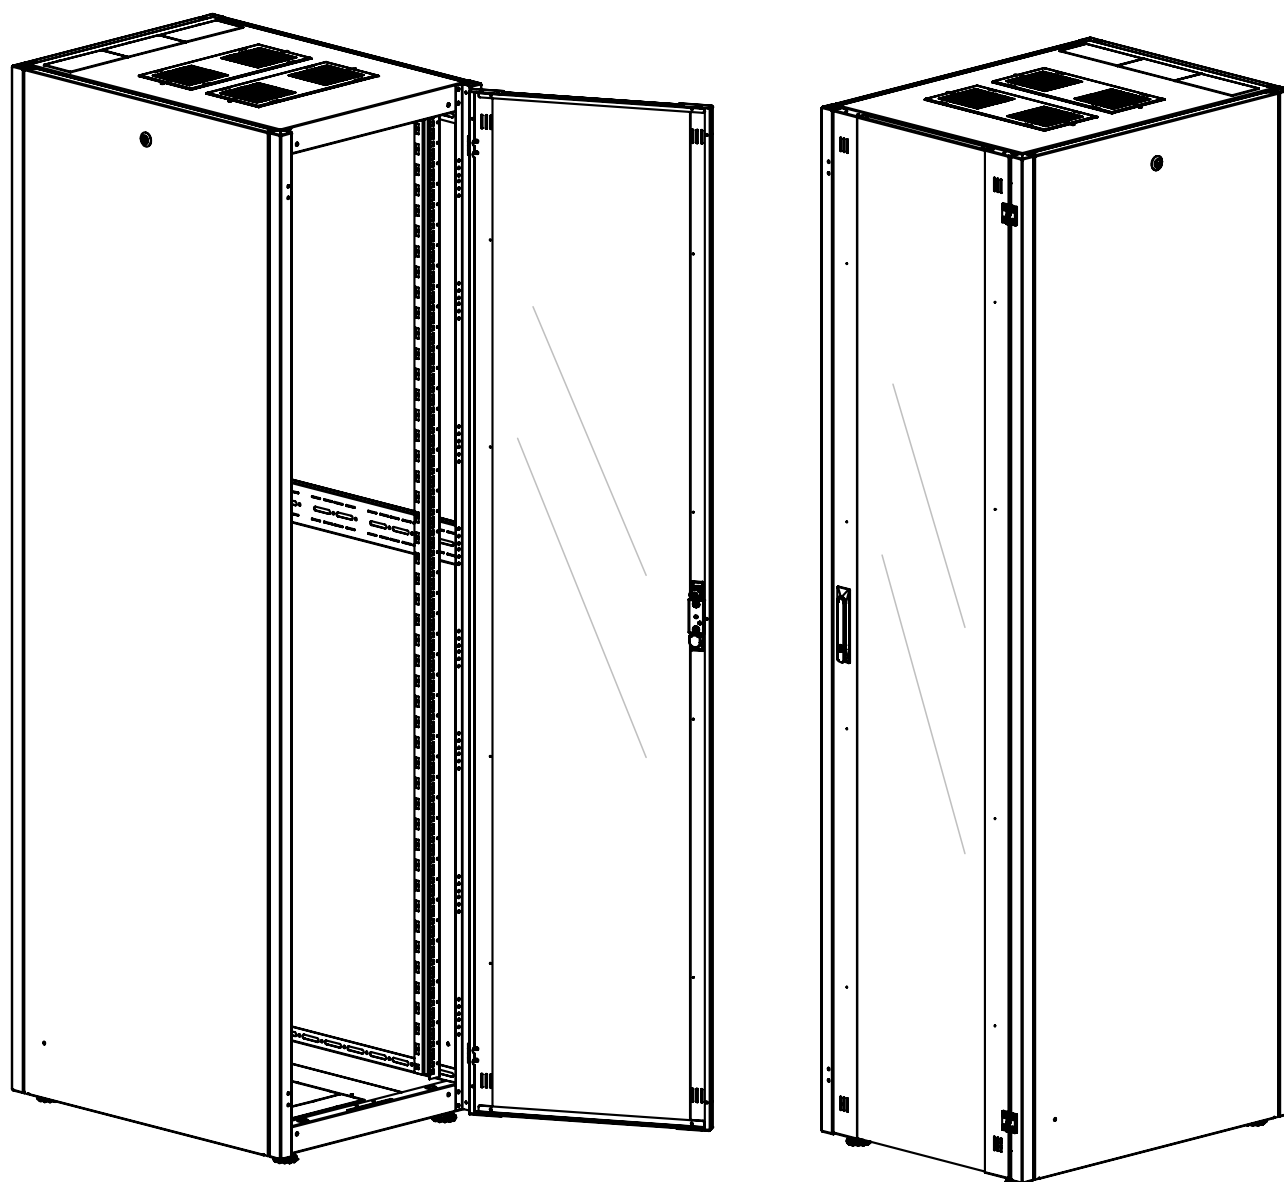
Side inside view

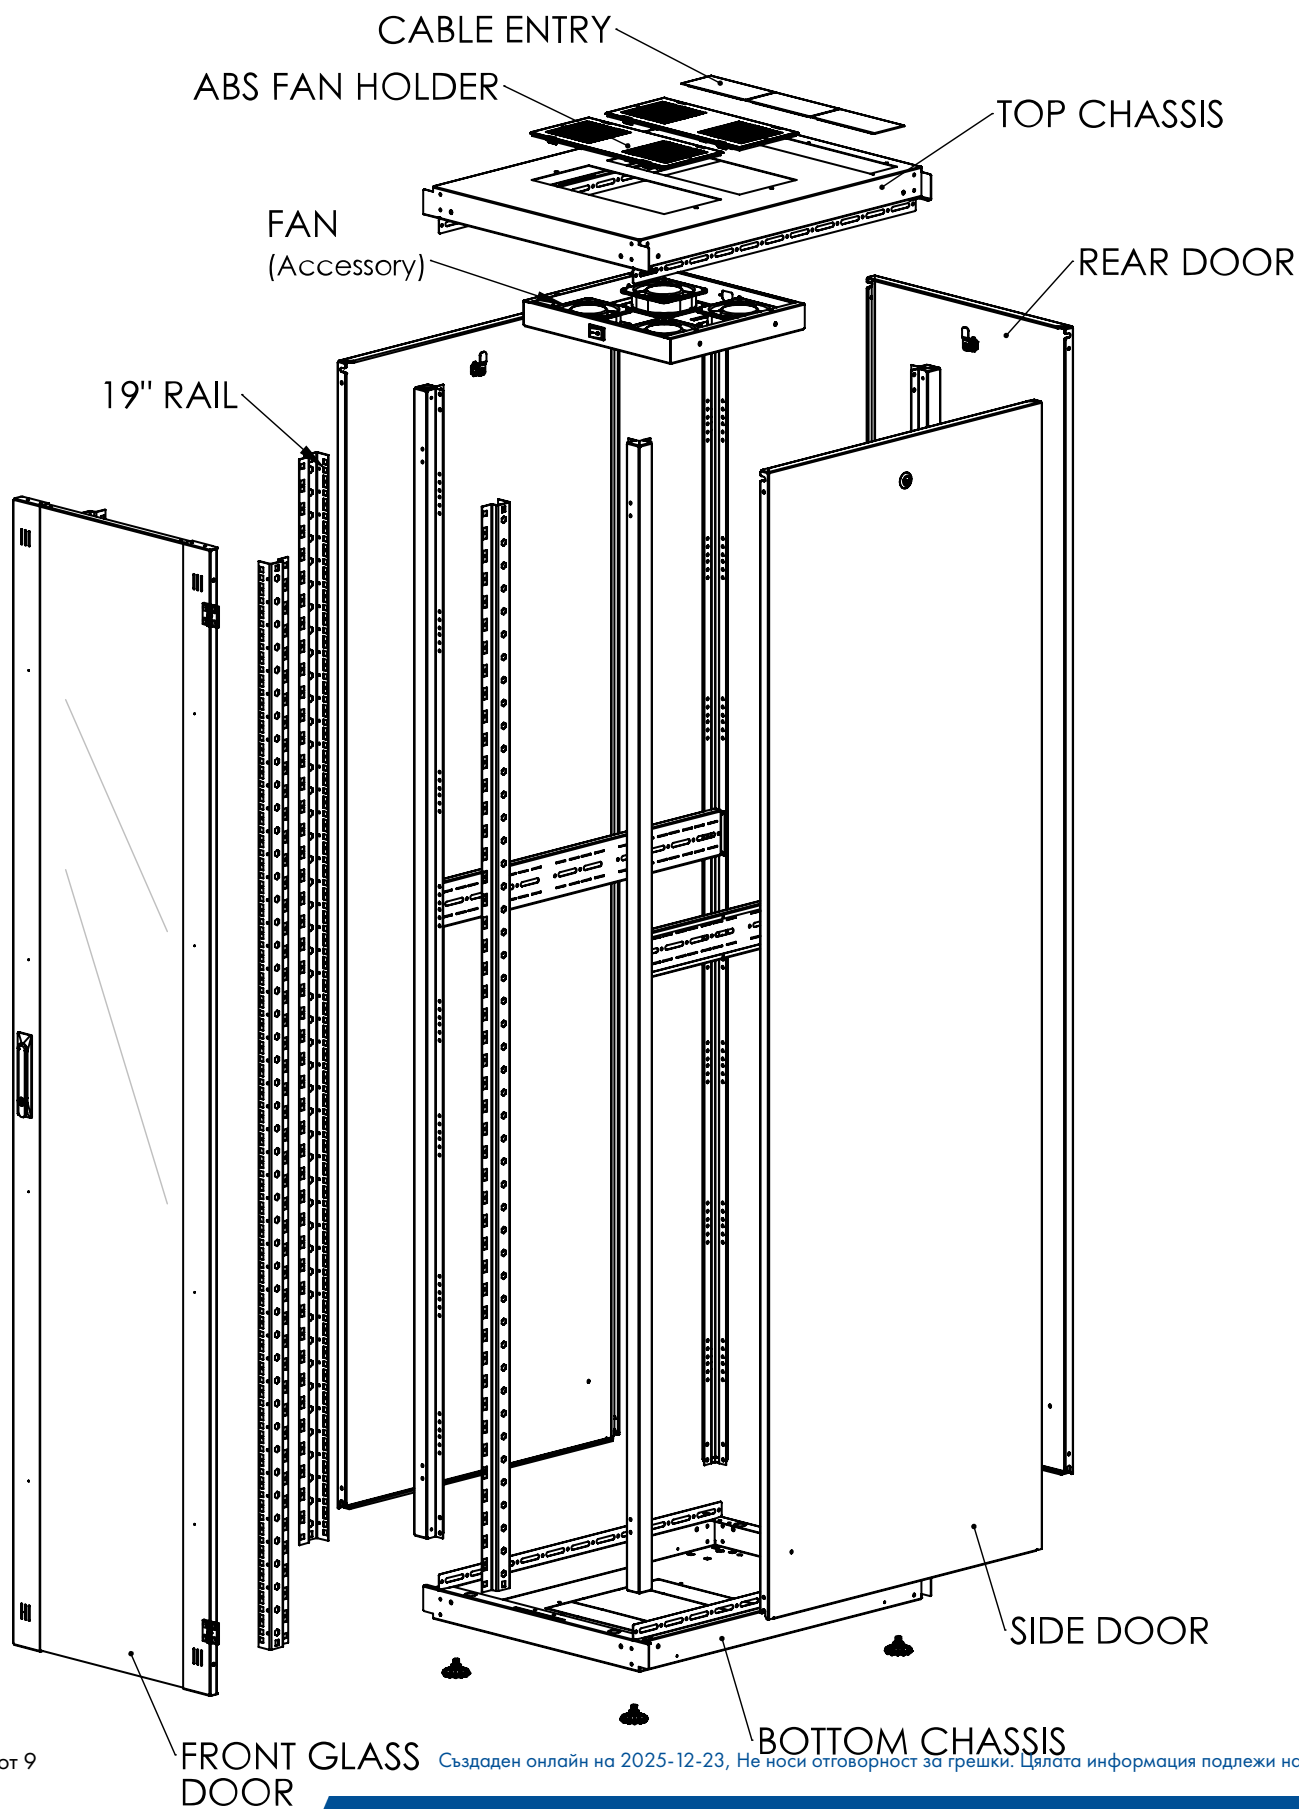
Чертеж: Комуникационен шкаф стоящ S-RACK, W600 H2232 D800, 19" 47U

Top view



Bottom view

Чертеж: Комуникационен шкаф стоящ S-RACK, W600 H2232 D800, 19" 47U

Чертеж: Комуникационен шкаф стоящ S-RACK, W600 H2232 D800, 19" 47U

стр. 7 от 9

Създаден онлайн на 2025-12-23, Не носи отговорност за грешки. Цялата информация подлежи на промяна.

Таблица с артикули

Описание	Артикулен No.
Комуникационен шкаф стоящ S-RACK, W600 H2232 D800, 19" 47U	DT476080
Акcesoари	
Цокъл H=100 за S-RACK табло W=600 D=800, RAL7035	DTOT106080
Вентилаторен модул за таван 2вент.Аналогов термостат,RAL7035	DTLTR02A
Светлосиво, за стоящи и стенни шкафове	
Вентилаторен модул за таван 4 вентилатора.Цифров термостат RAL7035 Светлосиво, монтаж от вътрешната страна	DTLTR04D
Вентилаторен модул за таван 4 вент.Аналогов термостат RAL7035 Светлосиво, монтаж от вътрешната страна	DTLTR04A
Четка за кабелен вход за таван/под S-RACK стоящ шкаф 70x316mm	DTZBRUSH02
Четка за кабелен вход за таван/под S-RACK стоящ шкаф 70x500mm	DTZBRUSH03
Комплект дръжка за патрон полуцилиндър S-RACK Стоящи шкафове	DTZLOCK02
Св. комплект за ком. табла DT, дълб. 800 и 1000mm, RAL5005 1 set = 2 covers (for top and bottom) + 8x screws 6.3 x 12	DTRA0800
19" Фиксирана тава, до 50kg товар, D=575mm, 1U, RAL7036 4 Point Fixing	DTFF1570
19" Фиксирана тава, 2U, до 50Kg товар, D=550mm, Нисък профил 4 точки на фиксиране, RAL7035	DTFL2550
19" Аранжиращ панел за кабели, 1U,5 метални пръстена,RAL7036	DTBC105R
К-т крепежни елементи за 19" М6, 50 винта, гайки и шайби	DTSRA050
Осветителен модул LED, магнит, 230VAC, със сензор за врата автоматична функция, при отваряне на вратата, външен PSU	DTLIGHT01
19" Комплект за заземяване, 1U, 10 точки 4 броя x 4 мм в диаметър x 40 см дълги жълти / зелени проводници, включително винтове и гайки	DTRE0001
Пач панел празен за 24 порта lightgrey, patchcord lock down	HSER0240GS
19" Алюминиев профил PDU, 9хшuko, 1U, 3m-кабел, RAL7035	IU070114-3
Разклонител за 19", 7 x Шuko с арестор, 1.25U, RAL7035 2m-connector cable, RAL7035	IU070113
19" Разклонител, 9хШuko, с ключ, 1U, 2m кабел, черно, ALU ALU Профил	Q7070114-A
19" Разклонител, 7хШuko, с ключ, 1U, защита от пренапрежение 2m-кабел, черен, ALU	Q7070113-A

Таблица с артикули

Описание	Артикулен No.
Акcesoари	
Switch 24xRJ45 10/100/1000, Silent, w/o fan, internal PSU	QLGSW2457
Metal-Chassis, 19"	