

Данни за артикула: DTWG046045

# Комуникационен шкаф стенов S-RACK, W=600 H=290 D=450, 19" 4U

RAL7035 Light grey, 19"-rails 2x in front



## SCHRACK-Info

Mainly used in offices and office-like environments, such as flats, single-family homes, etc. Suitable as a central distributor in small to medium-sized network installations, but also for use as a floor distributor (sub-distributor) in the horizontal area of structured cabling. The removable side panels allow convenient access to the installed components, even afterwards. For active cooling of the built-in components, optional DTLT fan units with one or two fans can be mounted in the roof


- **Material:** Powder-coated steel sheet housing
- **Material thickness:**
  - Top and bottom chassis: 0.6mm
  - Corner profile: 1.1mm
  - Rails: 1.4mm
  - Front door: 0.6mm
  - Rear panel: 0.5mm
  - Side panel: 0.5mm
- **Colors:**
  - RAL7035 Light grey
  - Strips: RAL5005 Signal blue
- **Height:** 4U
- **Width:** 600mm
- **Depth:** 450mm

- **Maximum load:** With even distribution: 80kg
- **Degree of protection:** IP20
- **Doors:** Glass door of safety glass 4mm including lock and 2 keys. Door hinged on the right. Conversion to left hinged possible. Opening angle of the door: approx. 230°.
- **Side panels:** Removable and lockable. The side panels are also fitted with a plastic dummy at the locking point of the barrel in the center. Optional accessory kit with 2 cylinders (O-shape/quarter-turn with cam lock) can be installed to provide more security.
- **Rails:** D= 450mm have 2x front 19" rails, galvanised, depth-adjustable, U marking present. A second pair of 19" DTWGPROFxx rails for rear mounting is available as an option. This is required for 4-point mounting of heavy installations.
- **Cable entry options:** In roof, floor and rear wall.
  - The floor, roof and rear panel are provided with a break-out blank cover.
- **Cooling:**
  - Passive cooling through ventilation slots and heat exchange with the outside area.
  - Active cooling by optional DTLT fans, which are easily and quickly inserted into the roof from the outside. This can also be easily done out afterwards.
- **Earthing:** Earthing set is included
- **Accessories:** Numerous accessories available (shelves, PDUs, cable management, blank panels, fan units, etc.)
- **Delivery:** Enclosure is completely assembled and delivered with assembly material


## Технически данни

|                               |                                         |
|-------------------------------|-----------------------------------------|
| Нето ширина (mm)              | 600,00                                  |
| Нето височина (mm)            | 290,00                                  |
| Дълбочина (mm)                | 450,00                                  |
| Нето тегло (kg)               | 9,80                                    |
| EAN                           | 9004840990805                           |
| Мин. околна температура (°C)  | 5                                       |
| Макс. околна температура (°C) | 40                                      |
| HU                            | 4                                       |
| Цвят                          | RAL 7035 / RAL 5005 (light grey / blue) |
| Степен на защита - IP         | IP20                                    |
| максимално натоварване (kg)   | 80                                      |
| Серия                         | S-RACK                                  |


**Чертеж: Комуникационен шкаф стенов S-RACK, W=600 H=290 D=450, 19" 4U**

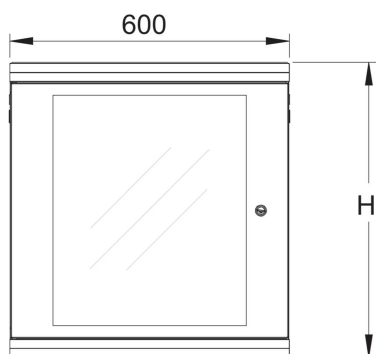


Front view

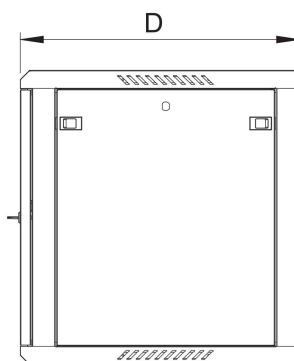


Side view




Bottom view




Top view

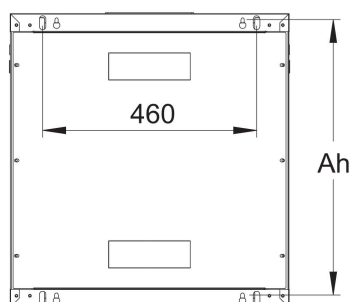


Rear view



Front inside view


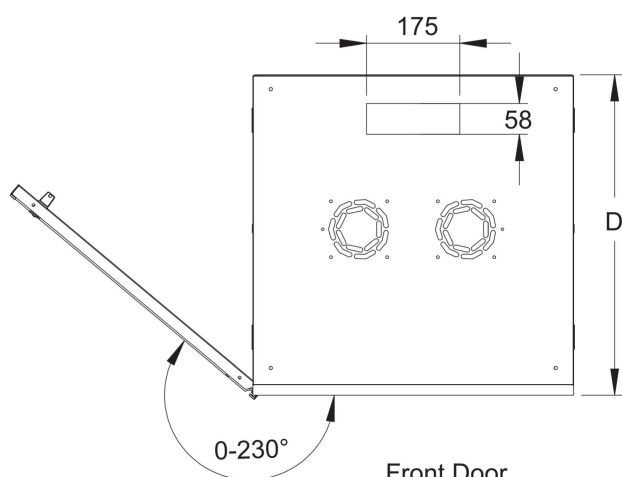


Front Door  
Opening Angle

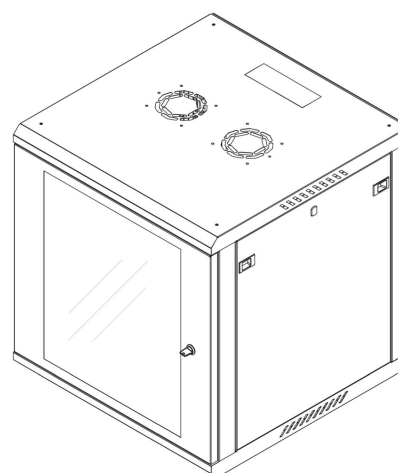

Isometric view


# Чертеж: Комуникационен шкаф стенов S-RACK, W=600 H=290 D=450, 19" 4U

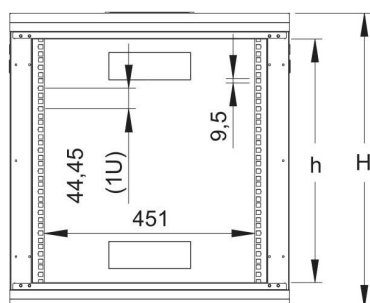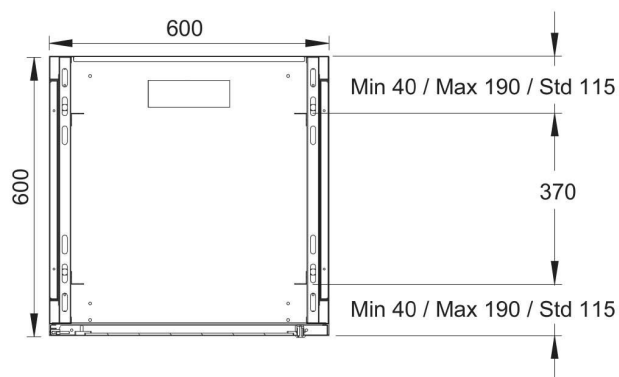

Dimensions in  
Width and Height

| U<br>Height | Size D  | h   | H   | Ah  |
|-------------|---------|-----|-----|-----|
| 4U          | 450/600 | 178 | 290 | 251 |
| 6U          | 450/600 | 267 | 379 | 340 |
| 9U          | 450/600 | 400 | 512 | 473 |
| 12U         | 450/600 | 533 | 645 | 606 |
| 15U         | 450/600 | 667 | 779 | 740 |
| 18U         | 450/600 | 800 | 912 | 873 |

## Чертеж: Комуникационен шкаф стенен S-RACK, W=600 H=290 D=450, 19" 4U

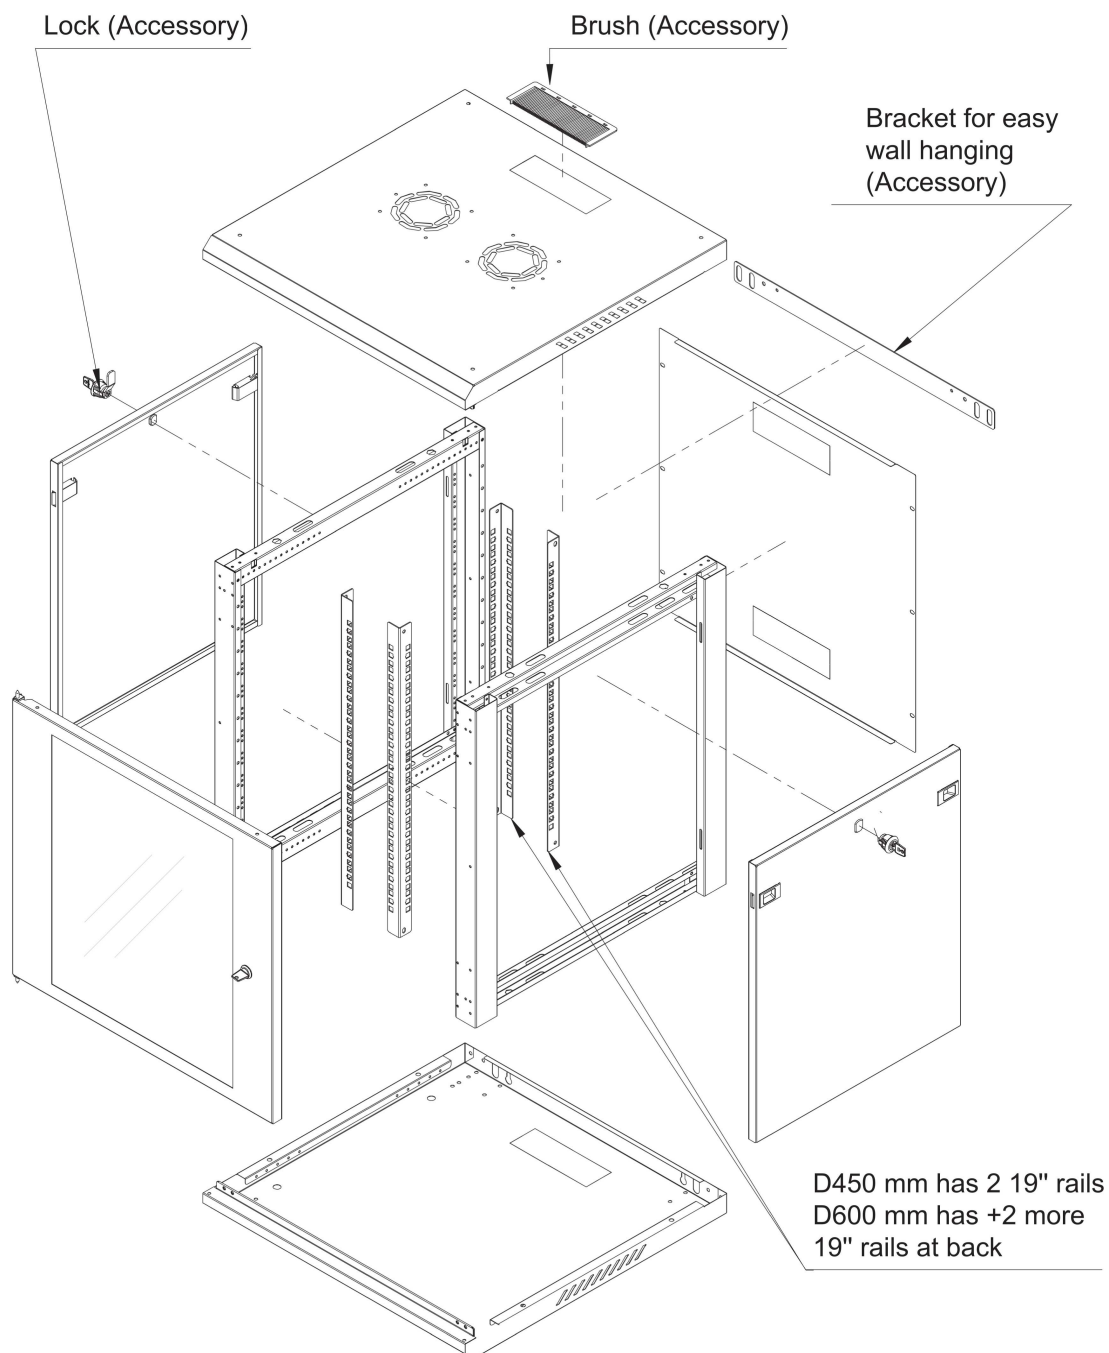

## Таблица с артикули

| Описание                                                                                                  | Артикулен No. |
|-----------------------------------------------------------------------------------------------------------|---------------|
| Комуникационен шкаф стенен S-RACK, W=600 H=290 D=450, 19" 4U<br>RAL7035 Light grey, 19"-rails 2x in front | DTWG046045    |
| <b>Акcesoари</b>                                                                                          |               |
| Вентилаторен модул за таван 2вент.Аналогов термостат,RAL7035<br>Светлосиво, за стоящи и стенни шкафове    | DTLTR02A      |
| Вентилаторен модул за таван 2вент.ключ (on/off),RAL7035<br>Светлосиво, за стоящи и стенни шкафове         | DTLTR02S      |
| Вентилаторен модул за таван-1вент.аналогов термостат,RAL7035<br>Светлосиво, за стоящи и стенни шкафове    | DTLTR01A      |
| Вентилаторен модул за таван 1вент. ключ(on/off), RAL7035<br>Светлосиво, за стоящи и стенни шкафове        | DTLTR01S      |
| 19" Комплект релси, 04U, S-RACK стенен монтаж DTWG<br>and DTWH, 1PU = 2 Pieces (left/right)               | DTWGPROF04    |
| 19" Фиксирана тава, 1U, до 30Kg товар, D=300mm, Нисък профил<br>2 точки на фиксиране, RAL7035             | DTFT1300      |
| Комплект колела 4бр. (2бр. със спирачка) за S-RACK - DTWG<br>DTWH, max. Load = 80kg                       | DTZR0006      |
| Заклучващ механизъм с ключ за S-RACK DTWG и DTWH<br>1 Set = 2pcs.                                         | DTZLOCK06     |
| Планка за стенен монтаж DTWG и DTWH-стенен монтаж<br>2x coated pressed-in nuts, RAL7035 Light grey        | DTZBRACK      |
| Четка за S-RACK 60x176mm<br>DTWG and DTWH, 60x176mm                                                       | DTZBRUSH04    |
| Пач панел празен за 24 порта<br>lightgrey, patchcord lock down                                            | HSER0240GS    |
| 19" Аранжиращ панел за кабели, 1U,5 метални пръстена,RAL7036                                              | DTBC105R      |
| К-т крепежни елементи за 19" M6, 20 винта, гайки и шайби                                                  | DTSRA020      |
| Switch 24xRJ45 10/100/1000, Silent, w/o fan, internal PSU<br>Metal-Chassis, 19"                           | QLGSW2457     |
| 19" Разклонител за 9xШуко, 1U, RAL7035                                                                    | IU070114      |
| Разклонител за 19", 7 x Шуко с арестор, 1.25U, RAL7035<br>2m-connector cable, RAL7035                     | IU070113      |
| 19" Разклонител, 9xШуко, с ключ, 1U, 2м кабел, черно, ALU<br>ALU Профил                                   | Q7070114-A    |
| 19" Разклонител, 7xШуко, с ключ, 1U, защита от пренапрежение<br>2м-кабел, черен, ALU                      | Q7070113-A    |