

Данни за артикула: DTWH156045

Комуникационен шкаф стенов S-RACK, W=600 H=779 D=450, 19", 15U

RAL9005 Black, 19"-rails 2x in front



SCHRACK-Info

Mainly used in offices and office-like environments, such as flats, single-family homes, etc. Suitable as a central distributor in small to medium-sized network installations, but also for use as a floor distributor (sub-distributor) in the horizontal area of structured cabling. The removable side panels allow convenient access to the installed components, even afterwards. For active cooling of the built-in components, optional DTLT fan units with one or two fans can be mounted in the roof


- **Material:** Powder-coated steel sheet housing
- **Material thickness:**
 - Top and bottom chassis: 0.6mm
 - Corner profile: 1.1mm
 - Rails: 1.4mm
 - Front door: 0.6mm
 - Rear panel: 0.5mm
 - Side panel: 0.5mm
- **Colors:**
 - RAL9005 Black
 - Strips: RAL5005 Signal blue
- **Height:** 15U
- **Width:** 600mm
- **Depth:** 450mm

- **Maximum load:** With even distribution: 80kg
- **Degree of protection:** IP20
- **Doors:** Glass door of safety glass 4mm including lock and 2 keys. Door hinged on the right. Conversion to left hinged possible. Opening angle of the door: approx. 230°.
- **Side panels:** Removable and lockable. The side panels are also fitted with a plastic dummy at the locking point of the barrel in the center. Optional accessory kit with 2 cylinders (O-shape/quarter-turn with cam lock) can be installed to provide more security.
- **Rails:** D= 450mm have 2x front 19" rails, galvanised, depth-adjustable, U marking present. A second pair of 19" DTWGPROFxx rails for rear mounting is available as an option. This is required for 4-point mounting of heavy installations.
- **Cable entry options:** In roof, floor and rear wall.
 - The floor, roof and rear panel are provided with a break-out blank cover.
- **Cooling:**
 - Passive cooling through ventilation slots and heat exchange with the outside area.
 - Active cooling by optional DTLT fans, which are easily and quickly inserted into the roof from the outside. This can also be easily done out afterwards.
- **Earthing:** Earthing set is included
- **Accessories:** Numerous accessories available (shelves, PDUs, cable management, blank panels, fan units, etc.)
- **Delivery:** Enclosure is completely assembled and delivered with assembly material


Технически данни

Нето ширина (mm)	600,00
Нето височина (mm)	779,00
Дълбочина (mm)	450,00
Нето тегло (kg)	18,00
EAN	9004840990973
Мин. околна температура (°C)	5
Макс. околна температура (°C)	40
HU	15
Цвят	RAL 9005 (black)
Степен на защита - IP	IP20
максимално натоварване (kg)	80
Серия	S-RACK


**Чертеж: Комуникационен шкаф стенов S-RACK, W=600 H=779
D=450, 19", 15U**

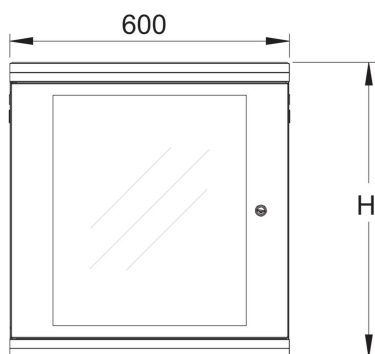


Front view

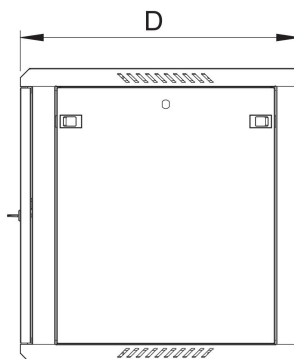


Side view




Bottom view




Top view

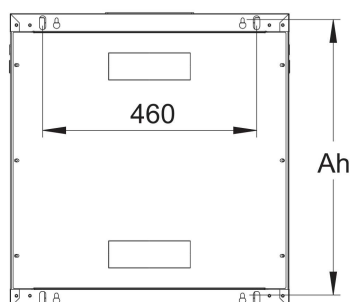


Rear view



Front inside view



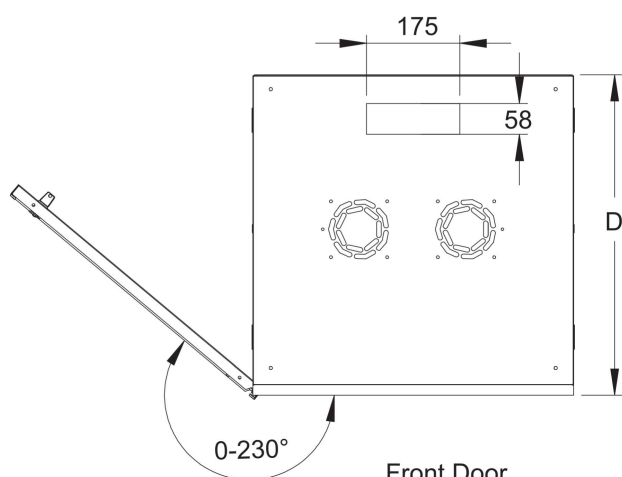


Front Door
Opening Angle

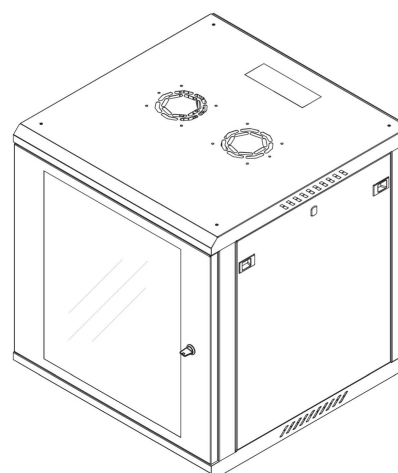

Isometric view

Чертеж: Комуникационен шкаф стенен S-RACK, W=600 H=779 D=450, 19", 15U

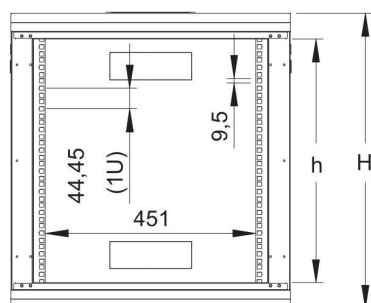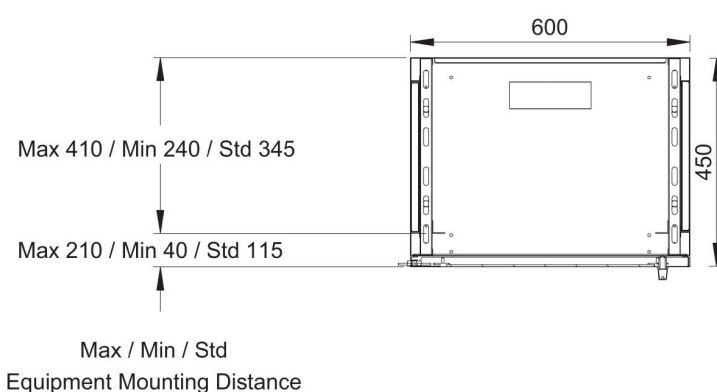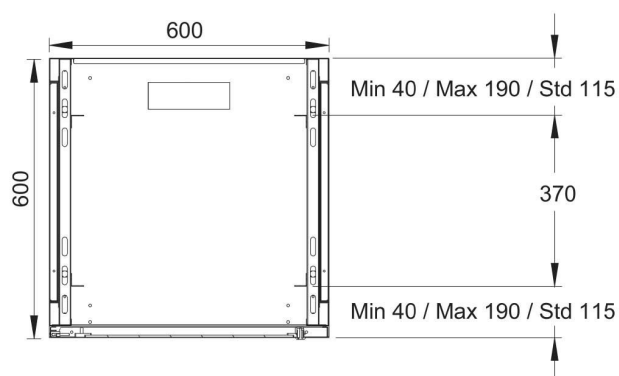

Dimensions in
Width and Height

U Height	Size D	h	H	Ah
4U	450/600	178	290	251
6U	450/600	267	379	340
9U	450/600	400	512	473
12U	450/600	533	645	606
15U	450/600	667	779	740
18U	450/600	800	912	873

Чертеж: Комуникационен шкаф стенов S-RACK, W=600 H=779 D=450, 19", 15U

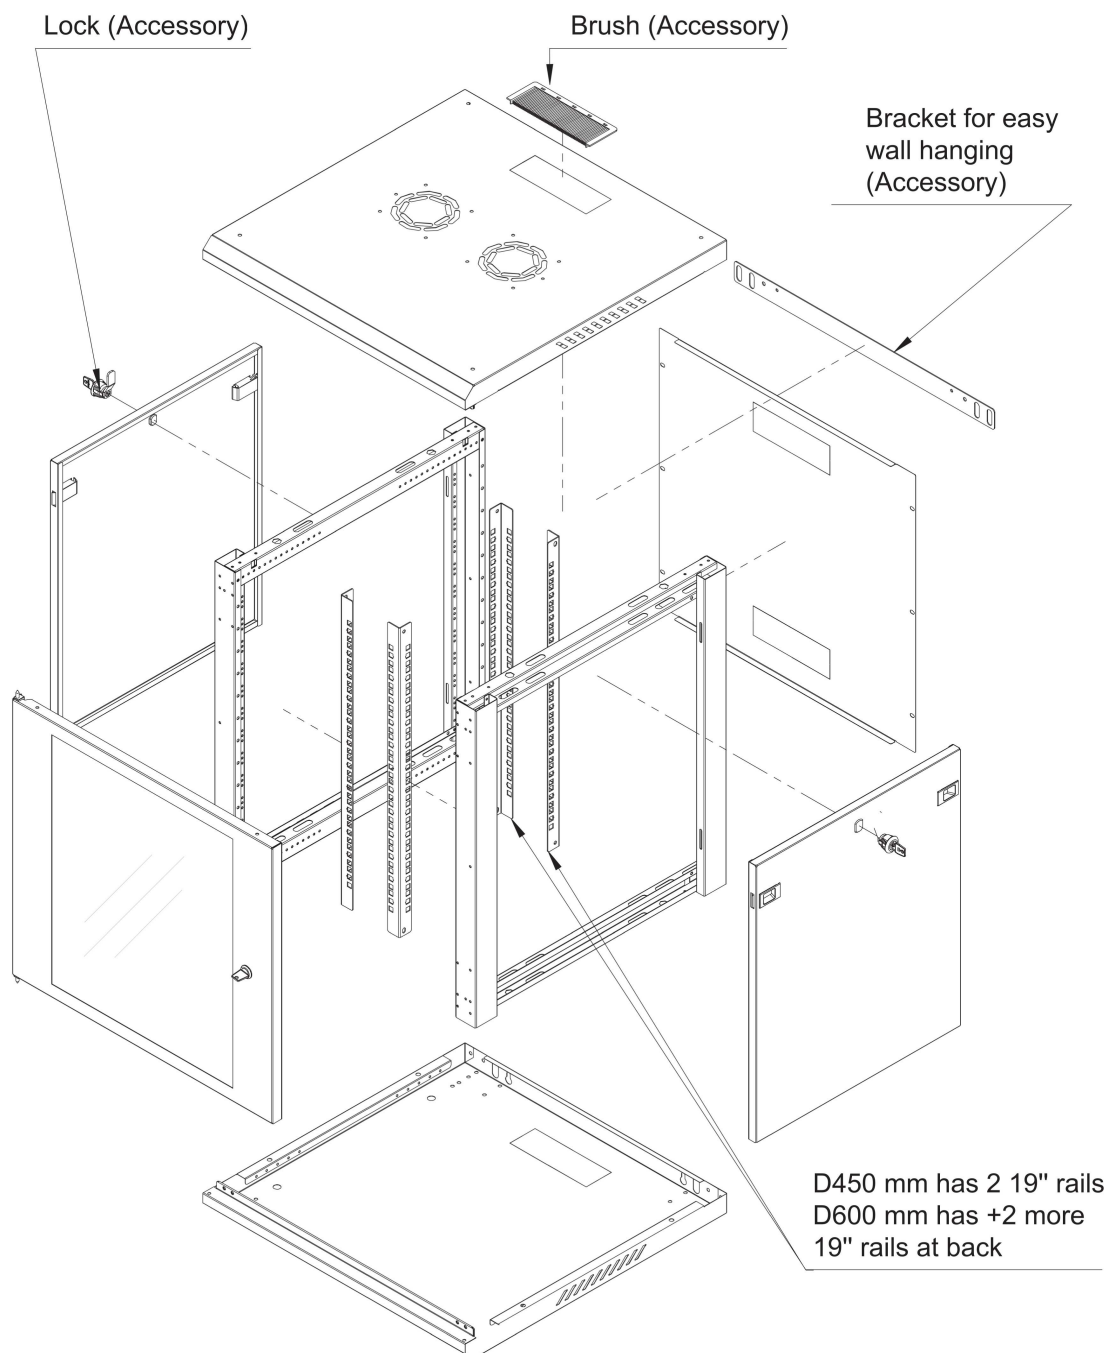


Таблица с артикули

Описание	Артикулен No.
Комуникационен шкаф стенов S-RACK, W=600 H=779 D=450, 19", 15U RAL9005 Black, 19"-rails 2x in front	DTWH156045
Аксессуары	
Таванен вент. модул 2 вент. за S-RACK, с аналогов термостат Installation from outside of enclosure, for freestanding and wallmount enclosures	DTLRO2A-B
Таванен вент. модул 1 вент. за S-RACK, с аналогов термостат Installation from outside of enclosure, for freestanding and wallmount enclosures	DTLRO1A-B
19" Комплект релси, 15U, S-RACK стенов монтаж DTWG and DTWH, 1PU = 2 Pieces (left/right)	DTWGPROF15
19" Фиксирана тава, 1U, до 30kg товар, D=300mm, отворена 2 Point Fixing, RAL9005	DTFT1300-B
Комплект колела 4бр. (26р. със спирачка) за S-RACK - DTWG DTWH, max. Load = 80kg	DTZR0006
Заклучващ механизъм с ключ за S-RACK DTWG и DTWH 1 Set = 2pcs.	DTZLOCK06
Планка за стенов монтаж DTWG и DTWH-стенов монтаж 2x coated pressed-in nuts, RAL9005 Black	DTZBRACK-B
Четка за S-RACK 60x176mm DTWG and DTWH, 60x176mm	DTZBRUSH04
Пач панел 19" празен, 24 модула (SFA)(SFB), 1U, черен ECO черно, единично закрепване, фиксиране на пач кабелите	HSER0240SP
19" Аранжиращ панел, 1U, 5 метални пръстена, 63mm, RAL9005	DTBC105R-B
К-т крепежни елементи за 19" М6, 20 винта, гайки и шайби	DTSRA020
Switch 24xRJ45 10/100/1000, Silent, w/o fan, internal PSU Metal-Chassis, 19"	QLGSW2457
19" Разклонител за 9xШуко, 1U, RAL7035	IU070114
Разклонител за 19", 7 x Шуко с арестор, 1.25U, RAL7035 2m-connector cable, RAL7035	IU070113
19" Разклонител, 9xШуко, с ключ, 1U, 2м кабел, черно, ALU ALU Профил	Q7070114-A
19" Разклонител, 7xШуко, с ключ, 1U, защита от пренапрежение 2м-кабел, черен, ALU	Q7070113-A