

Данни за артикула: DTWI126042

Комуник. табло, стенен монт., IP55 Indoor, W600 H663 D450, 12U

RAL7035 сив, Стъклена врата



SCHRACK-Info

Network wallmount 19" IP55 Indoor Cabinets are designed for industrial applications. Based on EN60529 provides IP55 protection class against dust and water ingress.

The enclosure provides IP55 protection against dust and water.

After installation of fans or filters, IP54 is still met.

Application areas are semi-open areas like factories, warehouses, lean-to roof conditions, without no direct rain and environmental effects. Totally gasketed doors, IP55 performing swing handle locking with 3 point locking system and isolated cable entries provide best performance for water and dust ingress.

1,5 mm thick material monoblock welded construction, with epoxy polyester type powder coating which is RAL7035 Light Grey color, provides the corrosion resistance.

Passive ventilation via filtered inlets.

TECHNICAL DATA

- Colour: RAL7035 Light Grey
- Front door opening angle is up to 140 degrees. Front door has an infused sealing gasket structure which provides excellent IP protection even under cold/hot weather conditions. The front door is grounded to the main body with yellow/green 4,0 mm diameter copper wire.
- Height: 12U
- Width: 600mm


- Depth: 450mm
- Maximum Load: 100kg
- Door: Metal door including keyed swing lock handle with 3point locking system provides security and anti-vandal structure, also maintaining the IP55 protection
- Included are 4 pcs. 3,0 mm thick wall mounts with matching washer and screws, as well as a cable entry flange with three glands: 2x PG21, 1 x PG48, 2 x PVC blind caps with 28mm diameter (installed in the floor) and a blind flange (accessory pack).
- Filters are included
- Cabinets are delivered with: 1 set = 2pcs 19" front rails. A second pair of 19" DTWIPROFxx rails for rear mounting is available as an option. This is required for 4-point mounting of heavy equipment.




Технически данни

Нето ширина (mm)	600,00
Нето височина (mm)	663,00
Дълбочина (mm)	450,00
Нето тегло (kg)	31,00
Мин. околна температура (°C)	5
Макс. околна температура (°C)	40
Suitable for enclosure width (mm)	600
Височина (mm)	663
Цвят	RAL 7035 (Light grey)
Основно описание	Табло


Чертеж: Комуник. табло, стенен монт., IP55 Indoor, W600 H663 D450, 12U



Top view

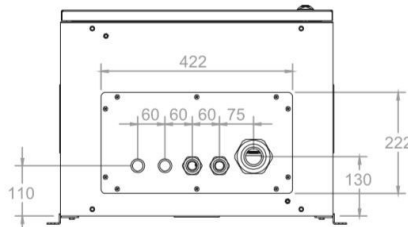



Bottom view

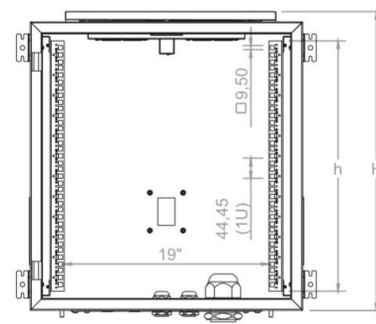


Inside view

Чертеж: Комуник. табло, степен монт., IP55 Indoor, W600 H663 D450, 12U

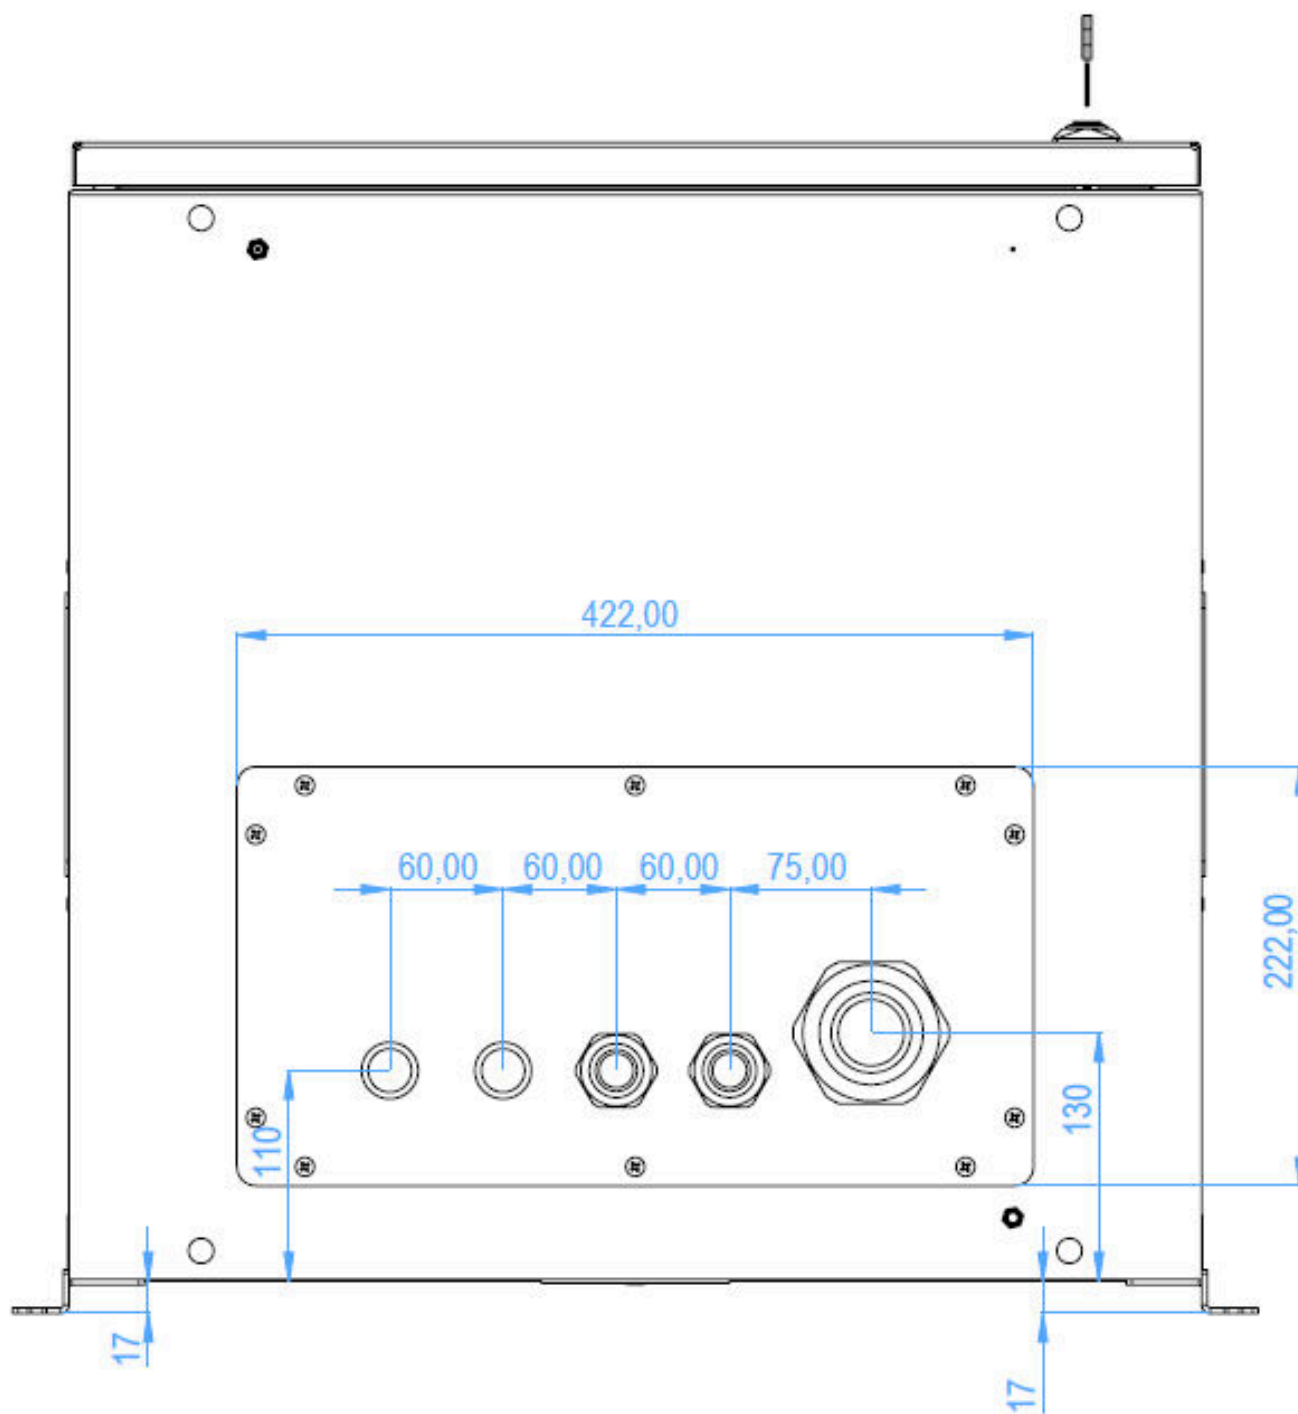


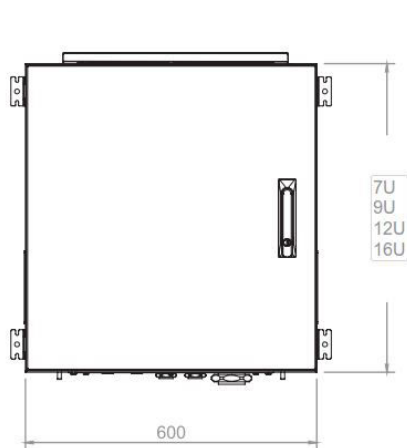Чертеж: Комуник. табло, степен монт., IP55 Indoor, W600 H663 D450, 12U

Front view




Side view

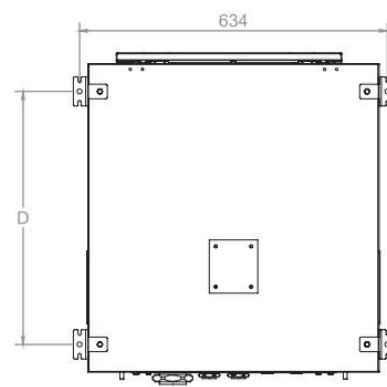


Rear view

Чертеж: Комуник. табло, степен монт., IP55 Indoor, W600 H663 D450, 12U

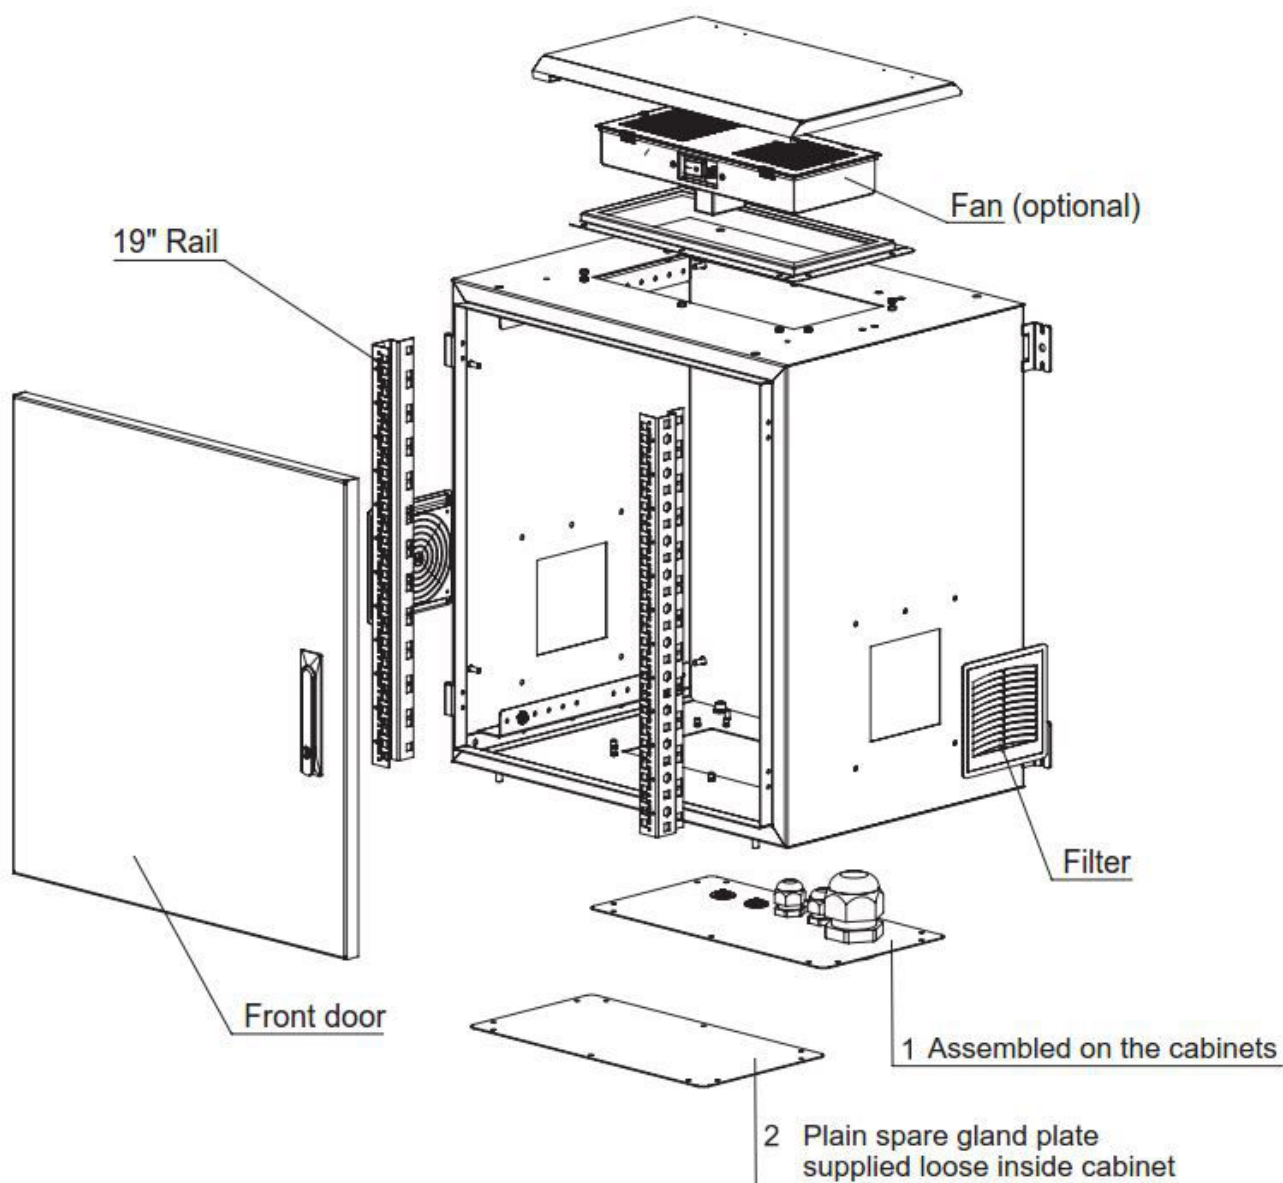

Чертеж: Комуник. табло, степен монт., IP55 Indoor, W600 H663 D450, 12U

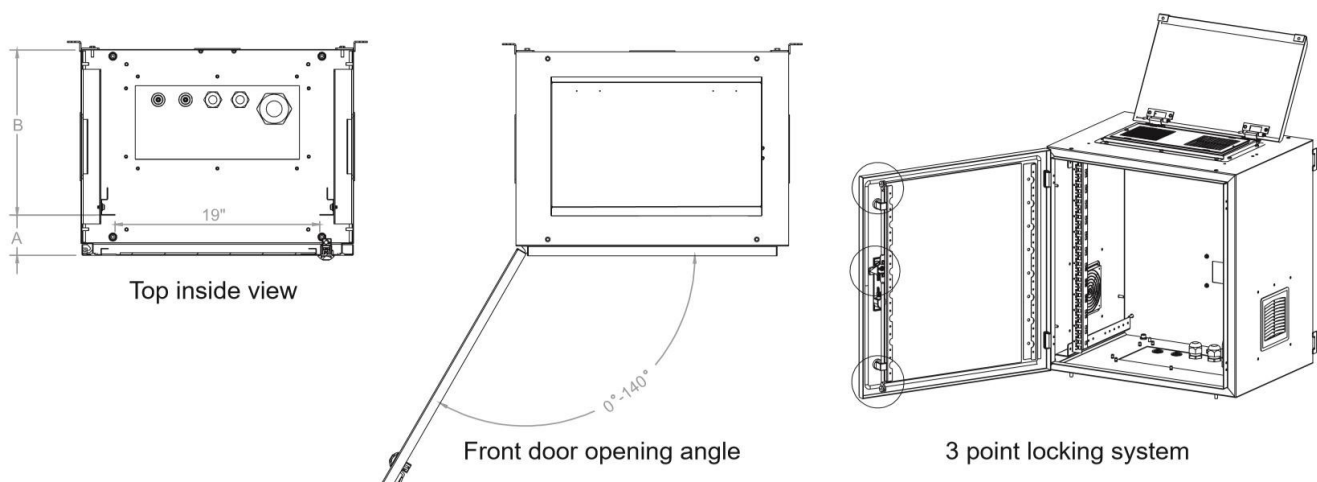

Чертеж: Комуник. табло, степен монт., IP55 Indoor, W600 H663 D450, 12U

	A		B	
	Min	Max	Min	Max
D=450	60 mm	185 mm	260 mm	385 mm
D=600	60 mm	335 mm	260 mm	535 mm

Таблични файлове: Комуник. табло, степен монт., IP55 Indoor, W600 H663 D450, 12U

Тип	h [mm]	H [mm]	Gewicht Netto [kg]	Gewicht Brutto [kg]
DTWI076040	311	440	27	28
DTWI096040	400	529	30,5	31,5
DTWI126040	533	663	33,5	34,5
DTWI166040	711	841	37,2	38,2
DTWI076042	311	440	25	26
DTWI096042	400	529	28	29
DTWI126042	533	663	31	32
DTWI166042	711	841	37	38

Таблица с артикули

Описание	Артикулен No.
Комуник. табло, стенен монт., IP55 Indoor, W600 H663 D450, 12U RAL7035 сив, Стъклена врата	DTWI126042
Аксессуары	
Таванен вент. модул IP54, 1 вент., ключ (on/off), за DTWI wallmount enclosures IP55, Lightgrey, Installation from outside of enclosure	DTLTR5521
Таванен вент. модул IP54, 2 вент., ключ (on/off), за DTWI wallmount enclosures IP55, Lightgrey, Installation from outside of enclosure	DTLTR5522
19" Комплект релси, 12U f. S-RACK стенен монтаж 1PU = 2 Pieces	DTWIPROF12
Комплект дръжка за патрон полуцилиндър S-RACK Стоящи шкафове	DTZLOCK02
Swing handle adapter kit for half cylinder for DTWI (additional DTZLOCK02- necessary)	DTZLOCK05
Switch 24xRJ45 10/100/1000, Silent, w/o fan, internal PSU Metal-Chassis, 19"	QLGSW2457
19" Разклонител за 9xШуко, 1U, RAL7035	IU070114
Разклонител за 19", 7 x Шуко с арестор, 1.25U, RAL7035 2m-connector cable, RAL7035	IU070113
19" Разклонител, 9xШуко, с ключ, 1U, 2m кабел, черно, ALU ALU Профил	Q7070114-A
19" Разклонител, 7xШуко, с ключ, 1U, защита от пренапрежение 2m-кабел, черен, ALU	Q7070113-A