

Данни за артикула: HLP23LL00F

FO Пач кабел Duplex LC/UPC - LC/UPC, 50/125µm OM3, LSOH

LSOH, aqua



SCHRACK-Info

Multimode patch cords are mainly used for short-distance communication with high transmission rates, for example within a building or on a campus. The multimode patch cords are equipped with an LSOH-jacket. These comply with IEC or EIA-TIA standards. These multimode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- LC/UPC - LC/UPC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Multimode cabled fiber conforms to ITU-T G.651.1, IEC 60793-2-10
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS

- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks


- ATM, SONET and WDM



Технически данни

Стандарт на продукта	IEC 61300-3-4 / IEC 61300-3-6
Connector standard	IEC 61754
комбинация от щекери	LC/LC
Дължина на Пач кабел (m)	0,50
Оптика	50/125 OM3 Multimode
Външна изолация на кабела	LS0H
Цвят	тюркоаз
Insertion loss typical (dB)	$\leq 0,25$
Return loss typical (dB)	≥ 30
Мин. околна температура (°C)	-20
Макс. околна температура (°C)	60
Нето ширина (mm)	150,00
Нето височина (mm)	200,00
Нето тегло (kg)	0,04

Чертеж: FO Пач кабел Duplex LC/UPC - LC/UPC, 50/125µm OM3, LS0H

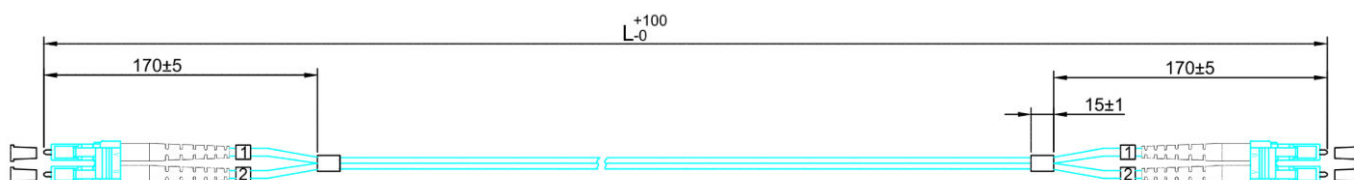

Описание	Артикулен No.
FO Пач кабел Duplex LC/UPC - LC/UPC, 50/125µm OM3, LS0H LS0H, aqua	HLP23LL00F