


Данни за артикула: HLP29LM03F

FO Пач кабел Duplex LC/UPC - LC/APC, 9/125µm OS2, 3.0m

LSOH, yellow

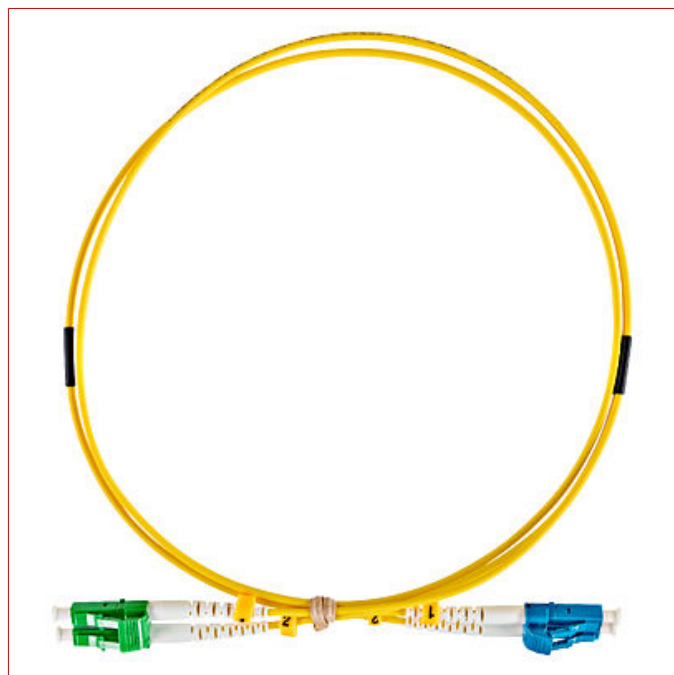

SCHRACK-Info

Single mode patch cords are used for telecom networks and also used for high speed metropolitan and access network. The single-mode patch cables are equipped with an LSOH jacket. These comply with IEC or EIA-TIA standards. These singlemode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- LC/UPC - LC/APC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Singlemode cabled fiber conforms to ITU-T G.657.A2, IEC 60793-2-50
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS


- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks

- ATM, SONET and WDM

Технически данни

Стандарт на продукта	IEC 61300-3-4 / IEC 61300-3-6
Connector standard	IEC 61754
комбинация от щекери	LC UPC/LC APC
Дължина на Пач кабел (m)	3,0
Оптика	9/125 OS2 Singlemode
Външна изолация на кабела	LSOH
Цвят	Жълто
Диаметър, mm (mm)	2 x 2,2
Insertion loss typical (dB)	$\leq 0,25$
Return loss typical (dB)	APC ≥ 60 / UPC ≥ 50
Мин. околна температура (°C)	-20
Макс. околна температура (°C)	60
Нето ширина (mm)	200,00
Нето височина (mm)	300,00
Нето тегло (kg)	0,11

Чертеж: FO Пач кабел Duplex LC/UPC - LC/APC, 9/125µm OS2, 3.0m

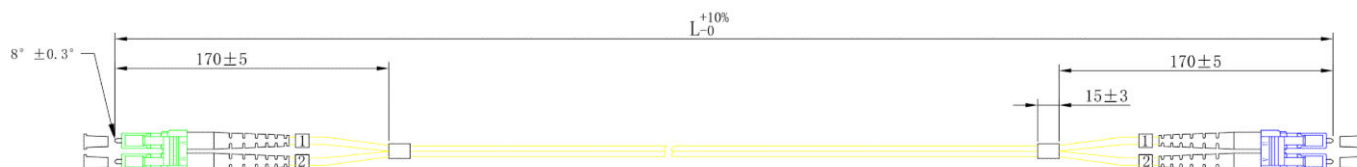

Описание	Артикулен No.
FO Пач кабел Duplex LC/UPC - LC/APC, 9/125µm OS2, 3.0m LSOH, yellow	HLP29LM03F