


Данни за артикула: HSEKU423H1

U/UTP Кабел Cat.6, 4x2xAWG23/1, 300MHz, LSOH, син

Sale per meter

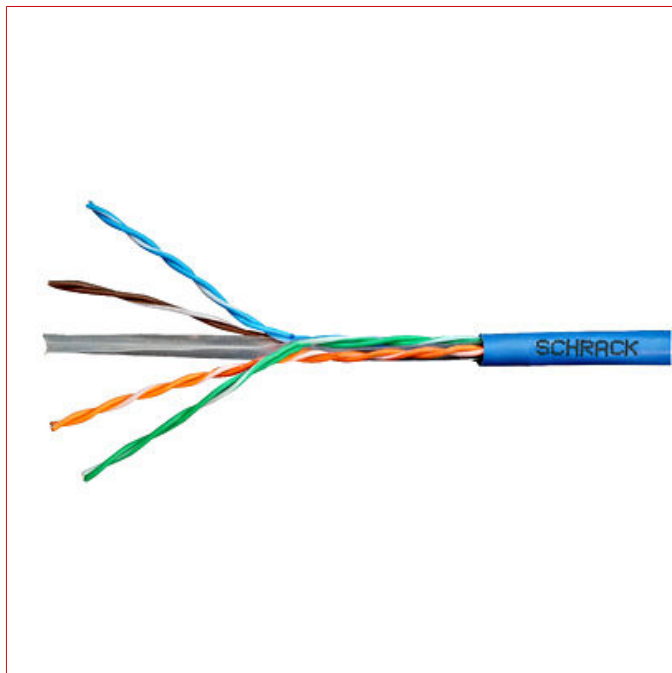

SCHRACK-Info

APPLICATION

- Horizontal and building backbone cable
- Support current and future Category 6 and 5e applications, such as: 1000Base-T (Gigabit Ethernet), 100 Base-T, 10 Base-T, FDDI, ATM

GENERAL STANDARDS

- International Standard: ISO/IEC 11801 2nd edition (2002) and ISO/IEC 11801 amendment 1 (2010)
- European Standard: EN 50173-1 (2002) and EN 50173-1 Amd.1 (2009)
- U.S. Standard: ANSI/TIA/EIA 568-B.2.1 (2002)



Технически данни

Категория	Cat.6
Конструкция на кабела	U/UTP
Conductor material	Solid bare copper AWG23/1 (0.58mm)

Технически данни - продължение

Conductor	4 unshielded pairs
Color code pairs	Pair 1 White / Blue Pair 2 White / Orange Pair 3 White / Green Pair 4 White / Brown
Изоляционен материал	Polyethylene (PE)
Nominal diameter over insulation (mm)	0,96
Екранировка	Неширмован
Външна изолация на кабела	LS0H
Euroclass, съгласно EN50575	Eca
Sheath colour	blue, RAL 5015
Burning load (kJ/m)	460
Cross web	Polyethylene (PE)
Fire performance according IEC 60332-1	Yes
Плътност на дима - пропускливост (%)	≥80
Amount of halogen acid gas - pH	≥4,3
Amount of halogen acid gas - Conductivity (μS/m)	≤10
Външен диаметър (mm)	5,7 ± 0,3
Weight nominal (kg/km)	37
Цвят	Синьо
Температурен обхват - работен (°C)	-30 to +60
Температурен обхват - при инсталиране (°C)	+0 to +50
Bending radii cable - Static (Ø)	4
Bending radii cable - Dynamic (Ø)	8
Max. pulling tension (N)	80
Номинално напрежение	≤72V DC and ≤50V AC
DC устойчивост при 20° C (Ohm/100m)	≤9,5
Дисбаланс на съпротивлението: в двойка/между двойки (%)	≤2 / ≤4
D.C. insulation resistance: conductor – conductor and conductor – screen (MΩ*km)	≥ 5000
Dielectric strength conductor – conductor (2 sec) (kV DC)	2,5
Вместимост (nF/km)	≤56
Capacitance unbalance pair to ground (pF/km)	≤1600
Coupling attenuation according IEC 61156-5	Type 3
Elongation at break of the conductors (%)	10
Minimum elongation at break of the insulation (%)	≥ 100
Minimum elongation at break of the sheath (%)	≥ 100
Якост на опън (MPa)	≤9
Maximum continuous current per conductor (@ 25°C) (A)	1,5
SKEW (ns/100m)	≤40
NVP (%)	70
IEEE Compliance	PoE: IEEE 802.3bt Type 1, Type 2, Type 3, Type 4
Нето дължина (mm)	1.000,00

Технически данни - продължение

Нето диаметър (mm)	5,70
Нето тегло (kg)	0,04
Мин. околна температура (°C)	-30
Макс. околна температура (°C)	60

REFERENCE STANDARD: IEC 61156-5

Frequency	1	4	10	16	31.2	62.5	100	155	200	250	300	MHz
Attenuation	2.1	3.8	6	7.6	10.7	15.5	19.9	25.3	29.1	33	-	dB/100m
NEXT	75.3	66.3	60.3	57.2	52.9	48.4	45.3	42.4	40.8	39.9	-	dB/100m
PS NEXT	72.3	63.3	57.3	54.2	49.9	45.4	42.3	39.4	37.8	36.3	-	dB/100m
ARC	73.2	62.4	54.3	49.6	42.1	32.9	25.4	17.1	11.6	6.3	-	dB/100m
PS ACR	70.2	59.4	51.3	46.6	39.1	29.9	22.4	14.1	8.6	3.3	-	dB/100m
ACR-F	70	58	50	45.9	40.1	34.1	30	26.2	24	22	-	dB/100m
PS ACR-F	67	55	47	42.9	37.1	31.1	27	23.2	21	19	-	dB/100m
Return loss	20	23	25	25	23.6	21.5	20.1	18.8	18	17.3	-	dB/100m
TCL level 1	40	34	30	28	25.1	22	20	18.1	17	16	-	dB/100m
EL TCTL	35	23	15	10.9	5.1	-	-	-	-	-	-	dB/100m
Impedance upper limit	122.2	15.2	111.9	111.9	114.1	118.3	121.9	126	128.8	131.5	-	Ω
Impedance lower limit	81.8	86.8	89.4	89.4	87.7	84.5	82	79.3	77.6	76	-	Ω
Propagation delay	570	552	545	543	539	538	537	537	537	536	-	dB/100m

* Limits below 4 MHz are informative.

TYPICAL VALUES

Frequency	1	4	10	16	31,2	62,5	100	155	200	250	300	MHz
Attenuation	1,65	3,8	5,6	7	10,2	14,9	19,2	24,3	27,5	31	33	dB/100m
NEXT	85	75	70	66	62	58	55	52	50	49	48	dB/100m
PS NEXT	82	72	67	63	59	55	52	49	47	46	45	dB/100m
ACR	82	71	64	59	52	43	36	28	22	18	15	dB/100m
PS ACR	79	68	61	56	49	40	33	25	19	15	12	dB/100m
ACR-F	80	72	65	59	53	45	43	41	40	37	32	dB/100m
PS ACR-F	77	69	62	56	50	42	40	38	37	34	29	dB/100m
RL	25	28		30	30	28	27	26	25	25	25	dB/100m

Typical values are for information only.

Таблица с артикули

Описание	NVP (%)	Тегло на медта (kg/km)	Артикулен No.
U/UTP Кабел Cat.6, 4x2xAWG23/1, 300MHz, LS0H, син Sale per meter	70	20	HSEKU423H1
Акcesoари			
TOOLLESS LINE Кийстоун жак RJ45 неекраниран, Cat.6 (SFA)			HSEMRJ6UWS
Стойка за барабани с кабели до 250kg, широчина до 52cm			HTOOL00006
Велкро кабелна лента черна 16mm x 4m			Q7KB0416-S
Велкро лента синя 16mm x 4m			Q7KB0416-B
Велкро лента за кабели червена 16mm x 4m			Q7KB0416-R
Велкро кабелна лента жълта 16mm x 4m			Q7KB0416-Y
Велкро кабелна лента зелена 16mm x 4m			Q7KB0416-U