




Данни за артикула: HSELS240CS

FO Пачпанел за 12 SC-Duplex couplers, 1U, черно PREMIUM



SCHRACK-Info

These spliceboxes comprise an upper enclosure section, a pull-out tray and 2 depth-adjustable 19" brackets. Pull-out trays are locked via two knurled screws for 12 SC Duplex couplers

Cable-entry:

- Four break-away style openings for M20 cable-gland
- One break-away style opening for optional available cable strain-relief (HSELSFTTDM)

Material: zinc-coated steel

Installation: 19", 1U

Dimensions WxHxD: 483x44x240mm

Color: black

Технически данни

Нето ширина (mm)	482,50
Нето височина (mm)	43,60
Дълбочина (mm)	211,50
Нето тегло (kg)	2,70
Цвят	RAL 9005 (black)
Мин. околна температура (°C)	-10
Макс. околна температура (°C)	70
Продукт	Празни кутии

Dimension drawing

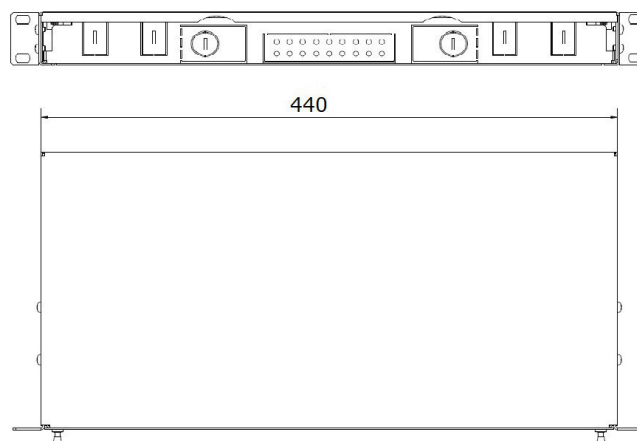
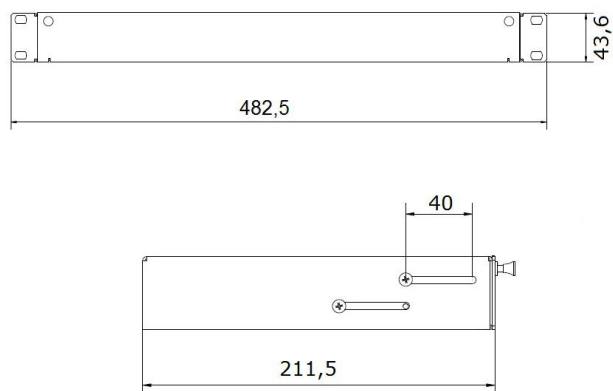


Таблица с артикули

Описание	Артикулен No.
FO Пачпанел за 12 SC-Duplex couplers, 1U, черно PREMIUM	HSELS240CS
Акcesoари	
FO Splice касета, без капак и органайзер, заштракваща, бяла stackable, white, PREMIUM	HSELSZSK01
FO Splice органайзер за 6 влакна, черен, за HSELSZSK01 black, suitable for splice cassette HSELSZSK01, PREMIUM	HSELSZSK02
FO Splice капак за касета, бял, за HSELSZSK01 PREMIUM	HSELSZSK03
Държач, тип панта, син, за HSELSZSK01 PREMIUM	HSELSZSK04
FO държач за 12 броя опт. влакна с протектори, за HELSP0001x черен, suitable for splice cassette HSELSZSK01	HSELSZSK05
FO свиваем сплайс протектор 60mm	HELSP00011
Кабелен съединител M20 LVZZKVS20	HELSP00012
Щуцер IP65 M20x1.5, RAL7035 Clamping range 7 - 12mm, wrench size 24mm	M270020
Контрагайка за шуцер M20x1.5	M271020
FO съединител SC-Duplex, пластмасов, MM	HMOL000059
FO съединител SC-Duplex, пластмасов, SM	HMOL000054
FO Пигтейл SC, 50/125µm OM3, 2.0m, Easy Strip, син, 4 бр. CLASSIC	HLP03C002E
FO Пигтейл SC, 9/125µm OS2, 2.0m, Easy Strip, 4pcs colored according to IEC 60304, CLASSIC	HLP09C042P
FO Пигтейл SC, 9/125µm OS2, 2.0m, Easy Strip, 12pcs colored according to IEC 60304, CLASSIC	HLP09C122P