


Данни за артикула: HSEUBH044T

FO Унив. кабел A/I-DQ(ZN)BH 4x50/125µm OM4,LS0H-3,пт.защ.гр.

С неметална защита от гризачи, черен, 8mm, 5000N, Drum 2100m

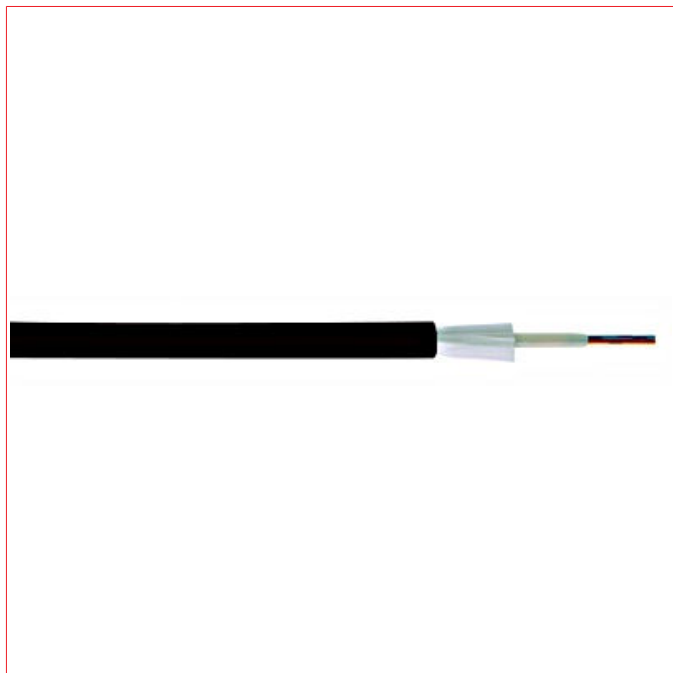

Технически данни

Оптичен брояч	4
Нето диаметър (мм)	7,90
Diameter - Central tube (мм)	4
Primary coating (µm)	250 ± 15
Нето тегло (кг.)	0,07
Подходящ	Universal cable
Watertightness	Yes
Rodent protection	Yes
Predicted lifetime	> 30 Години
Crush resistance (N/m)	≤ 10000
Външна изолация на кабела	LS0H-3
Flame retardancy	Pass
Безхалогенен	pH ≥ 3,5 - µS/cm ≤ 100
Smoke Density	Pass

Технически данни - продължение

Euroclass, съгласно EN50575	Dca
Smoke production	s2
Droplets	d1
Acidity	a1
Температурен обхват - Транспортиране / Съхранение (°C)	-30 to +70
Температурен обхват - при инсталиране (°C)	-5 to +50
Temperature range - Operation (°C)	-30 to +70
Pulling tension - Long term (N)	≤ 2500
Pulling tension - Short term (N)	≤ 5000
Bending radii cable - Static (Ø)	10 x Ø
Bending radii cable - Dynamic (Ø)	15 x Ø
Bending radii for fibres and tubes (Ø)	> 25
Mode-Field / Cladding diameter (µm)	50 ± 2,5 125 ± 1
Wavelength (nm)	850 1300
Attenuation (dB/km)	2,5 / 3,0 0,5 / 1,0
Ширина на лентата (MHz*km)	≥ 3500 ≥ 500
Ethernet performance 1GB (м.)	900 550
Ethernet performance 10GB (м.)	550 300
Numerical aperture	0,20 ± 0,015
Refractive Index	1,482 1,477

GUIDE TO INSTALLATION AND HANDLING

- When laying and installing optical fibre cables it is vitally important not to exceed the specified values set for pulling tension, bending radii and temperature. The installation methods have to be in accordance with the common standards.
- To ease insertion into tubes by means of compressed air or pulling wire, certified lubricants (e.g. paraffin) may be used.
- The use of soap or similar substances as lubricants is strictly prohibited.
- If a cable needs to be fastened, constrictions > 0.3 mm must be prevented.
- The jelly filling inside the tubes can be removed using a tissue soaked in turpentine.
- It is advisable to cap the cable-ends during storage.

Таблица с артикули

Описание	Поръчка No.
FO Унив. кабел A/I-DQ(ZN)BH 4x50/125µm OM4,LSOH-3, nm.заш.гр. С неметална защита от гризачи, черен, 8mm, 5000N, Drum 2100m	HSEUBH044T
Optional Accessories	
FO Пач панел, 4 влакна, LC, 50/125µm OM4, плъзгащ, 19", 1U	HSELS044LG
FO Пач панел, 4 влакна, SC, 50/125µm OM4, плъзгащ, 19", 1U	HSELS044CG