


Данни за артикула: HSKP422HY1

S/FTP кабел Cat.7a, 4x2xAWG22/1, 1200Mhz, LS0H-3, 50%, жълт

Барабан 1000m, жълт

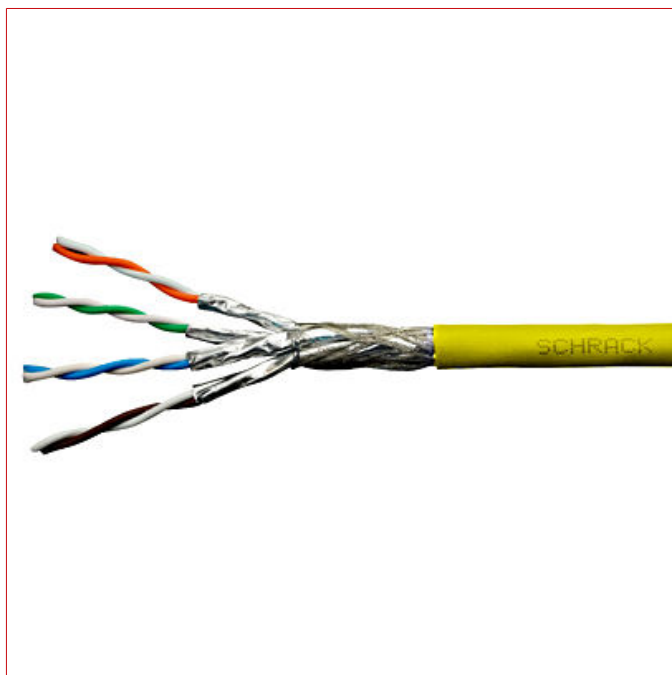

SCHRACK-Info

Installation cables for generic, structured network cabling systems. Support all applications requiring Class D to Class F_A (e.g. 10GBase-T, 1000Base-T, 100Base-TX, ATM) as well as VoIP, 4PPoE. Supports 25Gbase-T (ISO/IEC TR 11801-9905). Due to the cable construction and the high braid coverage of 50%, the cable reaches the coupling attenuation (Type I) of ≥ 85 dB.

S/FTP

Cat. 7_A

LS0H-3

B2_{ca}

25GB

Технически данни

Категория	Cat.7 _A
Конструкция на кабела	S/FTP
Conductor material	Solid bare copper AWG22/1 (0.64mm)
Color code pairs	Pair 1 White / Blue Pair 2 White / Orange Pair 3 White / Green Pair 4 White / Brown
Брой на двойките	4, усукани заедно
Изолационен материал	Foamed polyethylene

Технически данни - продължение

Nominal diameter over insulation (mm)	1,54
Екранировка	ширмован
Pair-Foil	Laminated aluminium polyester, Aluminium facing outside (PiMF)
Overall Shield	Solid tinned copper
Braid coverage (%)	50
Ripcord	Nylon
Външна изолация на кабела	LS0H-3
Изолация на кабела	LS0H-3, FRNC в съответствие с: IEC 61034-1/2, EN 50268-1/2 IEC 60754-1/2, EN 50267-1/2 IEC 60332-3-24, EN 60332-3-24
Euroclass, съгласно EN50575	B2ca
Дим	s1a
Droplets	d1
Acidity	a1
Sheath colour	yellow
Burning load (kJ/m)	700
Външен диаметър (mm)	8,1
Weight nominal (kg/km)	65
Цвят	Жълто
Температурен обхват - работен (°C)	-30 to +60
Температурен обхват - Транспортиране / Съхранение (°C)	-30 to +60
Температурен обхват - при инсталиране (°C)	+0 to +50
Bending radii cable - Static (Ø)	4
Bending radii cable - Dynamic (Ø)	8
Max. pulling tension (N)	110
Номинално напрежение	≤72V DC and ≤50V AC
Max. continuous current per conductor (25°C) (A)	1,5
DC устойчивост при 20° C (Ohm/100m)	≤9,5
Дисбаланс на съпротивлението: в двойка/между двойки (%)	≤2 / ≤4
D.C. insulation resistance: conductor – conductor and conductor – screen (MΩ*km)	≥ 5000
Dielectric strength conductor – conductor (2 sec) (kV DC)	2,5
Dielectric strength conductor – screen (2 sec) (kV DC)	2,5
Вместимост (nF/km)	≤56
Capacitance unbalance pair to ground (pF/km)	≤1600
SKEW (ns/100m)	≤ 25
NVP (%)	73
Опаковка	1000m - drum
IEEE Compliance	PoE: IEEE 802.3bt Type 1, Type 2, Type 3, Type 4

ELECTRICAL CHARACTERISTICS AT 20°C ACCORDING TO IEC 61156-5

	Freq. (MHz)	Specification	Unit
NVP (Nominal velocity of propagation)	4 – 1000	0.73	c
Skew	4 – 1000	≤ 25	ns/100m
Propagation delay	4 – 1000	≤ 534 + 36/Vf	ns/100m
Attenuation	5 – 1000	≤ 1.8*Vf+0.005*f+0.25/Vf	dB
TCL, level 1 (Transverse conversion loss)	1 – 250	> 40 – 10*log (f)	dB
ELTCL (Equal level transverse conversion loss)	1 – 30	> 35 – 20*log (f)	dB
NEXT (Near end cross talk)	4 – 1000	≥ 106-15*log (f) (78 max.)	dB
PS NEXT (Power sum near end cross talk)	4 – 1000	≥ 103-15*log (f) (75 max.)	dB
ACR-N (Attenuation cross talk ratio)	4 – 1000	NEXT – Dämpfung	dB
PS ACR-N (Power sum attenuation cross talk ratio)	4 – 1000	PSNEXT – Dämpfung	dB
ACR-F (Equal level far end cross talk)	4 – 1000	≥ 95.3-20*log (f) (78 max.)	dB
PS ACR-F (Power sum equal level far end cross talk)	4 – 1000	≥ 92.3-20*log (f) (75 max.)	dB
PS ANEXT (Power sum alien near end cross talk)	4 – 1000	≥ 107.5-15*log (f) (67 min.)	dB
PS AACR-F (Power sum alien far end cross talk)	4 – 1000	≥ 92.3-20*log (f) (67 min.)	dB
Input impedance open / short (Zo/s)	4 – 1000	100	Ω
RL (Return loss)	4 ≤ f ≤ 10	≥ 20 + 5*log (f)	dB
	10 ≤ f ≤ 20	≥ 25	dB
	20 ≤ f ≤ 600	≥ 25-7*log (f/20) (17.3 min.)	dB
	600 ≤ f ≤ 1000	≥ 17.3-10*log (f/600)	dB
Coupling attenuation (type I)	30 – 100	≥ 85	dB
	100 – 1000	≥ 85-20*log (f/100)	dB
Transfer impedance (ZT, grade 1)	1	< 10	mΩ/m
	10	< 10	mΩ/m
	30	< 30	mΩ/m
	100	< 100	mΩ/m

REFERENCE STANDARD AT 20°C: IEC 61156-5

Frequency	1 *	4	10	16	30	62,5	100	155	250	500	600	1000	1250 *	MHz
Attenuation	2,1	3,7	5,8	7,3	10,3	14,6	18,5	23,2	29,7	42,8	47,1	61,9	69,9	dB/100m
NEXT	78	78	78	78	78	78	76	73,1	70	65,5	64,3	61	59,5	dB/100m
PS NEXT	75	75	75	75	75	75	73	70,1	67	62,5	61,3	58	56,5	dB/100m
ACR-N	75,9	74,3	72,2	70,7	67,7	63,4	57,5	49,9	40,3	22,7	17,2	-0,9	-10,4	dB/100m
PS ACR-N	72,9	71,3	69,2	67,7	64,7	60,4	54,5	46,9	37,3	19,7	14,2	-3,9	-13,4	dB/100m
ACR-F	78	78	75,3	71,2	65,4	59,4	55,3	51,5	47,3	41,3	39,7	35,3	33,4	dB/100m
PS ACR-F	75	75	72,3	68,2	62,4	56,4	52,3	48,5	44,3	38,3	36,7	32,3	30,4	dB/100m
RL	20	23	25	25	23,6	21,5	20,1	18,8	17,3	17,3	17,3	15,1	14,1	dB/100m

* Limits below 4 MHz and values at 1250 MHz are for information only.

TYPICAL VALUES AT 20°C

Frequency	1*	4	10	16	30	62,5	100	155	250	500	600	1000	1250*	MHz
Attenuation	1,8	3,3	5,3	6,7	9,3	13,4	17,1	20,9	27	39,4	43,3	57,7	65,4	dB/100m
NEXT	103	100	98	97	95	94	93	92	91	90	89	88	87	dB/100m
PS NEXT	100	97	95	94	92	91	90	89	88	87	86	85	84	dB/100m
ACR-N	101	97	93	91	85	81	76	71	64	51	46	30	21	dB/100m
PS ACR-N	98	94	90	88	82	78	73	68	61	48	43	27	18	dB/100m
ACR-F	95	94	93	91	90	87	85	82	71	65	60	50	45	dB/100m
PS ACR-F	92	91	90	88	87	84	82	79	68	62	57	47	42	dB/100m
RL	27	30	32	32	35	33	32	31	27	23	23	19	18	dB/100m

* Limits below 4 MHz and values at 1250 MHz are for information only.

Таблица с артикули

Описание	NVP (%)	Тегло на медта (kg/km)	Артикулен No.
S/FTP кабел Cat.7a, 4x2xAWG22/1, 1200Mhz, LSOH-3,50%, жълт Барабан 1000m, жълт	73	35	HSKP422HY1
Акcesoари			
S-JACK Кийстоун жак RJ45 екp. 10GB 4PPoE 100W Cat.6a, 24 бp. 4PPoE 100W, SFB			HSEMRJ6GS2
S-JACK Кийстоун жак RJ45 екp. 10GB, 4PPoE 100W Cat.6a, 1 бp. 4PPoE 100W, SFB			HSEMRJ6GS1
TOOLLESS LINE Кийстоун жак RJ45 екpаниран, Cat.6a, 10GB (SFA) (SFA)			HSEMRJ6GWA
TOOLLESS LINE Кийстон жак RJ45 екpан., Cat.6a 10GB, 24 бpоя 4PPoE 100W, (SFB), Type: HSEMRJ6GBA			HSEMRJ6GB2
TOOLLESS LINE Кийстоун жак RJ45 екpаниран, Cat.6a, 10GB (SFB) (SFB)			HSEMRJ6GBA
Стойка за барабани с кабели до 250kg, широчина до 52cm			HTOOL00006
Велкро лента синя 16mm x 4m			Q7KB0416-B
Велкро лента за кабели червена 16mm x 4m			Q7KB0416-R
Велкро кабелна лента черна 16mm x 4m			Q7KB0416-S
Велкро кабелна лента жълта 16mm x 4m			Q7KB0416-Y
Велкро кабелна лента зелена 16mm x 4m			Q7KB0416-U