


Данни за артикула: HSKP4233P5

S/FTP Кабел Cat.7, 4x2xAWG23/1, 1.000Mhz, LSOH-3, 30%, син

Барабан 500m

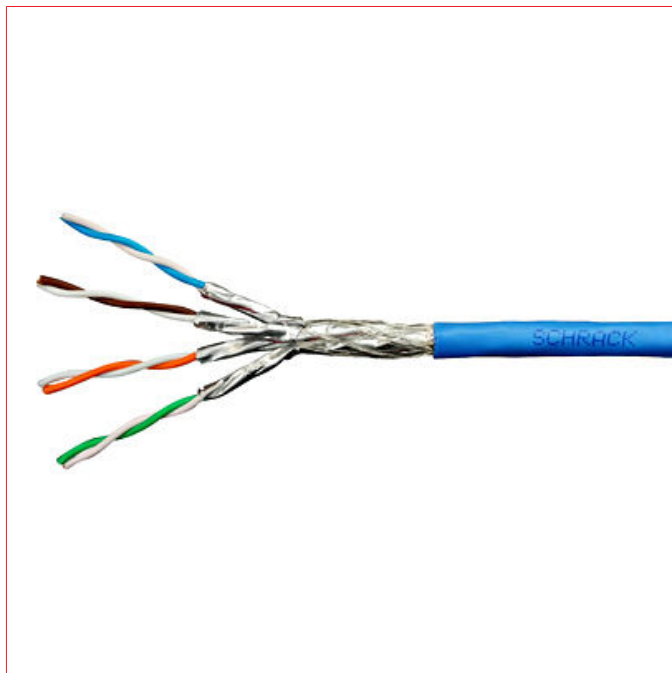

SCHRACK-Info

- Installation cable for generic cabling systems.
- Support current and future applications requiring Class D to F (z.B. 10GBase-T, 1000Base-T, 100Base-TX, ATM) as well as VoIP, PoE,

STANDARDS:

- ISO/IEC 11801, EN 50173-1
- Better than category 7 according to IEC 61156-5, EN 50288-4-1
- Much better than IEEE 802.3an 10 Gigabit Ethernet

S/FTP

Cat. 7

LSOH-3

D_{ca}

Технически данни

Категория	Cat.7
Конструкция на кабела	S/FTP
Conductor material	Solid bare copper AWG23/1 (0.58mm)

Технически данни - продължение

Color code pairs	Pair 1 White / Blue Pair 2 White / Orange Pair 3 White / Green Pair 4 White / Brown
Брой на двойките	4, усукани заедно
Изолационен материал	Foamed polyethylene
Nominal diameter over insulation (mm)	1,45
Екранировка	ширмован
Pair-Foil	Laminated aluminium polyester, Aluminium facing outside (PiMF)
Overall Shield	Solid tinned copper
Braid coverage (%)	30
Ripcord	Nylon
Външна изолация на кабела	LS0H-3
Изолация на кабела	LS0H-3, FRNC в съответствие с: IEC 61034-1/2, EN 50268-1/2 IEC 60754-1/2, EN 50267-1/2 IEC 60332-3-24, EN 60332-3-24
Euroclass, съгласно EN50575	Dca
Дим	s1
Droplets	d1
Acidity	a1
Burning load (kJ/m)	750
Външен диаметър (mm)	7,9
Weight nominal (кг/км)	62
Sheath colour	blue, RAL 5015
Цвят	Синьо
Опаковка	500м барабан
Мин. околна температура (°C)	-30
Макс. околна температура (°C)	60
Температурен обхват - работен (°C)	-30 to +60
Температурен обхват - при инсталиране (°C)	+0 to +50
Bending radii cable - Static (Ø)	4
Bending radii cable - Dynamic (Ø)	8
Max. pulling tension (N)	110
Номинално напрежение	72 VDC
Max. continuous current per conductor (25°C) (A)	1,5
DC устойчивост при 20° C (Ohm/100m)	< 9,5
Дисбаланс на съпротивлението: в двойка/между двойки (%)	< 2 / < 4
D.C. insulation resistance: conductor – conductor and conductor – screen (MΩ*km)	≥ 5000
Dielectric strength conductor – conductor (2 sec) (kV DC)	2,5
Dielectric strength conductor – screen (2 sec) (kV DC)	2,5
Вместимост (nF/km)	< 56

Технически данни - продължение

Capacitance unbalance pair to ground (pF/km)	< 1600
NVP (%)	78
Нето дължина (mm)	1.000,00
Нето тегло (kg)	0,06
Нето диаметър (mm)	7,90

ELECTRICAL CHARACTERISTICS AT 20°C ACCORDING TO IEC 61156-5

	Freq. (MHz)	Specification	Unit
NVP (Nominal velocity of propagation)	4 – 600	0,78	c
Skew	4 – 600	≤ 25	ns/100m
Propagation delay	4 – 600	≤ 534 + 36/Vf	ns/100m
Attenuation	4 – 600	≤ 1,8*Vf+0,01*f+0,20/Vf	dB
TCL, level 1 (Transverse conversion loss)	1 – 250	> 40 – 10*log (f)	dB
ELTCL (Equal level transverse conversion loss)	1 – 30	> 35 – 20*log (f)	dB
NEXT (Near end cross talk)	4 – 600	≥ 102,4-15*log (f) (78 max.)	dB
PS NEXT (Power sum near end cross talk)	4 – 600	≥ 99,4-15*log (f) (75 max.)	dB
ACR-N (Attenuation cross talk ratio)	4 – 600	NEXT – Dämpfung	dB
PS ACR-N (Power sum attenuation cross talk ratio)	4 – 600	PSNEXT – Dämpfung	dB
ACR-F (Equal level far end cross talk)	4 – 600	≥ 95,3-20*log (f) (78 max.)	dB
PS ACR-F (Power sum equal level far end cross talk)	4 – 600	≥ 92,3-20*log (f) (75 max.)	dB
Input impedance open / short (Zo/s)	4 – 600	100	Ω
RL (Return loss)	4 ≤ f ≤ 10	≥ 20 + 5*log (f)	dB
	10 ≤ f ≤ 20	≥ 25	dB
	20 ≤ f ≤ 600	≥ 25-7*log (f/20)	dB
Coupling attenuation (type I)	30 – 100	≥ 55	dB
	100 – 1000	≥ 55-20*log (f/100)	dB
Transfer impedance (ZT, grade 1)	1	< 50	mΩ/m
	10	< 100	mΩ/m
	30	< 200	mΩ/m
	100	< 1000	mΩ/m

REFERENCE STANDARD AT 20°C: IEC 61156-5

Frequency	1 *	4	10	16	31,2	62,5	100	125	200	250	300	600	1000*	MHz
Attenuation	2	3,7	5,9	7,4	10,4	14,9	19	21,4	27,5	31,0	34,2	50,1	66,9	dB/100m
NEXT	78	78	78	78	78	75,5	72,4	70,9	67,9	66,4	65,2	60,7	57,4	dB/100m
PS NEXT	75	75	75	75	75	72,5	69,4	67,9	64,9	63,4	62,2	57,7	54,4	dB/100m
ACR-N	76,0	74,3	72,1	70,6	67,6	60,6	53,4	49,6	40,4	35,5	40,4	10,6	-9,5	dB/100m
PS ACR-N	73	71,3	69,1	67,6	64,6	57,6	50,4	46,6	37,4	32,5	28,1	7,6	-12,5	dB/100m
ACR-F	78	78	75,3	71,2	65,4	59,4	55,3	53,4	49,3	47,3	45,8	39,7	35,3	dB/100m
PS ACR-F	75	75	72,3	68,2	62,4	56,4	52,3	50,4	46,3	44,3	42,8	36,7	32,3	dB/100m
RL	20	23	25	25	23,6	21,5	20,1	19,4	18	17,3	17,3	17,3	17,3	dB/100m
TCL level 1	40	34	30	28	25,1	22	20	19	17	16				dB/100m
EL TCTL	35	23	15	10,9	5,1									dB/100m
Impedanceupper limit	122,2	115,2	111,9	111,9	114,1	118,3	121,9	123,9	128,8	131,5	131,6	131,6	142,8	Ω
Impedancelower limit	81,6	86,8	89,4	89,4	87,7	84,5	82,0	80,7	77,7	76	76	76	70	Ω
Operational time	570	552	545	543	540	539	538	537	536	536	536	535	535	ns/100m

* Limits below 4 MHz and values at 1000 MHz are for information only.

TYPICAL VALUES AT 20°C

Frequency	1 *	4	10	16	31,3	62,5	100	125	200	300	600	1000	MHz
Attenuation	1,8	3,3	5,3	6,7	9,4	13,4	17,1	19,3	26,7	30,8	45,5	60,3	dB/100m
NEXT	103	100	98	97	95	94	93	92	91	90	89	88	dB/100m
PS NEXT	100	97	95	94	92	91	90	89	88	87	86	85	dB/100m
ACR-N	101	97	93	91	85	81	76	71	64	59	43	28	dB/100m
PS ACR-N	98	94	90	88	82	78	73	70	61	56	40	25	dB/100m
ACR-F	95	94	93	91	90	87	85	83	77	74	60	50	dB/100m
PS ACR-F	92	91	92	88	87	84	82	80	74	71	57	47	dB/100m
RL	27	30	32	32	35	33	32	31	30	25	23	21	dB/100m

* Limits below 4 MHz and values at 1000 MHz are for information only.

Таблица с артикули

Описание	NVP (%)	Тегло на медта (kg/km)	Артикулен No.
S/FTP Кабел Cat.7, 4x2xAWG23/1, 1.000Mhz, LS0H-3, 30%, син Барабан 500m	78	25,5	HSKP4233P5
Акcesoари			
PERFORMANCE LINE Кийст. RJ45 екp., Cat.6a 10GB 4PPoE 100W (SFB)			HSPMRJ6G1A
PERFORMANCE LINE Кийст. жак RJ45 екpиpан, Cat.6a 10GB PoE+ (SFB)			HSPMRJ6G1T
TOOLLESS LINE Кийстоун жак RJ45 екpиpан, Cat.6a, 10GB (SFA) (SFA)			HSEMRJ6GWA
TOOLLESS LINE Кийстоун жак RJ45 екpиpан, Клас Ea, 10GB(SFA) (SFA)			HSEMRJ6GWT
TOOLLESS LINE Кийстоун жак RJ45 екpиpан, Cat.6 (SFA)			HSEMRJ6GWS
Стойка за барабани с кабели до 250kg, широчина до 52cm			HTOOL000006
Велкро лента синя 16mm x 4m			Q7KB0416-B
Велкро лента за кабели червена 16mm x 4m			Q7KB0416-R
Велкро кабелна лента черна 16mm x 4m			Q7KB0416-S
Велкро кабелна лента жълта 16mm x 4m			Q7KB0416-Y
Велкро кабелна лента зелена 16mm x 4m			Q7KB0416-U