


Данни за артикула: HSKP823HB9

S/FTP Кабел Cat.7, 2x(4x2xAWG23/1), 1.000Mhz, LSOH, син

СИН

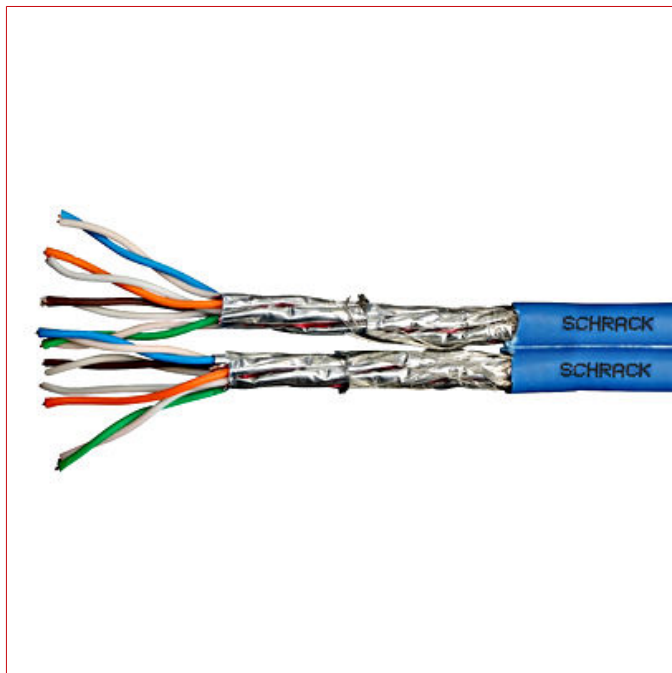

SCHRACK-Info

- Installation cable for generic cabling systems.
- Support current and future applications requiring Class D to F (z.B. 10GBase-T, 1000Base-T, 100Base-TX, ATM) as well as VoIP, PoE, 4PPoE
- Primary (Campus), Secondary (Riser), Teritary (Horizontal)
- Version: Simplex

STANDARDS:

- ISO/IEC 11801, EN 50173-1
- Better than category 7 according to IEC 61156-5, EN 50288-4-1
- Much better than IEEE 802.3an 10 Gigabit Ethernet



Технически данни

Серия	S-JACK
Категория	Cat.7

Технически данни - продължение

Конструкция на кабела	S/FTP
Conductor material	Solid bare copper AWG23/1 (0.58mm)
Color code pairs	Pair 1 White / Blue Pair 2 White / Orange Pair 3 White / Green Pair 4 White / Brown
Брой на двойките	2 x 4, усукани заедно
Изолационен материал	Foamed polyethylene
Nominal diameter over insulation (mm)	1 43
Екранировка	ширмован
Pair-Foil	Laminated aluminium polyester, Aluminium facing outside (PiMF)
Overall Shield	Solid tinned copper
Braid coverage (%)	40
Ripcord	Nylon
Външна изолация на кабела	LS0H
Изолация на кабела	LS0H, FRNC в съответствие с: IEC 61034-1/2, EN 50268-1/2 IEC 60754-1/2, EN 50267-1/2 IEC 60332-1, EN 60332-1
Euroclass, съгласно EN50575	Dca
Дим	s2
Droplets	d2
Acidity	a1
Burning load (kJ/m)	1000
Външен диаметър (mm)	7,0 x 15,4
Weight nominal (kg/km)	111
Sheath colour	blue, RAL 5015
Цвят	Синьо
Температурен обхват - работен (°C)	-30 to +60
Температурен обхват - при инсталиране (°C)	+0 to +50
Bending radii cable - Static (Ø)	4
Bending radii cable - Dynamic (Ø)	8
Max. pulling tension (N)	220
Номинално напрежение	≤72V DC and ≤50V AC
Max. continuous current per conductor (25°C) (A)	1,5
DC устойчивост при 20° C (Ohm/100m)	≤9,5
Дисбаланс на съпротивлението: в двойка/между двойки (%)	≤2 / ≤4
D.C. insulation resistance: conductor – conductor and conductor – screen (MΩ*km)	≥ 5000
Dielectric strength conductor – conductor (2 sec) (kV DC)	2,5
Dielectric strength conductor – screen (2 sec) (kV DC)	2,5
Вместимост (nF/km)	≤56

Технически данни - продължение

Capacitance unbalance pair to ground (pF/km)	≤1600
NVP (%)	78
IEEE Compliance	PoE: IEEE 802.3bt Type 1, Type 2, Type 3, Type 4
Опаковка	100m
Опаковка	Drum 100m

ELECTRICAL CHARACTERISTICS AT 20°C ACCORDING TO IEC 61156-5

	Freq. (MHz)	Specification	Unit
NVP (Nominal velocity of propagation)	4 – 600	0.78	c
Skew	4 – 600	≤ 25	ns/100m
Propagation delay	4 – 600	≤ 534 + 36/Vf	ns/100m
Attenuation	4 – 600	≤ 1.8 * Vf + 0.01 * f + 0.20/Vf	dB
TCL, level 1 (Transverse conversion loss)	1 – 250	≥ 40 – 10 * log (f)	dB
ELTCL (Equal level transverse conversion loss)	1 – 30	≥ 35 – 20 * log (f)	dB
NEXT (Near end cross talk)	4 – 600	≥ 102.4 - 15 * log (f) (78 max.)	dB
PS NEXT (Power sum near end cross talk)	4 – 600	≥ 99.4 - 15 * log (f) (75 max.)	dB
ACR-N (Attenuation cross talk ratio)	4 – 600	NEXT – Dämpfung	dB
PS ACR-N (Power sum attenuation cross talk ratio)	4 – 600	PSNEXT – Dämpfung	dB
ACR-F (Equal level far end cross talk)	4 – 600	≥ 95.3 - 20 * log (f) (78 max.)	dB
PS ACR-F (Power sum equal level far end cross talk)	4 – 600	≥ 92.3 - 20 * log (f) (75 max.)	dB
Input impedance open / short (Zo/s)	4 – 600	100	Ω
RL (Return loss)	4 ≤ f ≤ 10	≥ 20 + 5 * log (f)	dB
	10 ≤ f ≤ 20	≥ 25	dB
	20 ≤ f ≤ 600	≥ 25 - 7 * log (f/20)	dB
Coupling attenuation (type I)	30 – 100	≥ 85	dB
	100 – 1000	≥ 85 - 20 * log (f/100)	dB
Transfer impedance (ZT, grade 1)	1	< 10	mΩ/m
	10	< 10	mΩ/m
	30	< 30	mΩ/m
	100	< 100	mΩ/m

REFERENCE STANDARD: IEC 61156-5

Frequency	1*	4	10	16	31,3	62,5	100	125	200	300	600	1000*	MHz
Attenuation	2	3.7	5.9	7.4	10.4	14.9	19	21.4	27.5	34.2	50.1	66.9	dB/100m
NEXT	78	78	78	78	78	75.5	72.4	70.9	67.9	65.2	60.7	57.4	dB/100m
PS NEXT	75	75	75	75	75	72.5	69.4	67.9	64.9	62.2	57.7	54.4	dB/100m
ACR-N	76	74.3	72.1	70.6	67.6	60.6	53.4	49.6	40.4	31.1	10.6	-9.5	dB/100m
PS ACR-N	73	71.3	69.1	67.6	64.6	57.6	50.4	46.6	37.4	28.1	7.6	-12.5	dB/100m
ACR-F	78	78	75.3	71.2	65.4	59.4	55.3	53.4	49.3	45.8	39.7	35.3	dB/100m
PS ACR-F	75	75	72.3	68.2	62.4	56.4	52.3	50.4	46.3	42.8	36.7	32.3	dB/100m
RL	20	23	25	25	23.6	21.5	20.1	19.4	18	17.3	17.3	15.1	dB/100m

* Limits below 4 MHz and values at 1000 MHz are for information only.

TYPICAL VALUES

Frequency	1 *	4	10	16	31,3	62,5	100	125	200	300	600	1000	MHz
Attenuation	1,8	3,3	5,3	6,7	9,4	13,4	17,1	19,3	26,7	30,8	45,5	60,3	dB/100m
NEXT	103	100	98	97	95	94	93	92	91	90	89	88	dB/100m
PS NEXT	100	97	95	94	92	91	90	89	88	87	86	85	dB/100m
ACR-N	101	97	93	91	85	81	76	71	64	59	43	28	dB/100m
PS ACR-N	98	94	90	88	82	78	73	70	61	56	40	25	dB/100m
ACR-F	95	94	93	91	90	87	85	83	77	74	60	50	dB/100m
PS ACR-F	92	91	92	88	87	84	82	80	74	71	57	47	dB/100m
RL	27	30	32	32	35	33	32	31	30	25	23	21	dB/100m

* Limits below 4 MHz and values at 1000 MHz are for information only.

Таблица с артикули

Описание	NVP (%)	Тегло на медта (kg/km)	Артикулен No.
S/FTP Кабел Cat.7, 2x(4x2xAWG23/1), 1.000Mhz, LSOH, син	78	56	HSPK823HB9
син			
Акcesoари			
S-JACK Кийстоун жак RJ45 екp. 10GB 4PPoE 100W Cat.6a, 24 бp.			HSEMRJ6GS2
4PPoE 100W, SFB			
S-JACK Кийстоун жак RJ45 екp. 10GB, 4PPoE 100W Cat.6a, 1 бp.			HSEMRJ6GS1
4PPoE 100W, SFB			
TOOLLESS LINE Кийстоун жак RJ45 екpаниран, Cat.6a, 10GB (SFA)			HSEMRJ6GWA
(SFA)			
TOOLLESS LINE Кийстоун жак RJ45 екpаниран, Клас Ea, 10GB(SFA)			HSEMRJ6GWT
(SFA)			
TOOLLESS LINE Кийстоун жак RJ45 екpаниран, Cat.6 (SFA)			HSEMRJ6GWS
Стойка за барабани с кабели до 250kg, широчина до 52cm			HTOOL00006
Велкро лента синя 16mm x 4m			Q7KB0416-B
Велкро лента за кабели червена 16mm x 4m			Q7KB0416-R
Велкро кабелна лента черна 16mm x 4m			Q7KB0416-S
Велкро кабелна лента жълта 16mm x 4m			Q7KB0416-Y
Велкро кабелна лента зелена 16mm x 4m			Q7KB0416-U