

Данни за артикула: IKA21320--

Редова клемма за Al/Cu проводници, 1 полюс, синя, 50mm²

Cu 150A, Al 150A



Schrack Info

- Distribution block for connecting Al and Cu conductors
- 50mm² up to 300mm² models available
- When using aluminium conductors the common practices for installation must be observed
- Adjust the contact clamps after 6-8 weeks
- Aluminum-terminals for solid round conductors (RE), multi-wire conductors (RM), fine-stranded conductors with end ferrules and also sector conductors (SE and SM)

Технически данни

Дълбочина (mm)	43,00
Нето ширина (mm)	20,00
Нето височина (mm)	70,00
Нето тегло (kg)	0,04
EAN	9004840594669
Разсейвана мощност (W)	1,40
Мин. околна температура (°C)	-25
Макс. околна температура (°C)	80
Основно описание	Клема

Таблични файлове: Редова клема за Al/Cu проводници, 1 полюс, синя, 50mm²

Vorschriften:	Zulassung nach IEC 60947-7-1, IEC 61238-1 (Klasse A)		
Nennspannung:	1.000VAC/1.000VDC		
Strombelastbarkeit:	150A (2x50mm ²) nach IEC 60947-7-1 Geprüft durch SGS Fimko Ltd		
Bemessungsquerschnitt:	50mm ²		
Stoßspannungsfestigkeit:	8kV		
Verschmutzungsgrad:	3		
Überspannungskategorie:	III		
CTI Wert:	550		
Anschlussquerschnitte:	Anzahl Anschlüsse: 2x50mm ² (Rund&Sektorleiter)		
	IEC 60947-7-1		IEC 61238-1
	Cu		Al
	Mehrdrähtig	Feindrähtig mit Aderendhülse	Mehrdrähtig
50mm ²	10Nm	/	14Nm
35mm ²		10Nm	
25mm ²	8Nm	8Nm	12Nm
16mm ²			10Nm
10mm ²	6Nm	6Nm	/
6mm ²			
4mm ²	/		
Abisolierlänge	16mm		
Innensechskant	M10 (SW 5mm)		
Werkstoffe:	Klemmkörper:	Aluminium	verzinnt
	Gehäuse:	PA 6 (Halogenfrei)	
	Schrauben:	Stahl	verzinnt
Flammwidrigkeit:	Selbstverlöschend		
Ausführung	Fingersicher IP 20		

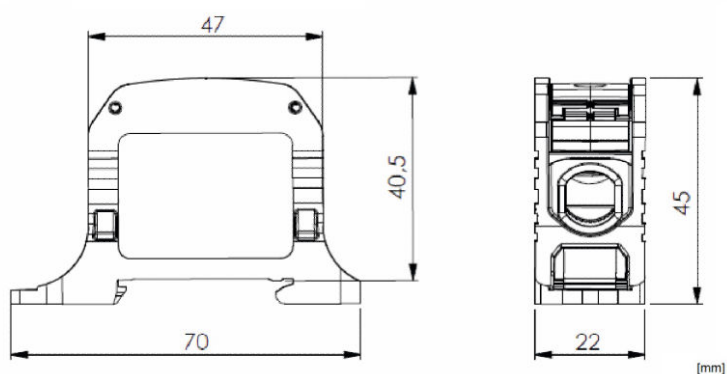
Чертеж: Редова клема за Al/Cu проводници, 1 полюс, синя, 50mm²

Таблица с артикули

Описание	Артикулен No.
Редова клема за Al/Cu проводници, 1 полюс, синя, 50mm ² Cu 150A, Al 150A	IKA21320
Необходими аксесоари	
Контактна грес, за защитен слой за Al-кабели, 200g 200g tube, Calium fat DIN 51825 K 2 C-40, e.g. for the processing of aluminum	IKAP0200