

Данни за артикула: IL036239-F

## Табло за стенен монтаж, с врата с върт. ръкохватка, 2А-39

Sheet steel, RAL7035, 1 gland plate above and below



### SCHRACK-Info

- Modular designed wall-mounted frame with door
- Material: 1.25 mm powder coated sheet steel
- Phosphated, plastic powder-coated sheet steel enclosure tested and certified according to EN 62208:2011 and EN 60529:1991, protection class I suitable for TT/TN and IT network form, protection insulated according to ÖVE-IM 12
- The enclosures with 300mm and 400mm depth are designed with riveted steel sheet back panel and 3-point rod lock with swing handle prepared for installation of various half cylinder locks
- rated voltage  $U_e$ : 230/400V/50Hz
- rated insulation voltage  $U_i$ : 1000V
- rated impulse withstand voltage  $U_{imp}$ : 6kV
- rated short time withstand current  $I_{cw}$ : 25kA / 1s
- rated peak withstand current  $I_{pk}$ : 54kA
- rated conditional short-circuit current  $I_{cc}$ : 25kA
- Protective earth connection: Welded bolt M6,  $I^2t=3,6 \times 10^6 \text{ A}^2\text{s}$
- Protection class: I
- Ambient temperature: -5 to +40°C
- Relative humidity: 50% at +40°C
- Max. allowed load capacity: Use 150kg floor-mounted / Use 80kg wall-mounted (without additional supports) / door 10kg
- EMV: EMV Environment 1


- Distribution board Insert width D: 500mm / Height E: 1795mm



## Технически данни


|                        |                    |
|------------------------|--------------------|
| Нето ширина (mm)       | 590,00             |
| Нето височина (mm)     | 1.885,00           |
| Дълбочина (mm)         | 300,00             |
| Нето тегло (kg)        | 15,00              |
| EAN                    | 9004840254570      |
| Разсейвана мощност (W) | -543,00            |
| Тип                    | за монтаж на стена |
| Цвят                   | RAL 7035           |
| Ширина в модули        | 2                  |
| HU                     | 39                 |
| Степен на защита - IP  | IP20C              |
| Основно описание       | Рамка              |

## Чертеж: Табло за стенен монтаж, с врата с върт. ръкохватка, 2A-39

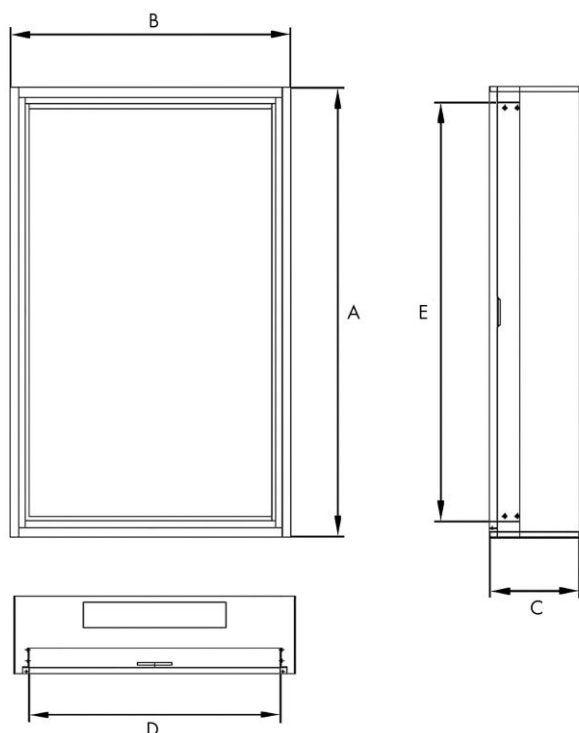


## Чертеж: Табло за стенен монтаж, с врата с върт. ръкохватка, 2А-39


IL900102

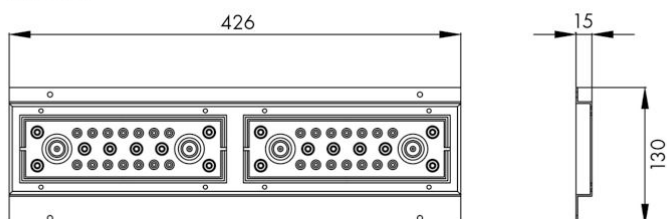

IL900105

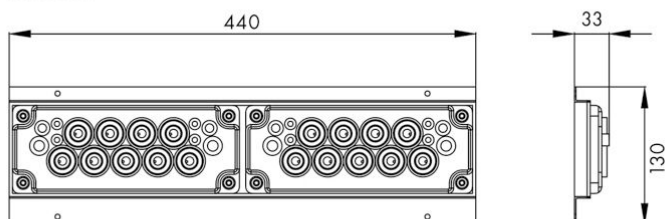

IL900415-F

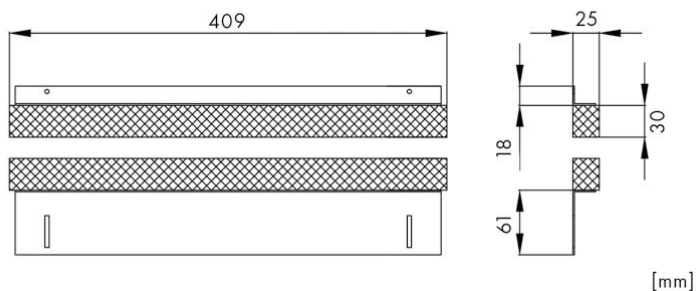

[mm]

## Таблични файлове: Табло за стенен монтаж, с врата с върт. ръкохватка, 2А-39

| Type                | Article number | Number of gland plates above | Number of gland plates below | A [mm] | B [mm] | C [mm] | D [mm] | E [mm] | Radiant power loss [W]* |
|---------------------|----------------|------------------------------|------------------------------|--------|--------|--------|--------|--------|-------------------------|
| <b>Depth 100 mm</b> |                |                              |                              |        |        |        |        |        |                         |
| 2A12                | IL006912-F     | -                            | -                            | 640    | 590    | 100    | 500    | 555    | -140                    |
| 2A18                | IL006918-F     | -                            | -                            | 915    | 590    | 100    | 500    | 830    | -193                    |
| <b>Depth 180 mm</b> |                |                              |                              |        |        |        |        |        |                         |
| 1A7                 | IL006107-F     | -                            | -                            | 410    | 380    | 180    | 290    | 325    | -86                     |
| 1A12                | IL006112-F     | -                            | -                            | 640    | 380    | 180    | 290    | 555    | -124                    |
| 2A7                 | IL006207-F     | -                            | -                            | 410    | 590    | 180    | 500    | 325    | -119                    |
| 2A12                | IL006212-F     | -                            | -                            | 640    | 590    | 180    | 500    | 555    | -170                    |
| 2A12                | IL0062121-F    | 1                            | -                            | 640    | 590    | 180    | 500    | 555    | -170                    |
| 2A12                | IL0062122-F    | 1                            | 1                            | 640    | 590    | 180    | 500    | 555    | -170                    |
| 3A12                | IL006312-F     | -                            | -                            | 640    | 810    | 180    | 720    | 555    | -221                    |
| 4A12                | IL006412-F     | -                            | -                            | 640    | 1030   | 180    | 940    | 555    | -273                    |
| <b>Depth 250 mm</b> |                |                              |                              |        |        |        |        |        |                         |
| 1A16                | IL006116-F     | -                            | -                            | 830    | 380    | 250    | 290    | 745    | -183                    |
| 1A18                | IL006118-F     | -                            | -                            | 915    | 380    | 250    | 290    | 830    | -199                    |
| 1A21                | IL006121-F     | -                            | -                            | 1055   | 380    | 250    | 290    | 970    | -225                    |
| 1A24                | IL006124-F     | -                            | -                            | 1195   | 380    | 250    | 290    | 1105   | -252                    |
| 1A28                | IL006128-F     | -                            | -                            | 1380   | 380    | 250    | 290    | 1290   | -286                    |
| 1A42                | IL006142-F     | -                            | -                            | 2025   | 380    | 250    | 290    | 1935   | -408                    |
| 2A18                | IL006218-F     | -                            | -                            | 915    | 590    | 250    | 500    | 830    | -264                    |
| 2A18                | IL0062181-F    | 1                            | -                            | 915    | 590    | 250    | 500    | 830    | -264                    |
| 2A18                | IL0062182-F    | 1                            | 1                            | 915    | 590    | 250    | 500    | 830    | -264                    |
| 2A21                | IL006221-F     | 1                            | -                            | 1055   | 590    | 250    | 500    | 970    | -299                    |
| 2A24                | IL006224-F     | 1                            | -                            | 1195   | 590    | 250    | 500    | 1105   | -333                    |
| 2A28                | IL006228-F     | 1                            | -                            | 1380   | 590    | 250    | 500    | 1290   | -379                    |
| 2A33                | IL006233-F     | 1                            | -                            | 1605   | 590    | 250    | 500    | 1520   | -434                    |
| 2A39                | IL006239-F     | 1                            | 1                            | 1885   | 590    | 250    | 500    | 1795   | -503                    |
| 2A42                | IL006242-F     | 1                            | 1                            | 2025   | 590    | 250    | 500    | 1935   | -537                    |
| 2A45                | IL006245-F     | 1                            | 1                            | 2160   | 590    | 250    | 500    | 2070   | -570                    |
| 3A18                | IL006318-F     | -                            | -                            | 915    | 810    | 250    | 720    | 830    | -334                    |
| 3A21                | IL006321-F     | 1                            | -                            | 1055   | 810    | 250    | 720    | 970    | -376                    |
| 3A24                | IL006324-F     | 1                            | -                            | 1195   | 810    | 250    | 720    | 1105   | -419                    |
| 3A28                | IL006328-F     | 1                            | -                            | 1380   | 810    | 250    | 720    | 1290   | -475                    |
| 3A33                | IL006333-F     | 1                            | -                            | 1605   | 810    | 250    | 720    | 1520   | -544                    |
| 3A39                | IL006339-F     | 1                            | 1                            | 1885   | 810    | 250    | 720    | 1795   | -629                    |
| 3A42                | IL006342-F     | 1                            | 1                            | 2025   | 810    | 250    | 720    | 1935   | -672                    |
| 3A45                | IL006345-F     | 1                            | 1                            | 2160   | 810    | 250    | 720    | 2070   | -713                    |
| 4A18                | IL006418-F     | -                            | -                            | 915    | 1030   | 250    | 940    | 830    | -403                    |
| 4A21                | IL006421-F     | 2                            | -                            | 1055   | 1030   | 250    | 940    | 970    | -454                    |
| 4A24                | IL006424-F     | 2                            | -                            | 1195   | 1030   | 250    | 940    | 1105   | -505                    |
| 4A28                | IL006428-F     | 2                            | -                            | 1380   | 1030   | 250    | 940    | 1290   | -572                    |
| 4A33                | IL006433-F     | 2                            | -                            | 1605   | 1030   | 250    | 940    | 1520   | -654                    |
| 4A39                | IL006439-F     | 2                            | 2                            | 1885   | 1030   | 250    | 940    | 1795   | -756                    |
| 4A42                | IL006442-F     | 2                            | 2                            | 2025   | 1030   | 250    | 940    | 1935   | -807                    |
| 4A45                | IL006445-F     | 2                            | 2                            | 2160   | 1030   | 250    | 940    | 2070   | -856                    |
| 5A24                | IL006524-F     | 2                            | -                            | 1195   | 1230   | 250    | 1140   | 1105   | -583                    |
| 5A28                | IL006528-F     | 2                            | -                            | 1380   | 1230   | 250    | 1140   | 1290   | -660                    |
| 5A33                | IL006533-F     | 2                            | -                            | 1605   | 1230   | 250    | 1140   | 1520   | -754                    |
| 5A39                | IL006539-F     | 2                            | 2                            | 1885   | 1230   | 250    | 1140   | 1795   | -871                    |
| 5A42                | IL006542-F     | 2                            | 2                            | 2025   | 1230   | 250    | 1140   | 1935   | -930                    |

|              |            |   |   |      |      |     |      |      |       |
|--------------|------------|---|---|------|------|-----|------|------|-------|
| 5A45         | IL006545-F | 2 | 2 | 2160 | 1230 | 250 | 1140 | 2070 | -986  |
| Depth 300 mm |            |   |   |      |      |     |      |      |       |
| 2A39         | IL036239-F | 1 | 1 | 1885 | 590  | 300 | 500  | 1795 | -543  |
| 2A42         | IL036242-F | 1 | 1 | 2025 | 590  | 300 | 500  | 1935 | -580  |
| 2A45         | IL036245-F | 1 | 1 | 2160 | 590  | 300 | 500  | 2070 | -616  |
| 3A39         | IL036339-F | 1 | 1 | 1885 | 810  | 300 | 720  | 1795 | -673  |
| 3A42         | IL036342-F | 1 | 1 | 2025 | 810  | 300 | 720  | 1935 | -718  |
| 3A45         | IL036345-F | 1 | 1 | 2160 | 810  | 300 | 720  | 2070 | -762  |
| 4A39         | IL036439-F | 2 | 2 | 1885 | 1030 | 300 | 940  | 1795 | -802  |
| 4A42         | IL036442-F | 2 | 2 | 2025 | 1030 | 300 | 940  | 1935 | -856  |
| 4A45         | IL036445-F | 2 | 2 | 2160 | 1030 | 300 | 940  | 2070 | -907  |
| 5A39         | IL036539-F | 2 | 2 | 1885 | 1230 | 300 | 1140 | 1795 | -920  |
| 5A42         | IL036542-F | 2 | 2 | 2025 | 1230 | 300 | 1140 | 1935 | -981  |
| 5A45         | IL036545-F | 2 | 2 | 2160 | 1230 | 300 | 1140 | 2070 | -1040 |
| Depth 400 mm |            |   |   |      |      |     |      |      |       |
| 2A42         | IL009242-F | 1 | 1 | 2025 | 590  | 400 | 500  | 1935 | -666  |
| 3A42         | IL009342-F | 1 | 1 | 2025 | 810  | 400 | 720  | 1935 | -810  |
| 4A42         | IL009442-F | 2 | 2 | 2025 | 1030 | 400 | 940  | 1935 | -954  |
| 5A42         | IL009542-F | 2 | 2 | 2025 | 1230 | 400 | 1140 | 1935 | -1085 |

\* Max. radiated power of housing calculated as a wall-mounted single fixed with  $\Delta T = 35K$ .

Detailed information and legal notes see page 9

## Таблица с артикули

| Описание                                                                                                                         | Артикулен No. |
|----------------------------------------------------------------------------------------------------------------------------------|---------------|
| Табло за стенен монтаж, с врата с върт. ръкохватка, 2А-39<br>Sheet steel, RAL7035, 1 gland plate above and below                 | IL036239-F    |
| <b>Аксессуары</b>                                                                                                                |               |
| Гумирана плоча за кабелни вх., IP20С, 18 входа - 18 до 30mm<br>за IL001/006/009/036, ширина 2,3,4,5                              | IL900105      |
| Flange with 2 push through flanges, size 2, 426x130x18mm<br>W=426 H=130 D=15 mm, Cable glands: 28x 13 mm, 16x 17 mm and 4x 30 mm | IL900102      |
| Комплект странични панели за основа (2 бр.), 300mm<br>Подходящи за табла тип IP54 и IP20-С                                       | IL091130      |
| Предна/задна рамка за основа за Modul 2000, 2А<br>redesigned U-Profile Depth 8mm, 2mm Sheet Steel                                | IL091200-S    |
| Странични панели за основа, 300mm, вентилирани, 2бр., 100mm<br>inclusive Screws, cutting 190x50mm                                | IL090130-V    |
| Странични панели за основа, 300mm, вентилирани, 2бр., 200mm<br>inclusive Screws, cutting 190x50mm                                | IL090230-V    |