


Данни за артикула: IL153121TS

Masken-Zählerverteiler 1M-21E/TIR 1ZP, H1010B330T200mm

1 място за електромер, 1 Релса за електромери, 1 последващ електромер, 13
Широчина на модула, Преден панел ламарина, Tyrol

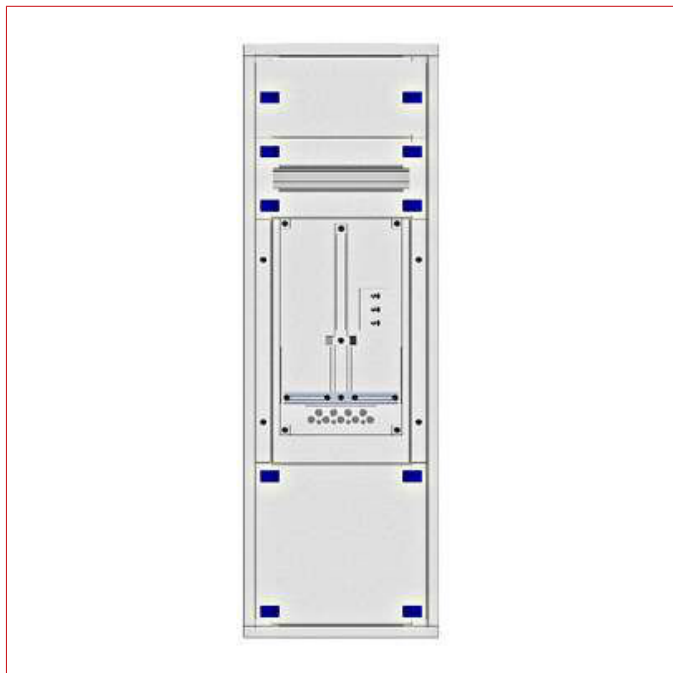

SCHRACK-Info

- Modular aufgebauter Maskenverteiler mit PVC-Rückwand ohne Tür
- Material: 1 mm pulverbeschichtetes Stahlblech
- Phosphatierter, kunststoffpulverbeschichteter Stahlblechverteiler geprüft und zertifiziert nach EN 62208:2011 und EN 60529:1991, Schutzklasse I für TT/TN und IT Netzform geeignet, schutzisoliert nach ÖVE-IM 12
- Die Ausführung des Vorzählerteils besteht aus einer plombierbaren Abdeckung mit montierter Alu/HC Schiene und einer Montageplatte ab 4 Zählerplätze
- Bemessungsspannung Ue: 230/400V/50Hz
- Bemessungsisolationsspannung Ui: 1000V
- Bemessungsstoßspannungsfestigkeit Uimp: 6kV
- Bemessungskurzzeitstromfestigkeit Icw: 25kA / 1s
- Bemessungsstoßstromfestigkeit Ipk: 54kA
- Bedingter Bemessungskurzschlussstrom Icc: 25kA
- Schutzklasse: I
- EMV: EMV Umgebung 1
- komplett bestückt und vorverdrahtet auf Anfrage



Технически данни

Нето ширина (mm)	330,00
Нето височина (mm)	1.010,00
Дълбочина (mm)	200,00
EAN	9004840633986
Разсейвана мощност (W)	-178,00
Тип	Masken-Verteiler mit Zählereinsatz kompl.
Регион	Tyrol
Вложки	стоманена табелка
Цвят	RAL 7035
Ширина в модули	1
HU	21
Релса за електромери	1
място за електромер	1
Степен на защита - IP	IP20C
последващ електромер	1
Преден панел	ламарина
Основно описание	Табло
Ширина на модула	13

Таблица с артикули

Описание	Тегло на медта (kg/km)	Артикулен No.
Masken-Zählerverteiler 1M-21E/TIR 1ZP, H1010B330T200mm 1 място за електромер, 1 Релса за електромери, 1 последващ електромер, 13 Широчина на модула, Преден панел ламарина, Tyrol		IL153121TS
Акcesoари		
Странична рамка за основа 200mm, за мод. табла (комплект)		IL091120
Маркиращи ленти 10C+K 1m		BK002401
Покриваща лайстна, сива, 1000 mm Empty space cover, 45mm cap dimension, 1 m long, the cover can be shortened individually.		IL900251
Plug-in counter bar 50A for Vienna, Tyrol and Styria Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816
Meter Connection Terminal 50A for Czech Republic, wired 1,8m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824