


Данни за артикула: IL153328GS

# Masken-Zählerverteiler 3M-28E/STMK 3ZP, H1335B760T200mm

3 място за електромер, 1 Релса за електромери, 4 последващ електромер, 132  
Широчина на модула, Преден панел ламарина, Styria

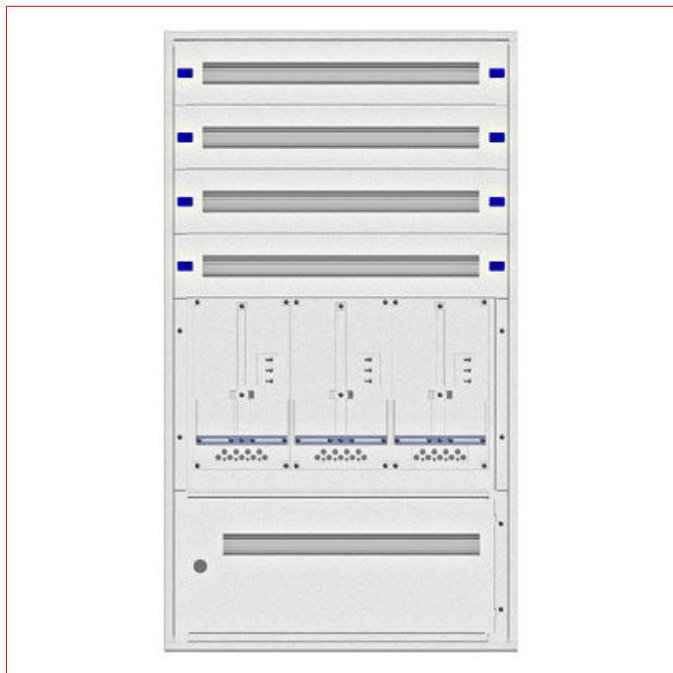

## SCHRACK-Info

- Modular aufgebauter Maskenverteiler mit PVC-Rückwand ohne Tür
- Material: 1 mm pulverbeschichtetes Stahlblech
- Phosphatierter, kunststoffpulverbeschichteter Stahlblechverteiler geprüft und zertifiziert nach EN 62208:2011 und EN 60529:1991, Schutzklasse I für TT/TN und IT Netzform geeignet, schutzisoliert nach ÖVE-IM 12
- Die Ausführung des Vorzählerteils besteht aus einer Vorzähler-Türe mit Ausprägung für EVU-Schlosseinbau und Ausschnitt für Vorzählersicherungsautomaten inklusive montierter Hutschiene
- Bemessungsspannung  $U_e$ : 230/400V/50Hz
- Bemessungsisolationsspannung  $U_i$ : 1000V
- Bemessungsstoßspannungsfestigkeit  $U_{imp}$ : 6kV
- Bemessungskurzzeitstromfestigkeit  $I_{cw}$ : 25kA / 1s
- Bemessungsstoßstromfestigkeit  $I_{pk}$ : 54kA
- Bedingter Bemessungskurzschlussstrom  $I_{cc}$ : 25kA
- Schutzklasse: I
- EMV: EMV Umgebung 1
- komplett bestückt und vorverdrahtet auf Anfrage



## Технически данни

|                        |                                           |
|------------------------|-------------------------------------------|
| Нето ширина (mm)       | 760,00                                    |
| Нето височина (mm)     | 1.335,00                                  |
| Дълбочина (mm)         | 200,00                                    |
| EAN                    | 9004840634969                             |
| Разсейвана мощност (W) | -407,00                                   |
| Тип                    | Masken-Verteiler mit Zählereinsatz kompl. |
| Регион                 | Styria                                    |
| Вложки                 | стоманена табелка                         |
| Цвят                   | RAL 7035                                  |
| Ширина в модули        | 3                                         |
| HU                     | 28                                        |
| Релса за електромери   | 1                                         |
| място за електромер    | 3                                         |
| Степен на защита - IP  | IP20C                                     |
| последващ електромер   | 4                                         |
| Преден панел           | ламарина                                  |
| Основно описание       | Табло                                     |
| Ширина на модула       | 132                                       |

## Таблица с артикули

| Описание                                                                                                                                                                              | Тегло на медта (kg/km) | Артикулен No. |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|---------------|
| Masken-Zählerverteiler 3M-28E/STMK 3ZP, H1335B760T200mm<br>3 място за електромер, 1 Релса за електромери, 4 последващ електромер, 132 Ширина на модула, Преден панел ламарина, Styria |                        | IL153328GS    |
| <b>Аксесоари</b>                                                                                                                                                                      |                        |               |
| Странична рамка за основа 200mm, за мод. табла (комплект)                                                                                                                             |                        | IL091120      |
| Предна рамка за основа, за модулни табла, ширина 760 mm                                                                                                                               |                        | IL091030      |
| Маркиращи ленти 10C+K 1m                                                                                                                                                              |                        | BK002401      |
| Покриваща лайстна, сива, 1000 mm<br>Empty space cover, 45mm cap dimension, 1 m long, the cover can be shortened individually.                                                         |                        | IL900251      |

## Таблица с артикули

| Описание                                                                                                                                                                                                                                                                                       | Тегло на медта (kg/km) | Артикулен No. |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|---------------|
| <b>Акcesoари</b>                                                                                                                                                                                                                                                                               |                        |               |
| Plug-in counter bar 50A for Vienna, Tyrol and Styria                                                                                                                                                                                                                                           |                        |               |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 |                        | IL900189      |
| Plug-in counter bar 50A, PU = 64 Pieces                                                                                                                                                                                                                                                        |                        |               |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 |                        | IL900189-A    |
| Plug-in counter bar pins 63A, 44mm, PU=7 pieces                                                                                                                                                                                                                                                |                        | IL900190      |
| Cover for Plug-in counter bars                                                                                                                                                                                                                                                                 |                        | IL900191      |
| Meter Connection Terminal 50A for Czech Republic, wired 1,3m                                                                                                                                                                                                                                   |                        |               |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 975                    | IL901816      |
| Meter Connection Terminal 50A for Czech Republic, wired 1,8m                                                                                                                                                                                                                                   |                        |               |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1350                   | IL901820      |
| Meter Connection Terminal 50A for Czech Republic, wired 2,3m                                                                                                                                                                                                                                   |                        |               |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1725                   | IL901824      |