


Данни за артикула: IL160424WS

Aufputz-Zählerverteiler 4A-24E/WIEN 4ZP, H1195B1030T250mm

4 място за електромер, 1 Релса за електромери, 3 последващ електромер, 135
Широчина на модула, Преден панел ламарина, Vienna

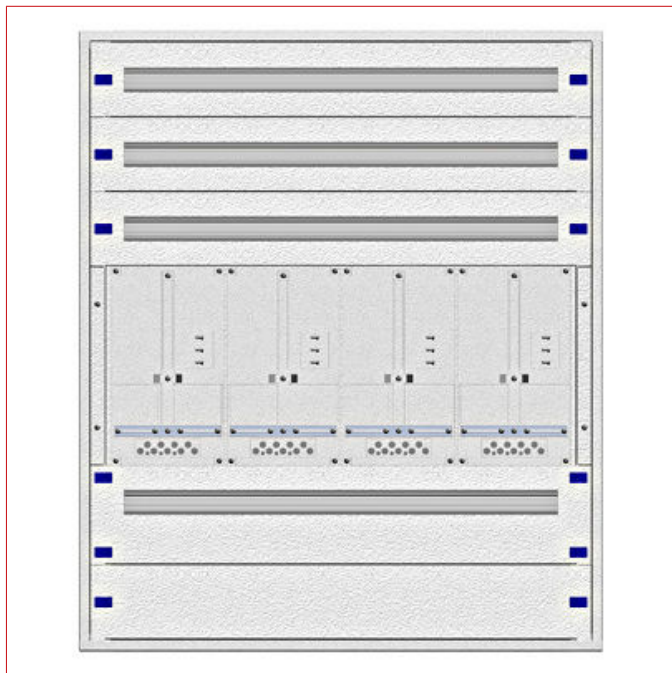

SCHRACK-Info

- Modular aufgebauter Aufputzverteiler mit Tür und PVC-Rückwand
- Material: 1,25mm pulverbeschichtetes Stahlblech
- Phosphatierter, kunststoffpulverbeschichteter Stahlblechverteiler geprüft und zertifiziert nach EN 62208:2011 und EN 60529:1991, Schutzklasse I für TT/TN und IT Netzform geeignet, schutzisoliert nach ÖVE-IM 12
- Standardmäßig mit Kunststoff-Drehriegelverschluss mit Doppelbartsperr
- Die Ausführung des Vorzählerteils besteht aus einer Gerätefrontplatte mit 45mm Geräteausschnitt oder einer plombierbaren Abdeckung mit montierter Alu/HC Schiene oder SHC-Schiene
- Bemessungsspannung U_e : 230/400V/50Hz
- Bemessungsisolationsspannung U_i : 1000V
- Bemessungsstoßspannungsfestigkeit U_{imp} : 6kV
- Bemessungskurzzeitstromfestigkeit I_{cw} : 25kA / 1s
- Bemessungsstoßstromfestigkeit I_{pk} : 54kA
- Bedingter Bemessungskurzschlussstrom I_{cc} : 25kA
- Schutzklasse: I
- EMV: EMV Umgebung 1
- komplett bestückt und vorverdrahtet auf Anfrage
-



Технически данни

Нето ширина (mm)	1.030,00
Нето височина (mm)	1.195,00
Дълбочина (mm)	250,00
EAN	9004840629927
Разсейвана мощност (W)	-505,00
Тип	AP-Verteiler mit Zählereinsatz kompl.
Регион	Vienna
Вложки	стоманена табелка
Цвят	RAL 7035
Ширина в модули	4
HU	24
Релса за електромери	1
място за електромер	4
Степен на защита - IP	IP20C
последващ електромер	3
Преден панел	ламарина
Основно описание	Табло
Ширина на модула	135

Таблица с артикули

Описание	Тегло на медта (kg/km)	Артикулен No.
Aufputz-Zählerverteiler 4A-24E/WIEN 4ZP, H1195B1030T250mm 4 място за електромер, 1 Релса за електромери, 3 последващ електромер, 135 Ширина на модула, Преден панел ламарина, Vienna		IL160424WS
Акcesoари		
Комплект странични панели за основа (2 бр.), 250mm Подходящи за табла тип IP54 и IP20-C		IL091125
Предна рамка за основа за Modul 2000, ширина 4 redesigned U-Profile Depth 8mm, 2mm Sheet Steel		IL091400-S
КЛЮЧАЛКА 61005 with 1 key		IL900200-F
Ключалка H36000 с 2 ключа		IL900202-F

Таблица с артикули

Описание	Тегло на медта (kg/km)	Артикулен No.
Акcesoари		
Flange with 2 push through flanges, size 2, 426x130x18mm W=426 H=130 D=15 mm, Cable glands: 28x 13 mm, 16x 17 mm and 4x 30 mm		IL900102
Гумирана плоча за кабелни вх., IP20C, 18 входа - 18 до 30mm за IL001/006/009/036, ширина 2,3,4,5		IL900105
Скоби за монтаж на стена, за Modul 2000		IL900020-F
Маркиращи ленти 10C+K 1m		BK002401
Покриваща лайстна, сива, 1000 mm Empty space cover, 45mm cap dimension, 1 m long, the cover can be shortened individually.		IL900251
Ключалка цилиндрична Z		IL900201-F
Plug-in counter bar 50A for Vienna, Tyrol and Styria Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816
Meter Connection Terminal 50A for Czech Republic, wired 1,8m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824