


Данни за артикула: IL162545GS

# Aufputz-Zählerverteiler 5A-45G/STMK 10ZP, H2160B1230T250mm

10 място за електромер, 2 Релса за електромери, 4 последващ електромер, 228  
Широчина на модула, Преден панел ламарина, Styria

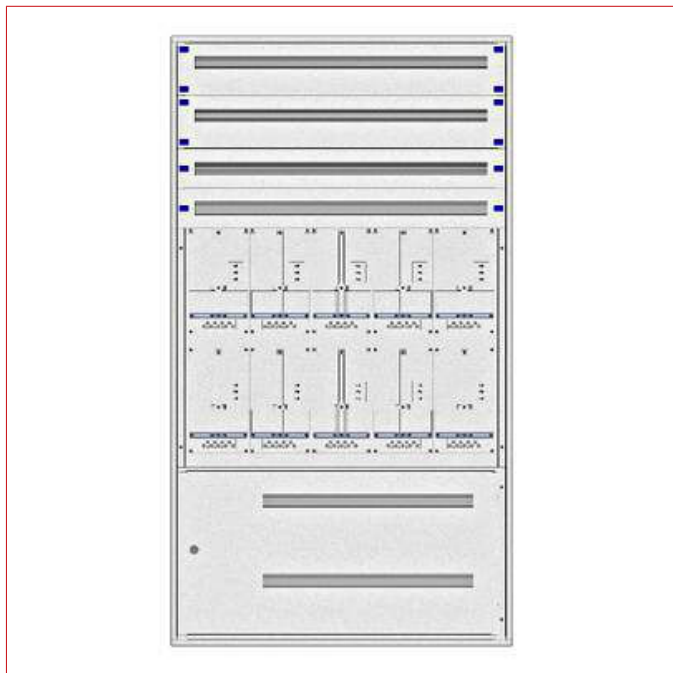

## SCHRACK-Info

- Modular aufgebauter Aufputzverteiler mit Tür und PVC-Rückwand
- Material: 1,25mm pulverbeschichtetes Stahlblech
- Phosphatierter, kunststoffpulverbeschichteter Stahlblechverteiler geprüft und zertifiziert nach EN 62208:2011 und EN 60529:1991, Schutzklasse I für TT/TN und IT Netzform geeignet, schutzisoliert nach ÖVE-IM 12
- Standardmäßig mit Kunststoff-Drehriegelverschluss mit Doppelbartsperr
- Die Ausführung des Vorzählerteils besteht aus einer Vorzähler-Türe mit Ausprägung für EVU-Schlosseinbau und Ausschnitt für Vorzählersicherungsautomaten inklusive montierter Hutschiene
- Bemessungsspannung  $U_e$ : 230/400V/50Hz
- Bemessungsisolationsspannung  $U_i$ : 1000V
- Bemessungsstoßspannungsfestigkeit  $U_{imp}$ : 6kV
- Bemessungskurzzeitstromfestigkeit  $I_{cw}$ : 25kA / 1s
- Bemessungsstoßstromfestigkeit  $I_{pk}$ : 54kA
- Bedingter Bemessungskurzschlussstrom  $I_{cc}$ : 25kA
- Schutzklasse: I
- EMV: EMV Umgebung 1
- komplett bestückt und vorverdrahtet auf Anfrage



## Технически данни

|                        |                                       |
|------------------------|---------------------------------------|
| Нето ширина (mm)       | 590,00                                |
| Нето височина (mm)     | 2.160,00                              |
| Дълбочина (mm)         | 250,00                                |
| EAN                    | 9004840641738                         |
| Разсейвана мощност (W) | -986,00                               |
| Тип                    | AP-Verteiler mit Zählereinsatz kompl. |
| Регион                 | Styria                                |
| Вложки                 | стоманена табелка                     |
| Цвят                   | RAL 7035                              |
| Ширина в модули        | 5                                     |
| HU                     | 45                                    |
| Релса за електромери   | 2                                     |
| място за електромер    | 10                                    |
| Степен на защита - IP  | IP20C                                 |
| последващ електромер   | 4                                     |
| Преден панел           | ламарина                              |
| Основно описание       | Табло                                 |
| Ширина на модула       | 228                                   |

## Таблица с артикули

| Описание                                                                                                                                                                                                                                                                                                                                          | Тегло на медта (kg/km) | Артикулен No. |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|---------------|
| Aufputz-Zählerverteiler 5A-45G/STMK 10ZP, H2160B1230T250mm<br>10 място за електромер, 2 Релса за електромери, 4 последващ електромер, 228 Широчина на модула, Преден панел ламарина, Styria                                                                                                                                                       |                        | IL162545GS    |
| <b>Акcesoари</b>                                                                                                                                                                                                                                                                                                                                  |                        |               |
| Комплект странични панели за основа (2 бр.), 250mm<br>Подходящи за табла тип IP54 и IP20-C                                                                                                                                                                                                                                                        |                        | IL091125      |
| Предна рамка за основа за Modul 2000, широчина 5<br>redesigned U-Profile Depth 8mm, 2mm Sheet Steel                                                                                                                                                                                                                                               |                        | IL091500-S    |
| КЛЮЧАЛКА 61005<br>with 1 key                                                                                                                                                                                                                                                                                                                      |                        | IL900200-F    |
| Ключалка H36000 с 2 ключа                                                                                                                                                                                                                                                                                                                         |                        | IL900202-F    |
| Flange with 2 push through flanges, size 2, 426x130x18mm<br>W=426 H=130 D=15 mm, Cable glands: 28x 13 mm, 16x 17 mm and 4x 30 mm                                                                                                                                                                                                                  |                        | IL900102      |
| Гумирана плоча за кабелни вх., IP20C, 18 входа - 18 до 30mm<br>за IL001/006/009/036, широчина 2,3,4,5                                                                                                                                                                                                                                             |                        | IL900105      |
| Скоби за монтаж на стена, за Modul 2000                                                                                                                                                                                                                                                                                                           |                        | IL900020-F    |
| Маркиращи ленти 10C+K 1m                                                                                                                                                                                                                                                                                                                          |                        | BK002401      |
| Покриваща лайстна, сива, 1000 mm<br>Empty space cover, 45mm cap dimension, 1 m long, the cover can be shortened individually.                                                                                                                                                                                                                     |                        | IL900251      |
| Ключалка цилиндрична Z                                                                                                                                                                                                                                                                                                                            |                        | IL900201-F    |
| Plug-in counter bar 50A for Vienna, Tyrol and Styria<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm², flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019         |                        | IL900189      |
| Plug-in counter bar 50A, PU = 64 Pieces<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm², flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019                      |                        | IL900189-A    |
| Plug-in counter bar pins 63A, 44mm, PU=7 pieces                                                                                                                                                                                                                                                                                                   |                        | IL900190      |
| Cover for Plug-in counter bars                                                                                                                                                                                                                                                                                                                    |                        | IL900191      |
| Meter Connection Terminal 50A for Czech Republic, wired 1,3m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm², flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 975                    | IL901816      |
| Meter Connection Terminal 50A for Czech Republic, wired 1,8m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm², flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1350                   | IL901820      |

## Таблица с артикули

| Описание                                                                                                                                                                                                                                                                                       | Тегло на медта (kg/km) | Артикулен No. |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|---------------|
| <b>Акcesoари</b>                                                                                                                                                                                                                                                                               |                        |               |
| Meter Connection Terminal 50A for Czech Republic, wired 2,3m                                                                                                                                                                                                                                   |                        |               |
| Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1725                   | IL901824      |