


Данни за артикула: IL198295-A

# Metering insert 2-45M compl. 6 cou. pl. front pl. st. STMK

Frontblende Stahlblech

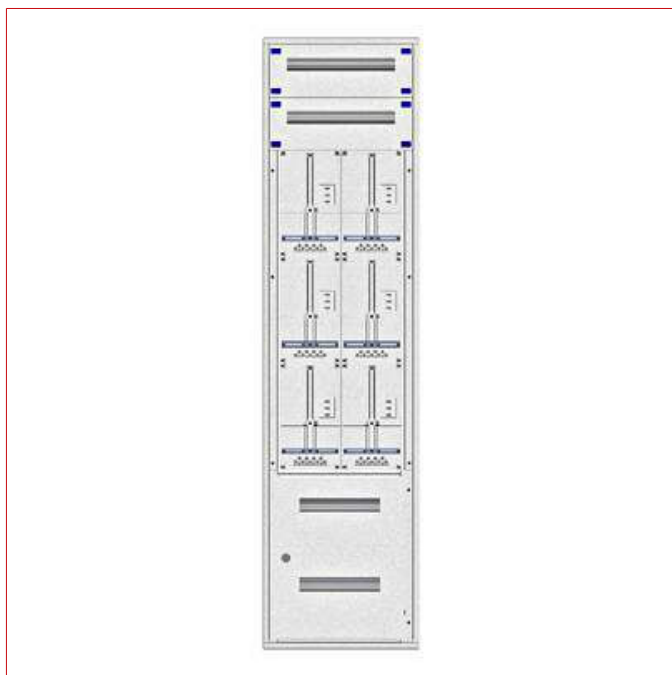

## Технически данни

|                      |                        |
|----------------------|------------------------|
| Нето ширина (mm)     | 500,00                 |
| Нето височина (mm)   | 2.070,00               |
| Дълбочина (mm)       | 102,00                 |
| EAN                  | 9004840967371          |
| Тип                  | Zählerverteilereinsatz |
| Регион               | Styria                 |
| Вложки               | пластмасова табелка    |
| Цвят                 | RAL 7035               |
| Ширина в модули      | 2                      |
| HU                   | 45                     |
| Релса за електромери | 3                      |
| място за електромер  | 6                      |
| последващ електромер | 2                      |
| Преден панел         | ламарина               |
| Основно описание     | Insert                 |

## Таблица с артикули

| Описание                                                                                                                                                                                                                                                                                                                                                       | Тегло на медта (kg/km) | Артикулен No. |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|---------------|
| Metering insert 2-45M compl. 6 cou. pl. front pl. st. STMK<br>Frontblende Stahlblech                                                                                                                                                                                                                                                                           |                        | IL198295-A    |
| <b>Акcesoари</b>                                                                                                                                                                                                                                                                                                                                               |                        |               |
| Earthing kit 300 mm/Yf6 <sup>2</sup> assembled with all nuts, washer,...                                                                                                                                                                                                                                                                                       |                        | IL900099      |
| Plug-in counter bar 50A for Vienna, Tyrol and Styria<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019         |                        | IL900189      |
| Plug-in counter bar 50A, PU = 64 Pieces<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019                      |                        | IL900189-A    |
| Plug-in counter bar pins 63A, 44mm, PU=7 pieces                                                                                                                                                                                                                                                                                                                |                        | IL900190      |
| Cover for Plug-in counter bars                                                                                                                                                                                                                                                                                                                                 |                        | IL900191      |
| Meter Connection Terminal 50A for Czech Republic, wired 1,3m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 975                    | IL901816      |
| Meter Connection Terminal 50A for Czech Republic, wired 1,8m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1350                   | IL901820      |
| Meter Connection Terminal 50A for Czech Republic, wired 2,3m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1725                   | IL901824      |