

Данни за артикула: INSNK022--

Допълнителен контакт NO, за 3P INSE, 80A

Snap-on N-contact for retrofitting a 3-pole switch to a 4-pole switch. Can only be used with an 80A INSE switch. Not for use with INSR, INSP, and INSA!




Технически данни

Версия	аксесоари
Номинален ток (A)	80
Полюси	1
Монтаж	surface mounting
Standard	IEC 60947, EN 60947, VDE 0667
Rated insulation voltage [Ui] (V)	690
Rated impulse withstand voltage [Uimp] (V)	6000
Rated short-time withstand current Icw	1000
Rated conditional short-circuit-current	10kA @ 440V / 6kA @ 690V
Short-circuit protection maximum fuse	80
Честота (Hz)	50/60
Operating Current	AC-21A - 690V - 80A AC-23A - 690V - 22A AC-23A - 400V - 43A AC-3 - 400V - 43A AC-3 - 690V - 22A

Технически данни - продължение

Switching Capacity	AC-23A - 400V - 30kW AC-23A - 690V - 22kW AC-3 - 690V - 18.5kW AC-3 - 400V - 22kW
According to UL 508 / CSA	
Начин на свързване	UL/CSA - AWG 14-6
Оперативно напрежение AC (V)	600
Thermal rated continuous current (A)	80
Active Power	3x240VAC - 15Hp 3x600VAC - 50Hp 3x480VAC - 40Hp 1x120VAC - 10Hp
Свързване	
Conventional thermal current Ith (A)	80
Tightening torque (Nm)	2,50
Connection cross-section, multi-wire (mm ²)	2,5-35
Connection cross section, single wire (mm ²)	2,5-35
Connection cross-section, flexible wire with ferrule (mm ²)	2,5-16
Retrofit contacts	
Neutral conductor contacts	Neutral conductor early-make, late-break design (closes before and opens after the phase conductors to prevent voltage displacement) As soon as a 3-pole switch is converted to a 4-pole switch using a neutral conductor contact, NO additional auxiliary contact is permitted to be attached to the neutral conductor contact! For further information, see the data sheet for the respective switch.
Работна температура	-25°C to +55°C
Mechanical durability	100000 switching cycles
Power loss per pole (W)	5,50
Protection against direct contact	finger-proof and back-of-hand-proof according to VDE 0106 Part 100
Степен на защита - IP	IP65 (front), IP10 (output terminals), IP20 (supply terminals with terminal cover and Cable cross-section bigger than 6mm ²)
Lockable	No
Нето дължина (mm)	102,00
Нето широчина (mm)	25,00
Нето височина (mm)	47,00
Мин. околна температура (°C)	-25
Макс. околна температура (°C)	55

Чертеж: Допълнителен контакт NO, за 3P INSE, 80A

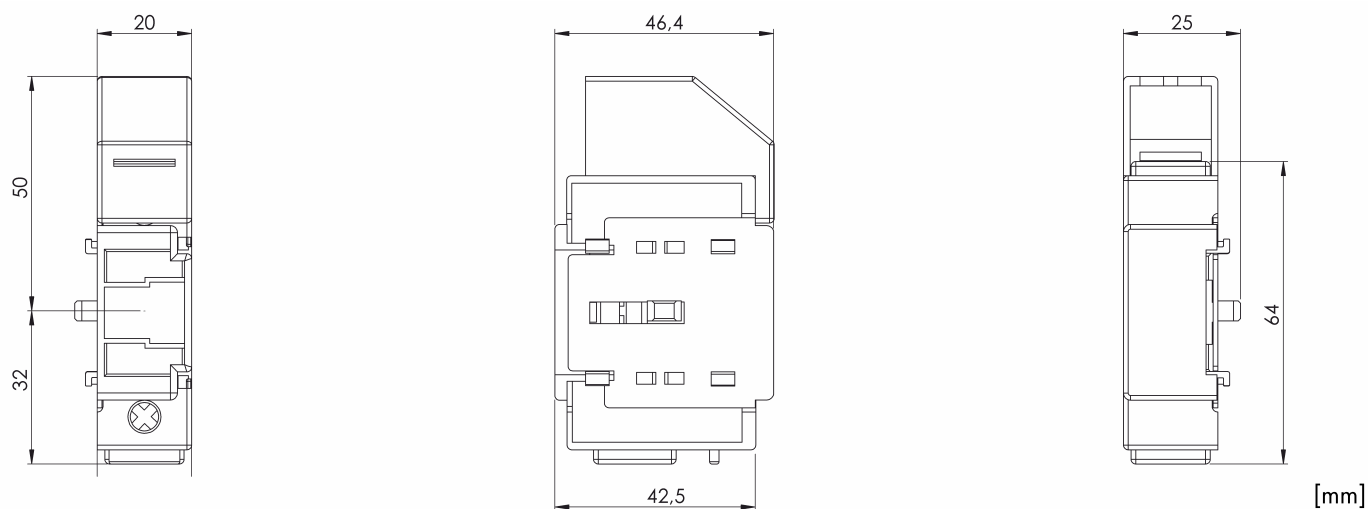

Описание	Артикулен No.
----------	---------------

Допълнителен контакт NO, за 3P INSE, 80A

Snap-on N-contact for retrofitting a 3-pole switch to a 4-pole switch. Can only be used with an 80A INSE switch. Not for use with INSNK022 INSR, INSP, and INSA!