

Данни за артикула: IUKTS9041-

Климатик 870W, външен монтаж към табло, Серия DTS

230V, IP54, RAL 7035



SCHRACK-Info

General:

- Cooling unit for outer mounting on the door or side (=DTS)
- Simple and fast mounting with brackets
- Small mounting area, suitable for small electrical enclosures and larger electrical enclosures for the cooling of hot spots
- Compact design, perfect for flat enclosures, control consoles and operating units
- Technical design with a standard controller
- Color: RAL 7035 (Light grey)

IUKTS9041:

- Cooling performance: 870W
- Rated voltage: 230V
- Can be used from door widths of 400mm
- Large distance between intake and exhaust vents, safe circulation within the electrical enclosure due to long passage of air, therefore hot spots are eliminated
- Integrated fault and door contact
- Type of connection: Spring-type terminal included with plug
- Degree of protection IP54: Towards the enclosure
- Degree of protection IP34: Towards the surroundings




Технически данни

Нето ширина (mm)	380,00
Нето височина (mm)	604,00
Дълбочина (mm)	231,00
Нето тегло (kg)	29,50
Мин. околна температура (°C)	15
Макс. околна температура (°C)	55
Степен на защита - IP	IP54
Клас на защита	I
Номинално напрежение	230V-AC
Тип	климатик
мощност на охлаждане (W)	870


Таблични файлове: Климатик 870W, външен монтаж към табло, Серия DTS

Daten		Einheit	IUKTS9041
Nennspannung +10%		Hz V	AC 50 / 60 230
Kälteleistung nach EN 14511	L35/L35:	W	870
	L35/L50:		580
Leistungsaufnahme	L35/L35:	W	524 / 634
Stromaufnahme	L35/L35:	A	3,06 / 3,34
Einschaltstrom	L35/L35:	A	22,16 / 24,15
Luftvolumenstrom freiblasend	intern	m³/h	300
	extern	m³/h	300
Absicherung T		A	10
Anschlussart			Federzugklemme an beigefügtem Stecker
Geräuschpegel nach EN ISO 3741		dB (A)	< 63
Umgebungstemperatur		°C (°F)	+15 bis +55 (+59 bis +131)
Regelbereich (einstellbar)		°C (°F)	+25 bis +45 (+77 bis +113); werkseitige Einstellung +35 (+95)
Kältemittel	R134a	g	400
Kondensatabscheidung			Kondensatablauf; integrierte Kondensatverdunstung optional
Schutzart nach EN 60529	IP54		gegenüber dem Schaltschrank, bei bestimmungsgemäßigem Einsatz
	IP34		gegenüber der Umgebung, bei bestimmungsgemäßigem Einsatz
Bauweise	Gehäuse		Stahlblech verzinkt
	Haube		verzinkt, elektrostatisch pulverbeschichtet (200 °C)
Abmessungen		[mm]	H=604, B=380, T=231
Nettogewicht		[kg]	29,5

Cooling Capacity Performance Curves

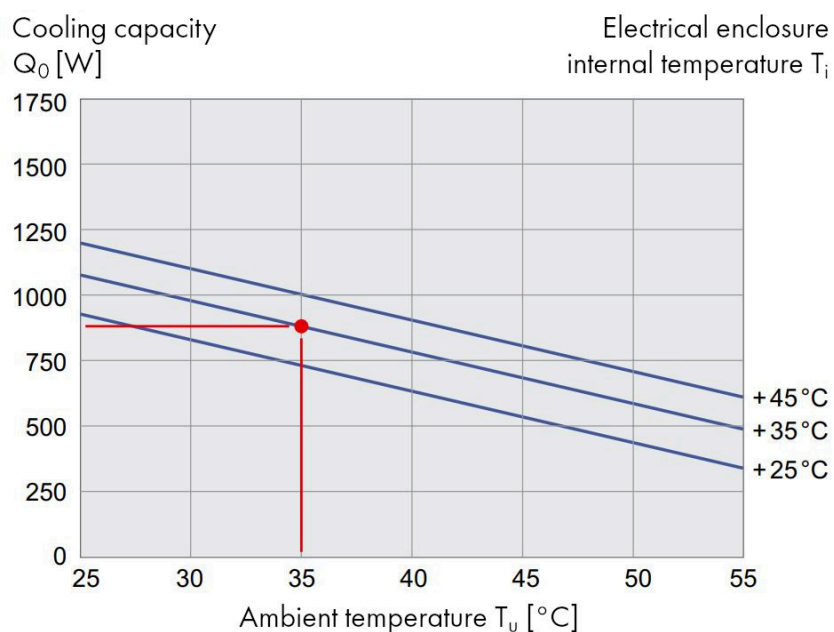

Dimensions and Cutout IUKTS9041

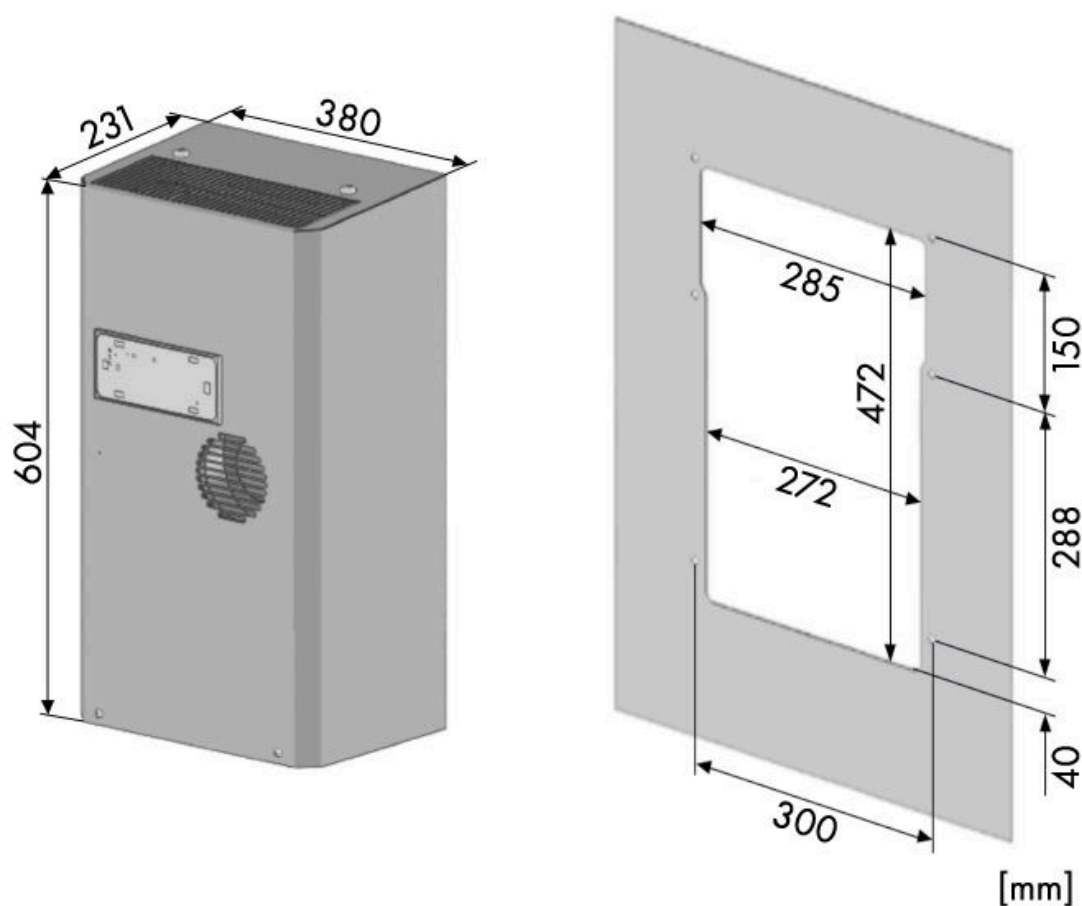

Описание	Артикулен No.
Климатик 870W, външен монтаж към табло, Серия DTS 230V, IP54, RAL 7035	IUKTS9041