

Данни за артикула: KCOX201060

Табло за монтаж на открито, 1 вр., IP55, 2000x1000x600mm

made of stainless steel, with exhaust filter, hose-proof cover and mounting plate



SCHRACK-Info

- **Material :**
 - Frame: 1,5 mm stainless steel
 - Doors: 2 mm stainless steel
 - Rear panel: 1.5 mm stainless steel
 - Roof panel: 1.5 mm stainless steel
- **Mounting plate :** 3 mm galvanised sheet steel. Double folded, mounted in the enclosure, fully adjustable in depth in 25 mm increments with depth adjustment brackets ACMPD002. As insertion aid of the mounting plate we recommend the use of slide-in rails ACCLT600 (for depth 600 mm). The slide-in rails are inserted in the floor, after sliding and fixing of the mounting plate they can be removed and reused in the next enclosure
- **Bottom plates :** 1 mm galvanised sheet steel, divided in two parts
- **Frame :** Folded and seam welded reversed open profile with 25 mm hole pattern according to DIN 43660. Including inside circumferential hole pattern
- **Door :** On single door enclosures, the door is mounted on four double-sided hinges allowing left- or right-hand opening. On double door enclosures, hinges are not reversible. Doors for left-hand opening have to be ordered separately. All door panels include the door mounting frame with 25 mm hole pattern. The left Z-wing is locked separately with an inner three-point lock
- **Lock :** Four-point rod lock with push-pull handle with spring adjustment and 5 mm DIN double-bit key lock (DDB), does not slide inward. The standard lock can be exchanged for profile half cylinder (DIN cylinder) and other inserts from the range of accessories. Double doors are designed with a left-side inner pivot lever

- **Rear panel** : Mounted with M6 torx screws. Replacement against additional door from the back side is possible. For 1600 mm wide enclosures the rear panel is divided
- **Roof panel** : Removable
- **Earthing** : All panels are earthed through their fittings and are equipped with a separate earthing stud
- **Degree of protection** : Single door and double door IP55
- **Impact resistance** : IK10
- **Finish** : Textured powder coating with UV protection
- **Color** : RAL7035 (Light grey)
- **Delivery includes** : Enclosure with door, rear panel, closed roof panel, bottom plates and mounting plate. Delivered on a pallet.



Технически данни

Нето широчина (mm)	1.000,00
Нето височина (mm)	2.000,00
Дълбочина (mm)	600,00
Нето тегло (kg)	238,00
Мин. околна температура (°C)	-40
Макс. околна температура (°C)	80
Степен на защита - IP	IP55
Клас на защита	I
Материал	Stainless steel 1.4016 (AISI 430)
Цвят	RAL 7035 (Light grey)
Широчина (mm)	1000
Височина (mm)	2000
Дълбочина (mm)	600
Дебелина на материала на таблото (mm)	1
Монтажна плоча	galvanized sheet steel 3mm
Mounting plate wall thickness (mm)	3
Mounting plate width (mm)	897
Mounting plate height (mm)	1891
Дебелина на стената на вратата (mm)	2
Брой долни плочи	2
Load capacity per door (kg)	100
Брой врати	1
Bottom plates width (mm)	857
Roof panel thickness (mm)	1,50
Rear panel thickness (mm)	1,50
Corrosion class	C3-M
Тип	Compact enclosure
Mounting Plate Load Capacity (kg)	700
Разсейвана мощност (W)	-914,00

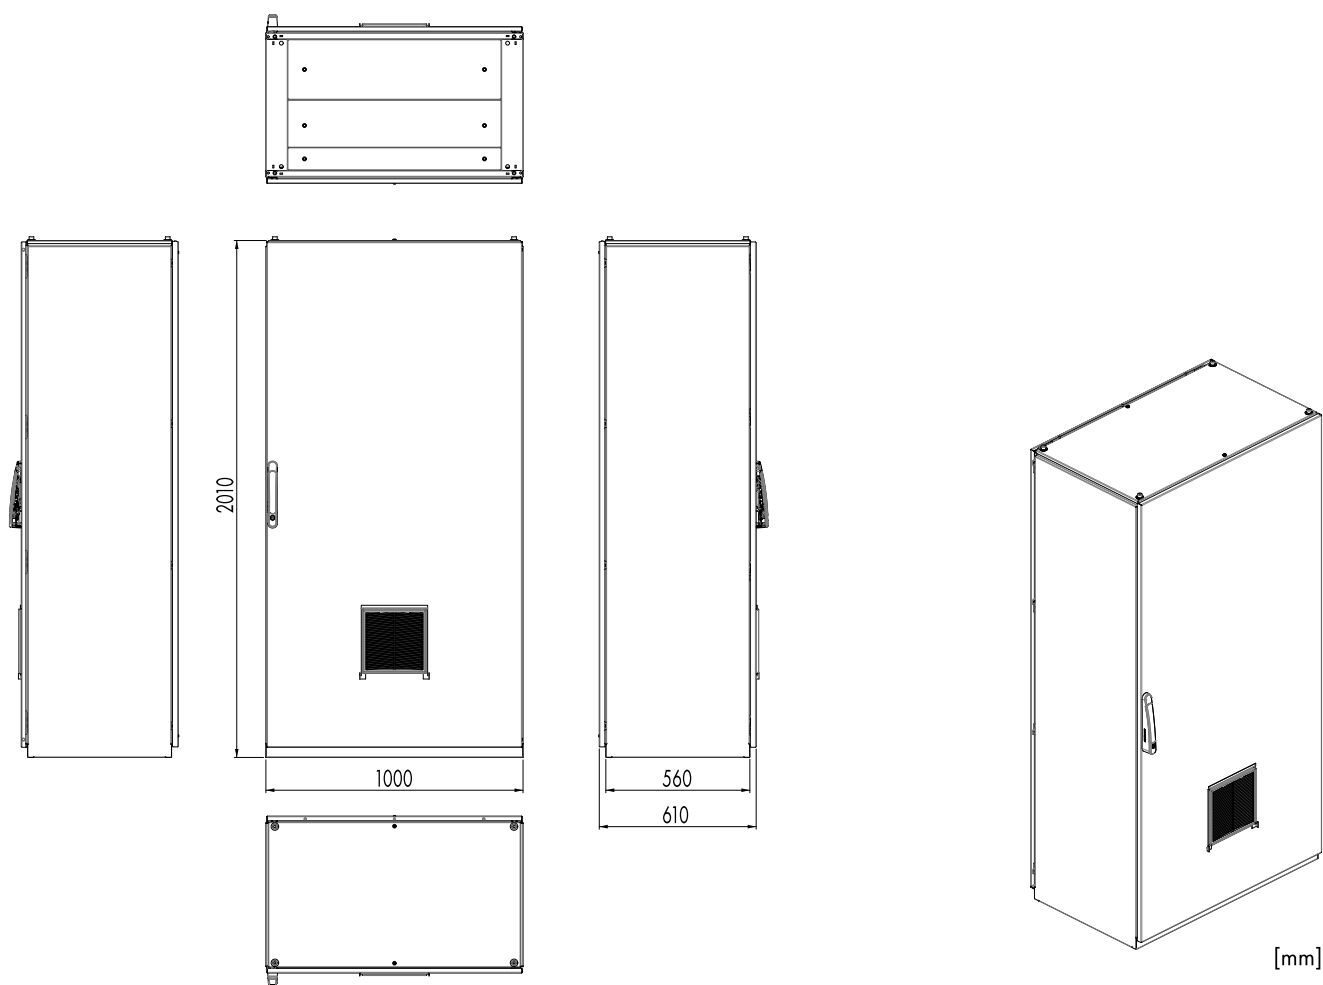
Чертеж: Табло за монтаж на открито, 1 вр., IP55, 2000x1000x600mm

Таблица с артикули

Описание	Артикулен No.
Табло за монтаж на открито, 1 вр., IP55, 2000x1000x600mm made of stainless steel, with exhaust filter, hose-proof cover and mounting plate	KCOX201060
Акcesoари	
комплект преден и заден панел за основа st. steel 1000x100mm PU=2 pieces, RAL7046 (Telegrey 2)	KCSOBX1001
Комплект странични панели за основа, st. steel, 600x100mm with corner parts, preassembled, RAL7046 (Telegrey 2)	KCSOTX0601
козирка за табло, с вентилатор с филтър 540m ³ /h, 1000x600mm made of aluminum, RAL7035, suitable for stainless steel enclosure KCIX201060 and outdoor enclosure KCOX201060	KCRC1060F
Козирка за табло, с решетка с филтър, 1000x600mm made of aluminum, RAL7035, suitable for stainless steel enclosure KCIX201060 and outdoor enclosure KCOX201060	KCRC1060E
Водещи релси за монтажни плочи за табла с дълбочина 600mm за серия AC и KC, комплект=1 (2 броя)	ACCLT600
Болтове M12 за повдигане на табла AC и KC (Компл. = 4 броя) Комплект = 4 броя	ACLE9301
Брава за табло AC/KC, черна, с пружинен механизъм Без ключалка	ACLSC502
Адаптер за ключалка полуцилиндър for push-pull handles of enclosure series AC, KC, AT and KT	ASLS2100
Адапторна плочка за бутон за табла AC/KC	ASLSS1537
Универсални гайки за профили, M6 (комплект = 10 броя)	ACCNM615
Монтажни винтове M6x16, в съответствие с ISO 7380 Комплект = 10 броя	ACCNK006
Универсални гайки за профили, M8 (комплект = 10 броя)	ACCNM815
Монтажни винтове M8x16, в съответствие с ISO 7380 Комплект = 10 броя	ACCNK008
Ключ за 5 mm патрон - стандартен 1 брой	DV903532