

Данни за артикула: KT161040--

Стоящ шкаф компактен, с монтажна плоча, IP65, 1600x1000x400mm

Метален, RAL7035, с монтажна плоча, с 4 точково заключване, с брава с въртяща ръкохватка



SCHRACK-Info

- **Material** : Corpus: 1.5 mm galvanised sheet steel. Doors: Single door and double door: 1.5 mm sheet steel. Rear panel: 1.2 mm sheet steel
- **Mounting plate** : 3 mm galvanised sheet steel. Double folded, mounted in the enclosure, fully adjustable in depth in 25 mm increments
- **Bottom plates** : 1.5 mm galvanised sheet steel, consists of
 - two-part bottom plate at depth 300 mm
 - three-part bottom plate at depths 400 and 500 mm
- **Frame** : Folded and seam welded reversed open profile with 25 mm hole pattern according to DIN 43660. Including integrated external hole pattern
- **Door** : On single door enclosures, the door is mounted on four double-sided hinges for right-hand opening (= hinged right). Doors for left-hand opening (= hinged left) have to be ordered separately. On double door enclosures, hinges are not reversible. All door panels include the door mounting frame with 25 mm hole pattern. The left Z-wing is locked separately with an inner three-point lock
- **Lock** : Four-point rod lock with push-pull handle with spring adjustment and half cylinder lock 5333 (identical key), does not slide inward. The standard lock can be exchanged for profile half cylinder (DIN cylinder) and other inserts from the range of accessories. Double doors are designed with a left-side inner pivot lever
- **Rear panel** : Mounted with M6 torx screws. Replacement against additional door from the back side is possible. For 1600 mm wide enclosures the rear panel is divided

- **Roof panel** : Removable
- **Earthing** : All panels are earthed through their fittings and are equipped with a separate earthing stud
- **Degree of protection** : Single door IP65 and double door IP54
- **Impact resistance** : IK10
- **Finish** : Textured powder coating
- **Color** : RAL7035 (Light grey)
- **Delivery includes** : Enclosure with door, rear panel, roof panel, bottom plates, mounting plate with fixing material for the nearest position of the rear panel and earthing studs. Delivered on a pallet with equal width as the enclosure



Технически данни

Нето ширина (mm)	1.000,00
Нето височина (mm)	1.600,00
Дълбочина (mm)	400,00
Нето тегло (kg)	131,20
Мин. околна температура (°C)	-20
Макс. околна температура (°C)	70
Степен на защита - IP	IP65
Клас на защита	I
Материал	ламарина
Цвят	RAL 7035 (Light grey)
Ширина (mm)	1000
Височина (mm)	1600
Дълбочина (mm)	400
Дебелина на материала на таблото (mm)	1,50
Монтажна плоча	galvanized sheet steel 3mm
Mounting plate wall thickness (mm)	3
Mounting plate width (mm)	888
Mounting plate height (mm)	1488
Дебелина на стената на вратата (mm)	1,50
Брой долни плочи	3
Load capacity per door (kg)	50
Брой врати	1
Bottom plates width (mm)	755
Load Capacity Roof Panel (kg)	40
Load Capacity Side Panel (kg)	90
Тип	Compact enclosure
Total Load Capacity (kg)	1200
Mounting Plate Load Capacity (kg)	500
Разсейвана мощност (W)	-761,00

Чертеж: Стоящ шкаф компактен, с монтажна плоча, IP65, 1600x1000x400mm

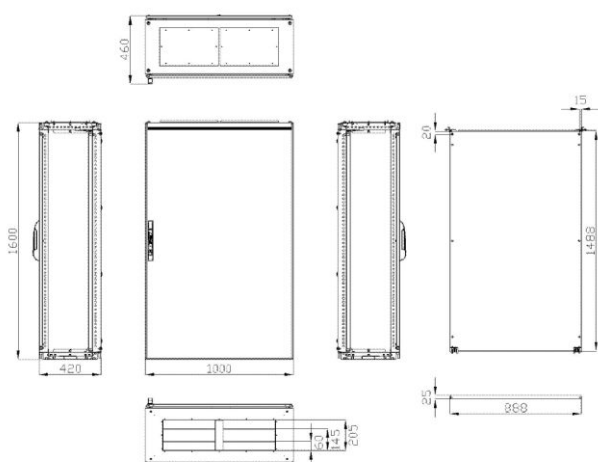


Таблица с артикули

Описание	Артикулен No.
Стоящ шкаф компактен, с монтажна плоча, IP65, 1600x1000x400mm	KT161040
Метален, RAL7035, с монтажна плоча, с 4 точково заключване, с брава с въртяща ръкохватка	
Акcesoари	
LED lighth for EC, infra (not available in this country)	IU006519CZ
Ъгли за панели за основа (4 броя), B=100 mm, ABS RAL7012	ATSOC104
Ъгли за панели за основа (4 броя), B=200 mm, ABS RAL7012	ATSOC204
Комплект панели за основа, странични (2бр.), 400/100 mm	ATSOT041
Комплект панели за основа, преден и заден, 1000/100mm RAL7012, компл. = 2 бр.	ATSOB101
Болтове M12 за повдигане на табла AC и KC (Компл. = 4 броя)	ACLE9301
Комплект = 4 броя	
Джоб за документи пластмасов A4	ASDRA400
DIN-релса за модулна апаратура, неразпробита, H=7.5mm, 2m	BK14004--B
Price per piece	
DIN-релса за модулна апаратура перфорирана 2m, цена за брой	BK14005--A
Цена за 2m	
DIN-релса за модулна апаратура, неразпробита, H=15mm, 2m	IL14035--A
DIN-rail high, unperforated, sendzimir zincd	
DIN-релса за модулна ап., с отвори 18x6.3mm, H=15mm, 2m	IL14037
Price per piece	