

Данни за артикула: LID17891--

38120P IP65 1xT8 LED Пюра 600mm PC/PC

Delivery without LED Tube



Технически данни

Цвят	Сиво
Материал	PC
Капак	PC opal
Оперативно напрежение AC (V)	100-240
Входно напрежение AC (V)	100-240
Брой лампи	1
Клас на защита	II
Степен на защита - IP	IP65
Устойчивост на удар	IK8

Чертеж: 38120P IP65 1xT8 LED Пура 600mm PC/PC

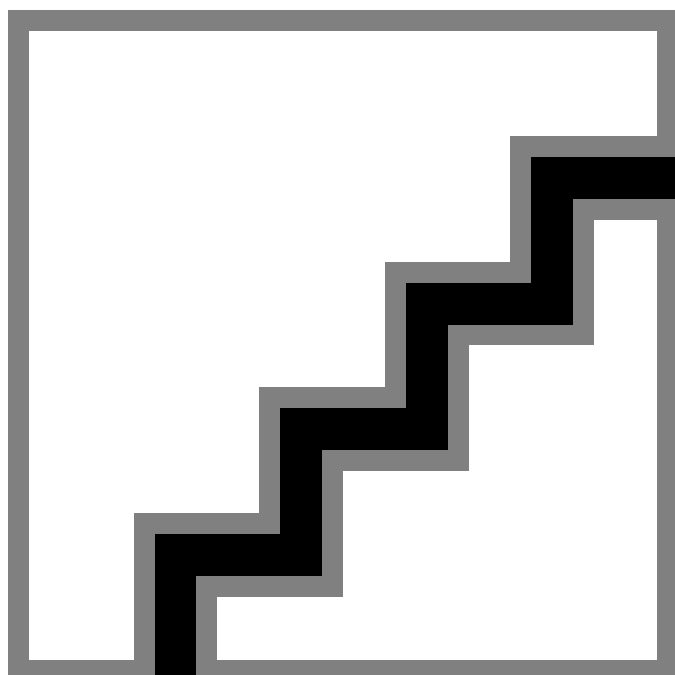


Таблица с артикули

Описание	Артикулен No.
38120P IP65 1xT8 LED Пура 600mm PC/PC Delivery without LED Tube	LI17891
Акcesoари	
RL-LED T8 18S G13 EM 7,3W 840 1100lm L-600mm T8 Retrofit lamp for CCG, replacement for 18W	LI43518307
RL-T8 18 6,3W 840 800lm G13 190° matt EM 600mm LED retrofit tube for operation with a magnetic ballast; including starter	LI43919875
RL-T8 18 8W 865 800lm G13 190° matt HF 600mm LED Retrofit Röhre with suitable ECG	LI43920135
RL-T8 18 8W 840 800lm G13 190° matt HF 600mm LED Retrofit Röhre with suitable ECG	LI43920136
RL-T8 18 S 7,3W 865 1100lm G13 190° matt EM 600mm LED retrofit tube for operation with a magnetic ballast; including starter	LI43719721
RL-T8 18 S 7,3W 840 1100lm G13 190° matt EM 600mm LED retrofit tube for operation with a magnetic ballast; including starter	LI43719720
RL-T8 18 S 7,5W 830 1000lm G13 190° matt HF 600mm LED Retrofit Röhre with suitable ECG	LI43719731
RL-T8 18 SP 6,7W 840 1100lm G13 190° matt EM 600mm LED retrofit tube for operation with a magnetic ballast	LI43719790

Таблица с артикули

Описание	Артикулен No.
Акcesoари	
RL-T8 18 SP 6,7W 865 1100lm G13 190° matt EM 600mm LED retrofit tube for operation with a magnetic ballast	L143719791
LED T8 NEO 18 6,9W 840 18,5 - 20,5V G13 160° matt 600mm T8 LED tube for external LED driver, LIOTDA4030	L143719848
LED T8 NEO 18 6,9W 865 18,5 - 20,5V G13 160° matt 600mm T8 LED tube for external LED driver, LIOTDA4030	L143719849
RL-T8 18 S 7,5W 840 1100lm G13 190° matt HF 600mm LED Retrofit Röhre with suitable ECG	L143720058
RL-T8 18 6,3W 830 760lm G13 200° мат EM 600mm LED retrofit tube for operation with a magnetic ballast	L143919882
RL-LED T8 18S G13 UN 7,5W 830 1000lm L-600mm LED retrofit tube for 230V direct connection, operation with a magnetic ballast or suitable ECG	L143518415
RL-T8 18 S MS 6,8W 840 1100lm G13 190° matt EM 600mm LED retrofit tube for operation with a magnetic ballast	L143719796