

Данни за артикула: LID17893--

38150P IP65 1xT8 LED Пюра 1500mm PC/PC

Delivery without LED Tube



Технически данни

Цвят	Сиво
Материал	PC
Капак	PC opal
Оперативно напрежение AC (V)	100-240
Входно напрежение AC (V)	100-240
Брой лампи	1
Клас на защита	II
Степен на защита - IP	IP65
Устойчивост на удар	IK8

Чертеж: 38150P IP65 1xT8 LED Пюра 1500mm PC/PC

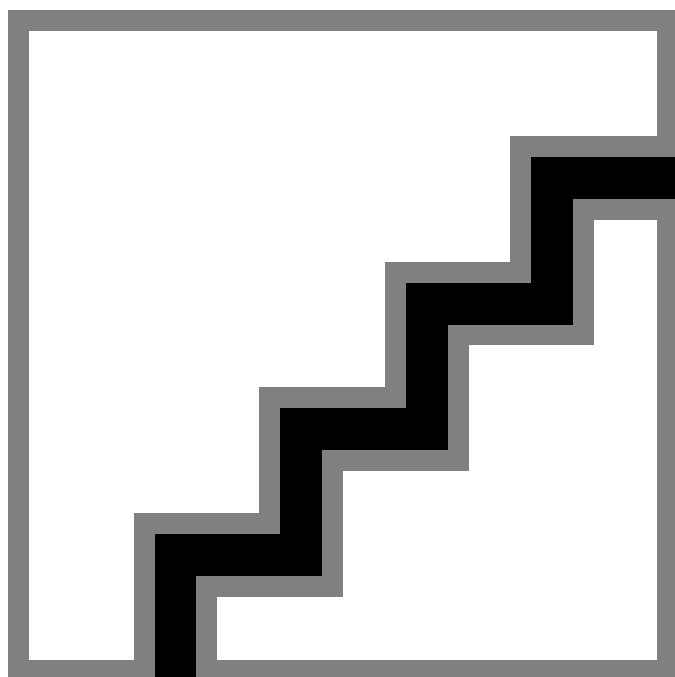


Таблица с артикули

Описание	Артикулен No.
38150P IP65 1xT8 LED Пюра 1500mm PC/PC Delivery without LED Tube	LI17893
Акcesoари	
RL-T8 58 18,3W 840 2200lm G13 190° мат EM 1500mm LED retrofit tube for operation with a magnetic ballast; including starter	LI43919879
RL-T8 58 24W 865 2800lm G13 190° matt UN 1500mm LED retrofit tube for 230V direct connection, operation with a magnetic ballast or suitable ECG; including starter	LI43920132
RL-T8 58 18,3W 865 2200lm G13 190° matt EM 1500mm LED retrofit tube for operation with a magnetic ballast; including starter	LI44020243
RL-T8 58 17,5W 830 1980lm G13 200° matt EM 1500mm LED retrofit tube for operation with a magnetic ballast; including starter	LI44119884
RL-LED T8 58S G13 EM 20,6W 840 3100lm L-1500mm LED retrofit tube for operation with a magnetic ballast; including starter	LI43719729
RL-T8 58 HO 23W 840 3700lm 230V G13 190° matt UN 1500mm LED retrofit tube for 230V direct connection, operation with a magnetic ballast or suitable ECG; including starter	LI43720052
RL-LED T8 S 20W 190° 840 3100lm G13 HF 60000h L=1,5m LED Retrofit Röhre with suitable ECG	LI43720060
RL-T8 58 S 20,6W 865 3100lm G13 190° matt EM 1500mm LED retrofit tube for operation with a magnetic ballast; including starter	LI43719730

Таблица с артикули

Описание	Артикулен No.
Акcesoари	
RL-T8 58 S 20W 830 2800lm G13 190° matt HF 1500mm LED Retrofit Röhre with suitable ECG	LI43719735
RL-T8 58 S 20W 865 3100lm G13 190° matt HF 1500mm LED Retrofit Röhre with suitable ECG	LI43719736
RL-T8 58 SP 18,8W 840 2100lm G13 190° matt EM 1500mm LED retrofit tube for operation with a magnetic ballast	LI43719794
RL-T8 58 HO 23W 865 3700lm G13 190° matt HF 1500mm LED Retrofit Röhre with suitable ECG	LI43920140
RL-T8 58 SP UO 23,4W 840 4100lm G13 190° matt EM 1500mm LED retrofit tube for operation with a magnetic ballast	LI43720048
RL-T8 58 S HO 23,1W 840 3700lm G13 190° matt EM 1500mm LED retrofit tube for operation with a magnetic ballast; including starter	LI43819788
RL-LED T8 58S G13 UN 20W 830 2800lm L-1500mm LED retrofit tube for 230V direct connection, operation with a magnetic ballast or suitable ECG	LI43518438
RL-LED T8 58S G13 UN 20W 865 3100lm L-1500mm LED retrofit tube for 230V direct connection, operation with a magnetic ballast or suitable ECG	LI43518441