


Данни за артикула: LIUS0045--

MIROLUX 32W 3600-4000lm 2,7/3,2/4K CRI90 IP44/40 бял

Opal cover, IP44 wall mounting, IP40 ceiling mounting



Светлоразпределителна крива

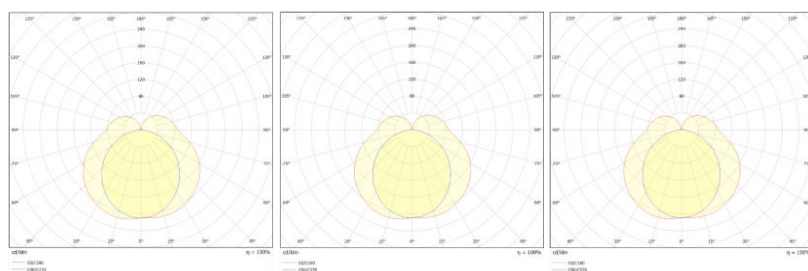


Информация за продукта

"The MIROLUX mirror luminaire is a linear LED luminaire designed to provide uniform and low-glare illumination for mirror and washbasin areas. It is available in three lengths (0.6 m, 0.9 m, 1.2 m) and is suitable for residential and professional applications. The integrated LED technology delivers a high luminous efficacy of >120 lm/W. Three correlated colour temperatures are available (2700 K / 3200 K / 4000 K) with a CRI of 90, ensuring natural and accurate colour rendering. The luminaire supports multiple mounting options: Wall mounting: IP44, suitable for bathroom installations Ceiling and pendant mounting: IP40, for general lighting applications Power consumption depends on the luminaire length: 0.6 m: 12 W 0.9 m: 20 W 1.2 m: 32 W The housing is finished in white and features a clean, functional design. MIROLUX combines efficient LED technology, high light quality and flexible installation options."

Технически данни

Нето дължина (mm)	1.200,00
Нето ширина (mm)	46,00
Нето височина (mm)	72,00
Pendant length (mm)	1,50
Нето тегло (kg)	1,60
Мин. околна температура (°C)	-20
Макс. околна температура (°C)	45
Тип осветително тяло	осветители за огледала
Монтаж	surface mounting ceiling surface mounting wall pendant
Цвят	Бяло
Материал	Поликарбонат Алуминий
Капак	Polycarbonate
Ъгъл на излъчване (°)	110
Контролер	LED контролер
Оперативно напрежение AC (V)	220-240
Работен ток mA (mA)	800
Фасунга	LED Platine
Ефективност на системата (lm/W)	112
Мощност (W)	32
Цвят на светлината	neutral white топло бяла
Цветна температура (K)	2700 4000 3200
Индекс на цвето предаване	90
Colour stability MacAdam (sdcm)	<6
Светлинен поток (lm)	3600 4000
ресурс	50.000h
Димируем	не
Клас на защита	I
Степен на защита - IP	IP44
Устойчивост на удар	IK06
С вкл. осветител	Да
ДхШхВ mm	1200x46x72
Numbers of luminars per MCB B10	10
Numbers of luminars per MCB B16	16
Numbers of luminars per MCB C10	17
Numbers of luminars per MCB C16	27

Чертеж: MIROLUX 32W 3600-4000lm 2,7/3,2/4K CRI90 IP44/40 бял

Описание	Артикулен No.
MIROLUX 32W 3600-4000lm 2,7/3,2/4K CRI90 IP44/40 бял	LIUS0045
Opal cover, IP44 wall mounting, IP40 ceiling mounting	