

Данни за артикула: MAIA2200--

buzzer module continuous tone / pulsating tone, 230-240VAC

Base required, only mountable as top modul, Версия multi buzzer, Конструкция модул, Control Dip switch, MPP диапазон на напрежение AC 230-240V



Технически данни

Серия	MA 230V
Версия	multi buzzer
MPP диапазон на напрежение (V)	AC 230-240
Конструкция	модул
Control	Dip switch
Степен на защита - IP	IP66
Диаметър, mm (mm)	70
Входове	depends on base
Необходими аксесоари	MAIB0001--;
Аксесоари	MAIB0002--;MAIR0001--
Lens	Polycarbonate, ribbed inside
Монтаж	any
ресурс	100000

Технически данни - продължение

Температурен обхват - работен (°C)	-30 to +60
Номинален ток (A)	0,04
Volume (dB)	100
Sound frequency (Hz)	500-2700
Maximum modules used	5
Инсталационен диаметър (mm)	70
Duty factor (% DF)	100
Leakage Current	3mA [PLC suitable]

Sound Chart

Dip-Switch	Pictogramm	Tone Type
	—	Steady
	- - - -	Intermittent

Dimension

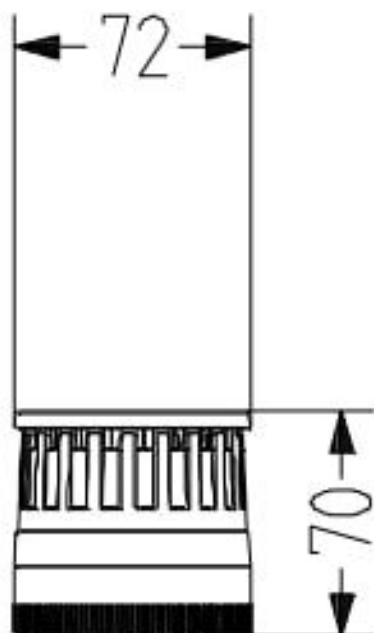


Таблица с артикули

Описание	Артикулен No.
buzzer module continuous tone / pulsating tone, 230-240VAC Base required, only mountable as top modul, Версия multi buzzer, Конструкция модул, Control Dip switch, MPP диапазон на напрежение AC 230-240V	MAIA2200
Необходими аксесоари	
Standard Base for Signal Towers modular, Black 1 to max. 5 modules per base mountable, including end cap, usable for all modules (230-240VAC and 24V AC/DC), Версия аксесоари, Конструкция празна основа, Terminal type Cage clamp	MAIB0001
Аксесоари	
Vertical Base for Signal Towers modular, Black 1 to max. 5 modules per base mountable, including end cap, usable for all modules (230-240VAC and 24V AC/DC), Версия аксесоари, Конструкция празна основа, Terminal type Cage clamp	MAIB0002
Tube base for Signal Towers, Alu-tube with plastic foot, 100mm 1 to max. 5 modules per base mountable, with plastic base 100mm, including end cap, usable for all modules (230-240VAC and 24V AC/DC), Версия аксесоари, Конструкция празна основа, Terminal type Cage clamp	MAIR0001