

Данни за артикула: MAIA3201--

Electronic multi-tone siren, 8tones, 230-240VAC

square, 8 tones adjustable per dip-switch, Версия multi buzzer, Control Constant,Dip switch, МРР диапазон на напрежение AC 230-240V



Технически данни

Серия	MA 230V
Версия	multi buzzer
МРР диапазон на напрежение (V)	AC 230-240
Control	Dip switch Constant
Степен на защита - IP	IP66
Входове	bottom/side entry
Акcesoари	MAIL2100M-
Terminal type	Screw terminal
Температурен обхват - работен (°C)	-30 to +60
Impact Resistance	IK09
Номинален ток (A)	0,04
Свързване	2.5mm ² /14AWG

Технически данни - продължение

Volume (dB)	103
Sound frequency (Hz)	500-4600
Sound type	Pulse tone
Duty factor (% DF)	100
Leakage Current	3mA [PLC suitable]
Housing	Polycarbonate red (RAL 3000)

Sound Chart

		Dip Switch	Tone Stage	Tone Type	Frequency	Pictogramm	repeat rate	application	dB
			Tone 01	Continuous	4600Hz	—			103
			Tone 02	Continuous	1500Hz	—			99
			Tone 03	Intermittent	4600Hz	— — —	250ms on, 250ms off		103
			Tone 04	Intermittent	1500Hz	— — —	250ms on,250ms off		99
			Tone 05	Sweeping	1200 - 500Hz		1 Hz	Evacuation Germany DIN 33404-3	96
			Tone 06	Sweeping	500 - 1200Hz		rising in 3s,0.5s off	Netherlands NEN 2575:2000	98
La	N		Tone 07	Alternating	800 - 1000Hz		2Hz		94
L	N		Tone 08	Sweeping	500 - 1500Hz		10Hz		94

Dimension

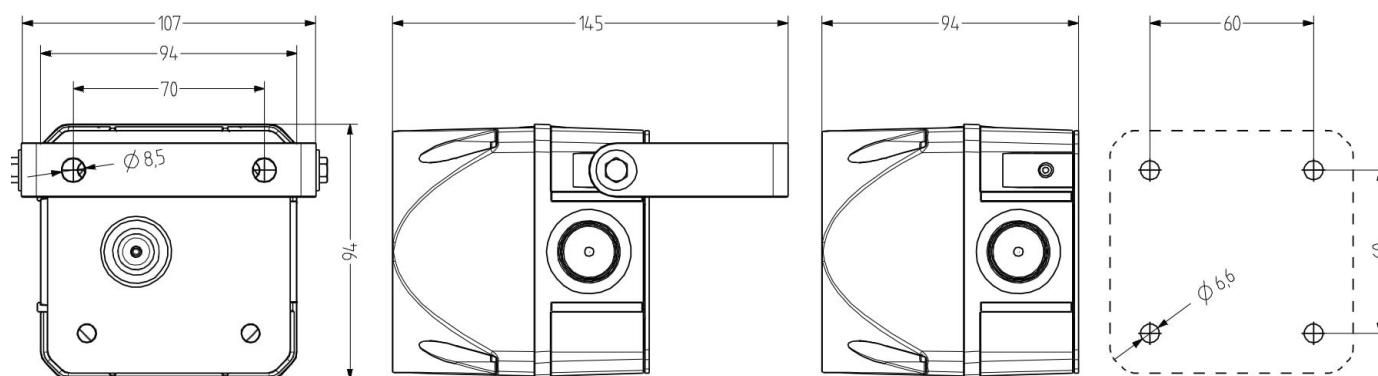


Таблица с артикули

Описание	Артикулен No.
Electronic multi-tone siren, 8tones, 230-240VAC	
square, 8 tones adjustable per dip-switch, Версия multi buzzer, Control Constant, Dip switch, MPP диапазон на напрежение AC 230-240V	MAIA3201
Акcesoари	
LED square steady/flashing light red, 24V AC/DC	
housing red, Lens in Colour of LED, Версия flash / constant, Control Multipole cable, MPP диапазон на напрежение AC/DC 24V	MAIL2100M