

Данни за артикула: MAIM4100B-

LED blinking light module, 24V AC/DC, yellow

Base required, Версия blinking, Конструкция модул, Control Constant, MPP диапазон на напрежение AC/DC 24V



Технически данни

Серия	MA 24V
Версия	blinking
Color of LED	Yellow
MPP диапазон на напрежение (V)	AC/DC 24
Конструкция	модул
Control	Constant
Степен на защита - IP	IP66
Диаметър, mm (mm)	70
Входове	depends on base
Акcesoари	MAIB0001--;MAIB0002--;MAIR0001--;MAIA3100--
Светлоизточник	LED
Lens	Polycarbonate, ribbed inside
Монтаж	any

Технически данни - продължение

ресурс	100000
Температурен обхват - работен (°C)	-30 to +60
Impact Resistance	IK08
Номинален ток (A)	0,06
Flash frequency (Hz)	2
Maximum modules used	5
Инсталационен диаметър (mm)	70
Duty factor (% DF)	100
Leakage Current	3mA [PLC suitable]

Dimension

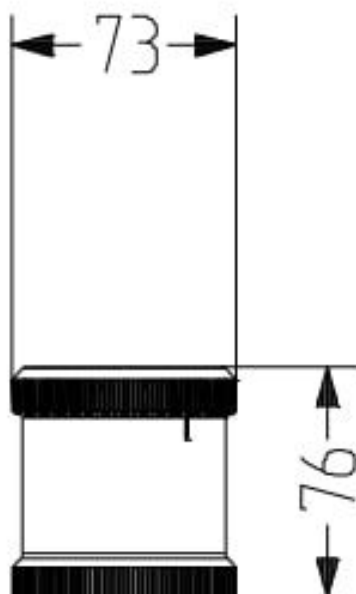


Таблица с артикули

Описание	Артикулен No.
LED blinking light module, 24V AC/DC, yellow Base required, Версия blinking, Конструкция модул, Control Constant, MPP диапазон на напрежение AC/DC 24V	MAIM4100B
Акcesoари	
Standard Base for Signal Towers modular, Black 1 to max. 5 modules per base mountable, including end cap, usable for all modules (230-240VAC and 24V AC/DC), Версия акcesoари, Конструкция празна основа, Terminal type Cage clamp	MAIB0001
Vertical Base for Signal Towers modular, Black 1 to max. 5 modules per base mountable, including end cap, usable for all modules (230-240VAC and 24V AC/DC), Версия акcesoари, Конструкция празна основа, Terminal type Cage clamp	MAIB0002
Tube base for Signal Towers, Alu-tube with plastic foot, 100mm 1 to max. 5 modules per base mountable, with plastic base 100mm, including end cap, usable for all modules (230-240VAC and 24V AC/DC), Версия акcesoари, Конструкция празна основа, Terminal type Cage clamp	MAIR0001
Multi-tone siren, 8 tones, 24V AC/DC Base required, only mountable as top modul, Версия Multi Tone, Конструкция модул, Control Dip switch, MPP диапазон на напрежение AC/DC 24V	MAIA3100