

Данни за артикула: MAIM6100D-

## LED steady light module, 24V AC/DC, blue

Base required, Версия constant, Конструкция модул, Control Constant, MPP диапазон на напрежение AC/DC 24V




### Технически данни

|                                    |                                             |
|------------------------------------|---------------------------------------------|
| Серия                              | MA 24V                                      |
| Версия                             | constant                                    |
| Color of LED                       | Blue                                        |
| MPP диапазон на напрежение (V)     | AC/DC 24                                    |
| Конструкция                        | модул                                       |
| Control                            | Constant                                    |
| Степен на защита - IP              | IP66                                        |
| Диаметър, mm (mm)                  | 70                                          |
| Входове                            | depends on base                             |
| Акcesoари                          | MAIB0001--;MAIB0002--;MAIR0001--;MAIA3100-- |
| Светлоизточник                     | LED                                         |
| Lens                               | Polycarbonate, ribbed inside                |
| Монтаж                             | any                                         |
| ресурс                             | 100000                                      |
| Температурен обхват - работен (°C) | -30 to +60                                  |

## Технически данни - продължение

|                             |                    |
|-----------------------------|--------------------|
| Impact Resistance           | IK08               |
| Номинален ток (A)           | 0,05               |
| Maximum modules used        | 5                  |
| Инсталационен диаметър (mm) | 70                 |
| Duty factor (% DF)          | 100                |
| Leakage Current             | 3mA [PLC suitable] |

## Dimension

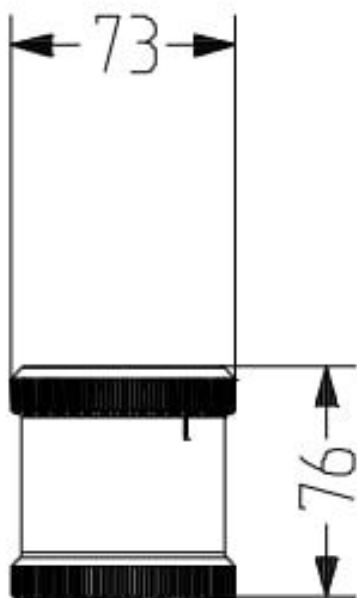

## Таблица с артикули

| Описание                                                                                                                                                                                                                                                                       | Артикулен No. |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| LED steady light module, 24V AC/DC, blue<br>Base required, Версия constant, Конструкция модул, Control Constant, MPP диапазон на напрежение AC/DC 24V                                                                                                                          | MAIM6100D     |
| <b>Акcesoари</b>                                                                                                                                                                                                                                                               |               |
| Standard Base for Signal Towers modular, Black<br>1 to max. 5 modules per base mountable, including end cap, usable for all modules (230-240VAC and 24V AC/DC), Версия акcesoари, Конструкция празна основа, Terminal type Cage clamp                                          | MAIB0001      |
| Vertical Base for Signal Towers modular, Black<br>1 to max. 5 modules per base mountable, including end cap, usable for all modules (230-240VAC and 24V AC/DC), Версия акcesoари, Конструкция празна основа, Terminal type Cage clamp                                          | MAIB0002      |
| Tube base for Signal Towers, Alu-tube with plastic foot, 100mm<br>1 to max. 5 modules per base mountable, with plastic base 100mm, including end cap, usable for all modules (230-240VAC and 24V AC/DC), Версия акcesoари, Конструкция празна основа, Terminal type Cage clamp | MAIR0001      |
| Multi-tone siren, 8 tones, 24V AC/DC<br>Base required, only mountable as top modul, Версия Multi Tone, Конструкция модул, Control Dip switch, MPP диапазон на напрежение AC/DC 24V                                                                                             | MAIA3100      |