


Данни за артикула: MAIS024BA-

LED signal tower compact, with buzzer, standard base, 24VDC

IP66, Версия Steady light or flashing light on red, Steady light on yellow, Steady light on green, Конструкция Pre-assembled signal tower, Control Multipole cable, MPP диапазон на напрежение DC 24V, Volume 75dB




Технически данни

Серия	MA 24V
Версия	Steady light or flashing light on red Steady light on yellow Steady light on green
Color of LED	Red Yellow Green
MPP диапазон на напрежение (V)	DC 24
Конструкция	Pre-assembled signal tower
Control	Multipole cable
Степен на защита - IP	IP66
Диаметър, mm (mm)	61
Входове	Bottom entry
Светлоизточник	LED

Технически данни - продължение

Terminal type	Cage clamp
Lens	Polycarbonate, ribbed inside
Монтаж	any
ресурс	100000
Температурен обхват - работен (°C)	-25 to +50
Impact Resistance	IK07
Свързване	2.5mm ² /14AWG
Volume (dB)	75
Duty factor (% DF)	100
Leakage Current	3mA [PLC suitable]
Housing	Polycarbonate White

Чепреж: LED signal tower compact, with buzzer, standard base, 24VDC

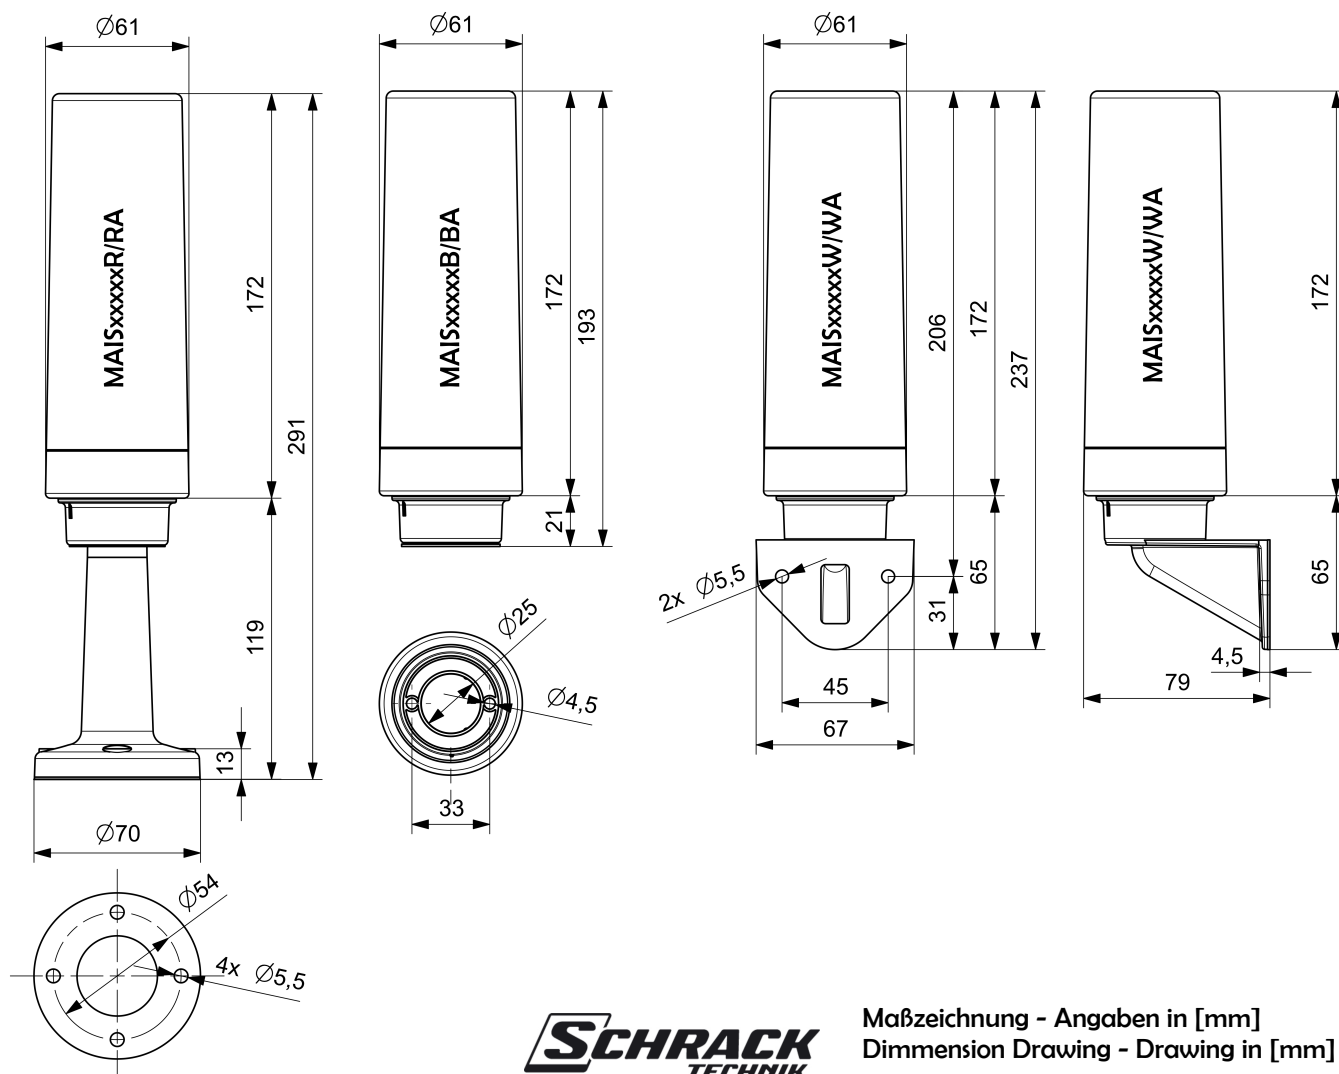

SCHRACK
TECHNIK

Maßzeichnung - Angaben in [mm]
Dimension Drawing - Drawing in [mm]

Описание

Артикулен No.

LED signal tower compact, with buzzer, standard base, 24VDC

IP66, Версия Steady light or flashing light on red, Steady light on yellow, Steady light on green, Конструкция Pre-assembled signal tower, Control Multipole cable, MPP диапазон на напрежение DC 24V, Volume 75dB