

Данни за артикула: NLAMDCE43S

Self-contained luminaire AM LED 3h 230V AC rope surface

stainless steel look, viewing distance: 22m, 1h/3h/8h adjustable, cord suspension: standard length 1500mm (shortenable), LiFePO4 battery



Технически данни

Нето дължина (mm)	241,00
Нето ширина (mm)	80,00
Нето височина (mm)	193,00
Нето тегло (kg)	1,15
Тип осветително тяло	авариен осветител
Автономност - централна бат.	Self contained luminaire
Функция	саморегулиращ се
Версия	ъглов осветител
Дизайн	AM
Цвят	stainless steel appearance
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Визуален обхват (m)	22

Технически данни - продължение

Осветеност	LED (2W)
MPP диапазон на напрежение (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	3,30
Power non-maintained mode (W)	0,90
Power max. (W)	4,20
Батерия (V/Ah)	2x3,2/1,2 LiFePO4
Степен на защита - IP	IP40
Impact Resistance	$\geq IK03$
Монтаж	surface ceiling mounting with cord
Мин. околна температура ($^{\circ}\text{C}$)	-5
Макс. околна температура ($^{\circ}\text{C}$)	40
AA Class E 8101	AA4
Производител	Schrack

Dimensions (mm)

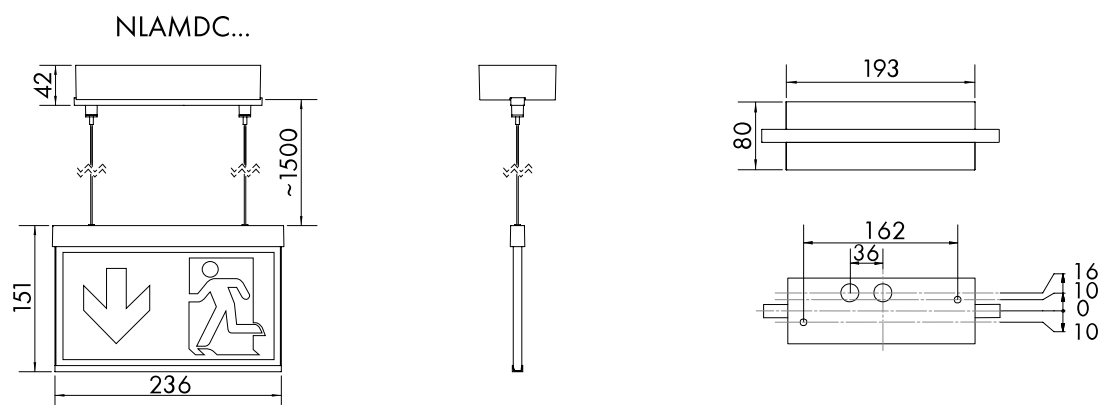


Таблица с артикули

Описание	Артикулен No.
Self-contained luminaire AM LED 3h 230V AC rope surface stainless steel look, viewing distance: 22m, 1h/3h/8h adjustable, cord suspension: standard length 1500mm (shortenable), LiFePO4 battery	NLAMDCE43S
Акcesoари	
Пиктограма стрелка ляво-горе за серии AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLO
Пиктограма стрелка ляво-долу за серии AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLU
Пиктограма стрелка дясно-горе за серии AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRO
Пиктограма стрелка дясно-долу за серии AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRU
Pictograph set "fire protection" VD: 22 m.. (2x4 pcs.) pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE
Set 2 Accus LiFePO4 3,2V 1,2Ah f. WirelessControl lum. w.LEO LiFePO4 - Lithium-iron phosphate battery , UN3480 - UN 3480 : Lithium-Ion batteries	NLAKKU321L
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV