

Данни за артикула: NLAMDW403W

Emerg.luminaire AM WirelessControl 3h 230VAC ceiling surface

white, LiFePO4 battery, viewing distance: 22m, radio switchable



Технически данни

Нето дължина (mm)	241,00
Нето ширина (mm)	80,00
Нето височина (mm)	184,00
Нето тегло (kg)	1,15
Тип осветително тяло	авариен осветител
Автономност - централна бат.	Self contained luminaire
Функция	WirelessControl Professional
Версия	ъглов осветител
Дизайн	AM
Цвят	RAL 9003 (white)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Визуален обхват (m)	22
Време на съхранение (h)	3

Технически данни - продължение

Illuminant	LED (2W)
MPP диапазон на напрежение (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	3,50
Power non-maintained mode (W)	0,80
Power max. (W)	4,70
Батерия (V/Ah)	4,8/2,0 NiMh
Степен на защита - IP	IP40
Impact Resistance	$\geq IK03$
Монтаж	surface mounting ceiling
Мин. околна температура ($^{\circ}\text{C}$)	-5
Макс. околна температура ($^{\circ}\text{C}$)	40
AA Class E 8101	AA4
Производител	Schrack

Dimensions (mm)

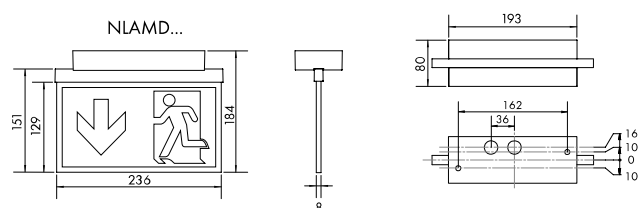


Таблица с артикули

Описание	Артикулен No.
Emerg.luminaire AM WirelessControl 3h 230VAC ceiling surface white, LiFePO4 battery, viewing distance: 22m, radio switchable	NLAMDW403W
Акcesoари	
Пиктограма стрелка ляво-горе за серии AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLO
Пиктограма стрелка ляво-долу за серии AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLU
Пиктограма стрелка дясно-горе за серии AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRO
Пиктограма стрелка дясно-долу за серии AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRU
Pictograph set "fire protection" VD: 22 m.. (2x4 pcs.) pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE
Concrete plaster box for emergency luminaire Design AM/AX	NLAMAXBE
Акумулатор 4,8V 2,0Ah за осветители LED с LPU модул LPU or LEM module	NLAKKU4820