

Данни за артикула: NLAMWTW09E

Emergency luminaire AM Duo white, LED, wall surface

Centrally switchable, with single lamp supervision, viewing distance: 22m, 230V AC/DC, with additional LED spot for safety illumination in emergency mode, 140lm




Технически данни

Нето дължина (mm)	241,00
Нето ширина (mm)	50,00
Нето височина (mm)	151,00
Нето тегло (kg)	1,15
Тип осветително тяло	комб. аварийни и RZ осветители
Автономност - централна бат.	Central power supply luminaire
Функция	with monitoring - centrally switchable
Версия	ъглов осветител
Дизайн	AM
Цвят	RAL 9003 (white)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Визуален обхват (m)	20

Технически данни - продължение

Illuminant	LED (2W) ERT-LED (1W)
Lumen	140
MPP диапазон на напрежение (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
Power maintained mode (W)	3,10
Power non-maintained mode (W)	1,10
Power max. (W)	4,20
Степен на защита - IP	IP40
Impact Resistance	$\geq IK03$
Монтаж	surface mounting wall
Мин. околна температура ($^{\circ}\text{C}$)	-5
Макс. околна температура ($^{\circ}\text{C}$)	40
AA Class E 8101	AA4
Производител	Schrack

Dimensions (mm)

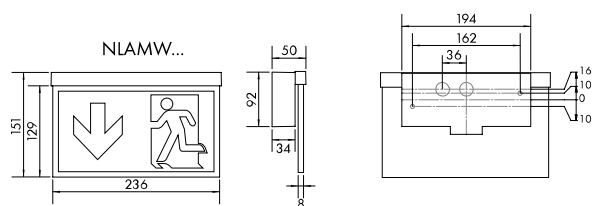

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80

					
2,00	0,72	2,95	2,88	4,50	1,90
2,50	0,89	3,34	3,32	5,09	2,10
3,00	1,05	3,68	3,69	5,59	2,28
3,50	1,19	4,03	4,04	6,01	2,42
4,00	1,33	4,25	4,26	6,38	2,53
5,00	1,54	4,69	4,64	6,92	2,60
6,00	1,70	5,02	4,84	7,28	2,40
7,00	1,73	4,94	4,80	7,37	1,86
8,00	1,30	5,19	4,39	7,11	0,96

Таблица с артикули

Описание	Артикулен No.
Emergency luminaire AM Duo white, LED, wall surface Centrally switchable, with single lamp supervision, viewing distance: 22m, 230V AC/DC, with additional LED spot for safety illumination in emergency mode, 140lm	NLAMWTW09E
Акcesoари	
Пиктограма стрелка ляво-горе за серии AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLO
Пиктограма стрелка ляво-долу за серии AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLU
Пиктограма стрелка дясно-горе за серии AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRO
Пиктограма стрелка дясно-долу за серии AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRU
Pictograph set "fire protection" VD: 22 m.. (2x4 pcs.) pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE
Pictograph set "first aid" vd: 22m (2x4 pcs.) pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
Surface adapter за emergency luminaire Design AM/AX white, for lateral cable entry	NLAMAXAPAW