

Данни за артикула: NLILEL428W

Евак. осв. IL Wireless 1x3W ERTLED 8h 230VAC сменяеми лещи

White, recessed ceiling mounting, LiFePO4 battery, emergency luminaire with exchangeable lenses for illuminating escape routes or round surfaces, central switching, 125lm




Технически данни

Нето височина (mm)	95,00
Нето диаметър (mm)	122,00
Нето тегло (kg)	0,30
Тип осветително тяло	авариен осветител
Автономност - централна бат.	Self contained luminaire
Функция	WirelessControl Professional
Версия	пластмасов осветител
Дизайн	IL
Безхалогенен	Housing made of halogen-free plastic
Цвят	RAL 9003 (white)
Време на съхранение (h)	8
Осветеност	ERT-LED (3W)
Лумен	125


Технически данни - продължение

MPP диапазон на напрежение (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	2,30
Power non-maintained mode (W)	0,40
Power max. (W)	3,40
Батерия (V/Ah)	3,2/3,3 LiFePO ₄
Степен на защита - IP	IP20
Impact Resistance	$\geq IK03$
Монтаж	вграждане в таван
Мин. околна температура (°C)	-5
Макс. околна температура (°C)	30
AA Class E 8101	AA4
Производител	Schrack

Dimensions NLILE... (mm)

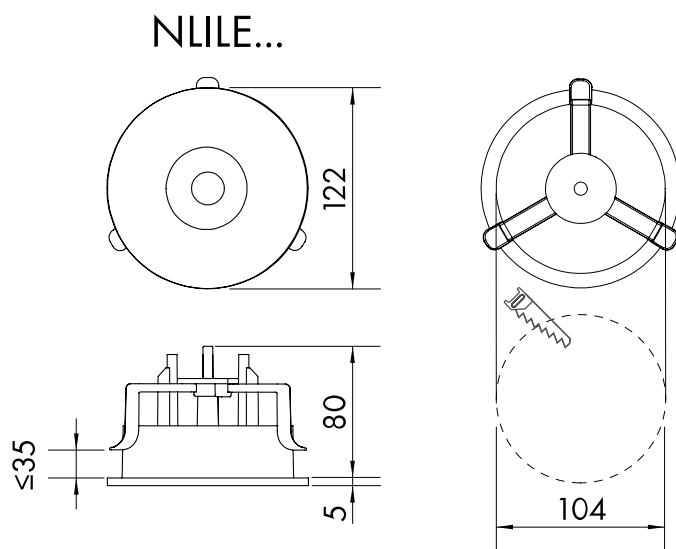

Wall illumination 5 lux for safety devices with optional beam lens (NLLSYB4) - Maintenance factor 0.8 - 8h

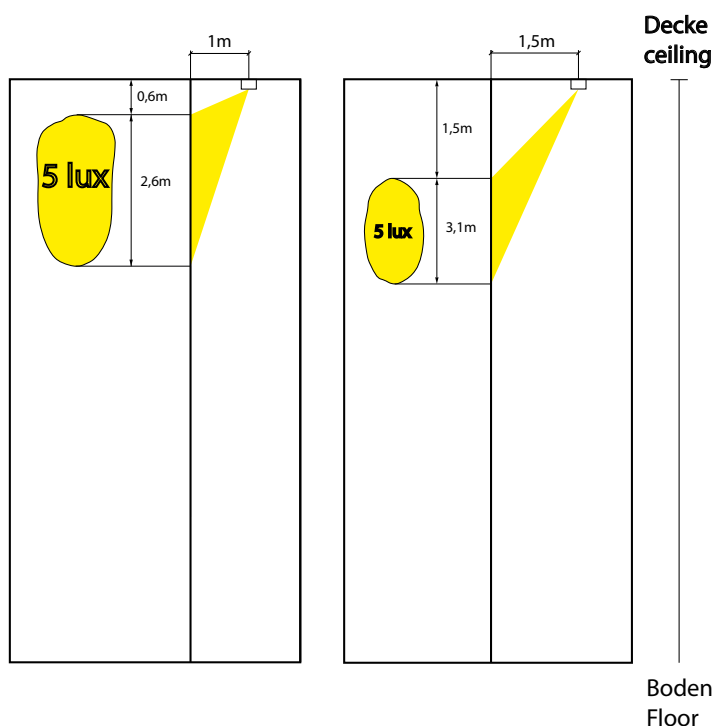

Spacing table with corridor lens (included in scope delivery) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	1,69	4,91	9,16	13,34	5,79
2,50	1,60	5,00	10,20	15,42	6,53
3,00	1,65	4,87	11,00	17,12	7,02
3,50	1,49	4,71	8,03	15,40	2,01

Spacing table with round lens (included in scope of delivery) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	3,63	7,93	7,93	7,93	3,63
2,50	3,93	9,48	9,48	9,48	3,93
3,00	0,17	7,32	7,32	7,32	0,17

Spacing table with spot lens (must be ordered separately) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	1,60	3,70	3,70	3,70	1,60
2,50	1,89	4,31	4,31	4,31	1,89
3,00	2,13	4,85	4,85	4,85	2,13
3,50	2,34	5,42	5,42	5,42	2,34
4,00	2,53	5,90	5,90	5,90	2,53
5,00	2,81	6,73	6,73	6,73	2,81
6,00	2,92	7,47	7,47	7,47	2,92
7,00	2,90	7,98	7,98	7,98	2,90
8,00	2,73	8,27	8,27	8,27	2,73
9,00	2,42	8,35	8,35	8,35	2,42
10,00	1,88	8,24	8,24	8,24	1,88

Spacing table with high corridor lens (must be ordered separately) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	1,03	3,50	6,13	8,82	3,62
2,50	1,04	3,52	6,77	9,99	4,03
3,00	1,07	3,10	7,08	10,94	4,35
3,50	1,17	3,01	7,25	11,73	4,53
4,00	1,24	2,98	7,41	12,39	4,63
5,00	1,29	3,33	7,61	13,27	4,65
6,00	1,33	3,56	7,63	13,61	4,47
7,00	1,25	3,65	7,46	13,61	4,01
8,00	1,09	3,76	7,02	13,33	3,31
9,00	0,77	3,72	6,34	12,77	2,12

Таблица с артикули

Описание	Артикулен No.
Евак. осв. IL Wireless 1x3W ERTLED 8h 230VAC сменяеми лещи White, recessed ceiling mounting, LiFePO4 battery, emergency luminaire with exchangeable lenses for illuminating escape routes or NLILEL428W round surfaces, central switching, 125lm	
Акcesoари	
4 LED сменяеми лещи: за осветяване във високи стаи Suitable for emergency luminaires with changeable lens system	NLLSYSS4
Tool to easily open emergency luminaires design IL recessed	NLILTOOL
HSS Биметална боркоронка, d105mm, без водач	GI63290105
Защитен капак lxwxh=190x190x62mm, за IL/EA Thickness 5mm, recommended for NLIL.. surface mounted	NLBALLPLX4
Защитна решетка за IL, KI, VI, RI, KT, DAQ, DAR l x h x d: 200 x 200 x 90mm	NLBALL3
4 LED сменяеми лещи: за осветяване във високи стаи Suitable for emergency luminaires with changeable lens system	NLLSYSS4
Accu 3,2V 3,0Ah LiFePO4 f.self contained LED осв.KSC,KMB ZAW For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3230