

Данни за артикула: NLKMB003SC

Авариен осветител KMB Autotest LED 3h 230VAC

White, universal mounting, with 4x0,5W High Power LED, with LiFePO4 battery, 1h/3h/8h adjustable, 1h: 190lm; 3h: 190lm; 8h: 85lm



Технически данни


Нето дължина (mm)	250,00
Нето ширина (mm)	34,00
Нето височина (mm)	50,00
Нето тегло (kg)	0,29
Тип осветително тяло	авариен осветител
Автономност - централна бат.	Self contained luminaire
Функция	саморегулиращ се
Версия	пластмасов осветител
Дизайн	KMB
Безхалогенен	Housing made of halogen-free plastic
Цвят	RAL 9003 (white)
Осветеност	LED (2W)
Лумен	1h: 190;3h: 190;8h: 85
MPP диапазон на напрежение (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,30
Power non-maintained mode (W)	1
Power max. (W)	4,60
Батерия (V/Ah)	3,2/3,0 LiFePO4
Степен на защита - IP	IP54
Impact Resistance	≥ IK03

Технически данни - продължение


Монтаж	surface mounting ceiling универсален surface mounting wall recessed mounting ceiling optional
Мин. околна температура (°C)	-5
Макс. околна температура (°C)	40
AA Class E 8101	AA4
Производител	Schrack

Dimensions (mm)

NLKMB...

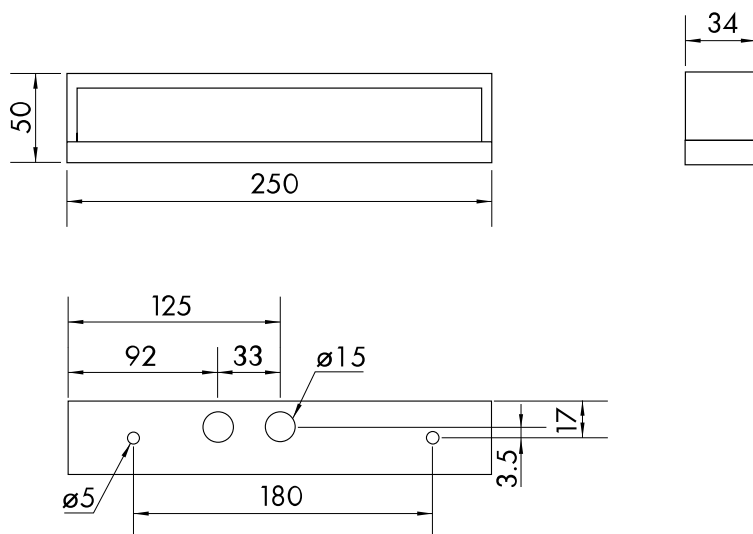

NLKME

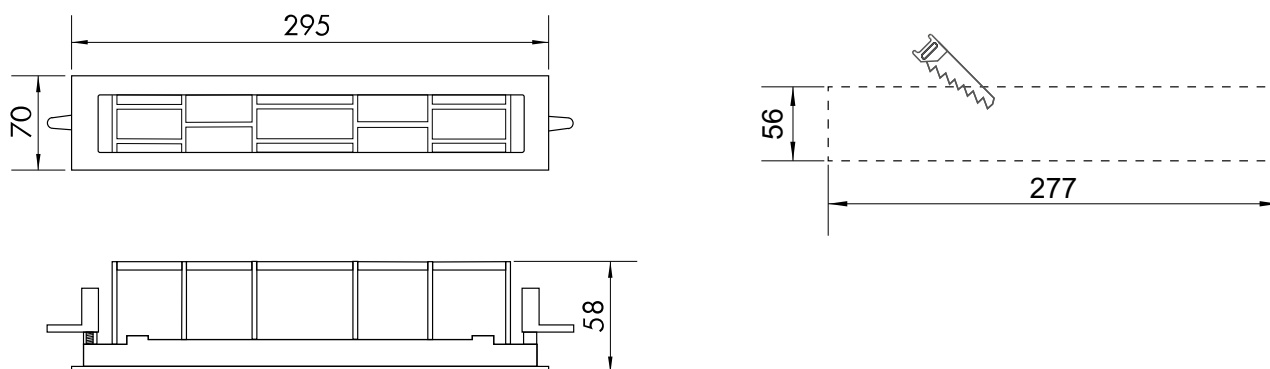

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - Autonomy time 1h/3h

					
2,00	1,66	4,42	7,55	10,74	4,54
2,50	1,64	4,76	8,42	12,16	5,10
3,00	1,67	4,74	9,08	13,39	5,57
3,50	1,63	4,65	9,52	14,49	5,97
4,00	1,59	4,72	10,03	15,48	3,78
5,00	1,19	4,62	7,33	14,22	2,89

**Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx -
Maintenance factor 0.80 - Autonomy time 8h**

					
2,00	1,11	3,14	5,98	8,83	3,65
2,50	1,08	3,14	6,47	9,90	3,95
3,00	0,98	3,16	5,15	9,46	2,11
3,50	0,66	3,08	4,70	9,30	1,44

Таблица с артикули

Описание	Артикулен No.
Аварийен осветител KMB Autotest LED 3h 230VAC White, universal mounting, with 4x0,5W High Power LED, with LiFePO4 battery, 1h/3h/8h adjustable, 1h: 190lm; 3h: 190lm; 8h: 85lm	NLKMB003SC
Акcesoари	
Скрита рамка за евакуационен осветител CPS design KM Required ceiling cut out: 277 x 56 mm	NLKME
скоби за монтаж на стена, бяло за серии KM/KS	NLAWKSU
Accu 3,2V 3,0Ah LiFePO4 f.self contained LED осв.KSC,KMB ZAW For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3230
Design pair of pendants 500 mm бяло, wired Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWKMKS
Въжено окачване	NLDSA000
Комплект за окачване 2000mm, 1 комплект	NLCORD2
Комплект за окачване 4000mm, 1 комплект	NLCORD4