

Данни за артикула: NLKMBT403W

Emergency luminaire KMB WirelessControl LED 3h 230V AC TT

White, Universal mounting, with 4x0,5W HP-LED, emergency luminaire for illuminating escape routes, 190lm, LiFePO₄ battery suitable for low temperatures -25° to 40°C



Технически данни



Нето дължина (mm)	250,00
Нето ширина (mm)	34,00
Нето височина (mm)	50,00
Нето тегло (kg)	0,29
Тип осветително тяло	авариен осветител
Автономност - централна бат.	Self contained luminaire
Функция	WirelessControl Low Temperature
Версия	пластмасов осветител
Дизайн	KMB
Безхалогенен	Housing made of halogen-free plastic
Цвят	RAL 9003 (white)
Време на съхранение (h)	3
Осветеност	LED (2W)

Технически данни - продължение


Лумен	190
MPP диапазон на напрежение (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Батерия (V/Ah)	3,2V/3,3Ah LiFePO4-TT
Степен на защита - IP	IP54
Impact Resistance	$\geq IK03$
Монтаж	surface mounting ceiling универсален surface mounting wall recessed mounting ceiling optional
Мин. околна температура ($^{\circ}\text{C}$)	-25
Макс. околна температура ($^{\circ}\text{C}$)	40
AA Class E 8101	AA3 AA4
Производител	Schrack

Abmessungen (mm)

NLKMB...

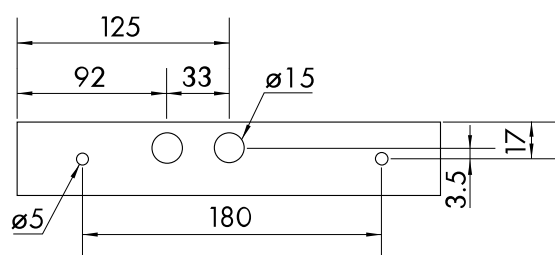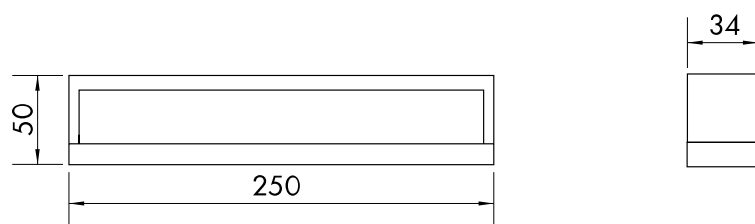

NLKME

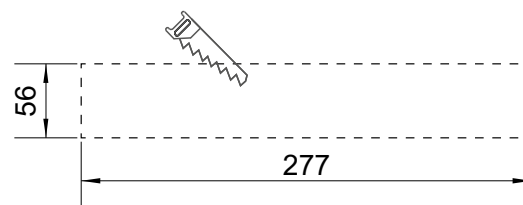

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 1h/3h Autonomiezeit

					
2,00	1,66	4,42	7,55	10,74	4,54
2,50	1,64	4,76	8,42	12,16	5,10
3,00	1,67	4,74	9,08	13,39	5,57
3,50	1,63	4,65	9,52	14,49	5,97
4,00	1,59	4,72	10,03	15,48	3,78
5,00	1,19	4,62	7,33	14,22	2,89

Таблица с артикули

Описание	Артикулен No.
Emergency luminaire KMB WirelessControl LED 3h 230V AC TT White, Universal mounting, with 4x0,5W HP-LED, emergency luminaire for illuminating escape routes, 190lm, LiFePO4 battery suitable for low temperatures -25° to 40°C	NLKMBT403W
Акcesoари	
Скрита рамка за евакуационен осветител CPS design KM Required ceiling cut out: 277 x 56 mm	NLKME
скоби за монтаж на стена, бяло за серии KM/KS	NLAWKSU
Батерия LiFePO4 3.2V 3.3Ah за LED осв., KM,KSC,KMB,ASM,ZAW LiFePO4 - Lithium-iron-phosphate battery suitable for low temperatures, UN3480 - LITHIUM-ION BATTERIES, The permissible ambient luminaire temperatures are specified for the low temperature luminaires	NLAKKU323T
Design pair of pendants 500 mm бяло, wired Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWKMKS
Въжено окачване	NLDSA000
Комплект за окачване 2000mm, 1 комплект	NLCORD2
Комплект за окачване 4000mm, 1 комплект	NLCORD4