

Данни за артикула: NLKSCS403W

Emergency luminaire KS WirelessControl LED 3h 230V AC, black

Universal mounting, with LiFePO₄ battery, with 4x0,5W High Power LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, 190lm



Технически данни

Нето дължина (mm)	250,00
Нето ширина (mm)	34,00
Нето височина (mm)	174,00
Нето тегло (kg)	0,60
Тип осветително тяло	комб. аварийни и RZ осветители авариен осветител
Автономност - централна бат.	Self contained luminaire
Функция	WirelessControl Professional
Версия	пластмасов осветител ъглов осветител
Дизайн	KS
Безхалогенен	Housing made of halogen-free plastic
Цвят	RAL 9005 (black)

Технически данни - продължение

Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Визуален обхват (m)	22
Време на съхранение (h)	3
Осветеност	LED (2W)
Лумен	190
MPP диапазон на напрежение (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Батерия (V/Ah)	3,2/3,0 LiFePO4
Степен на защита - IP	IP54
Impact Resistance	$\geq IK03$
Монтаж	surface mounting ceiling универсален surface mounting wall recessed mounting ceiling optional
Мин. околна температура (°C)	-5
Макс. околна температура (°C)	40
AA Class E 8101	AA4
Производител	Schrack

Abmessungen (mm)



NLKS...



NLKME



Bohrabstände (mm)

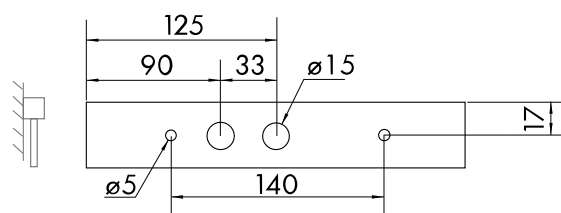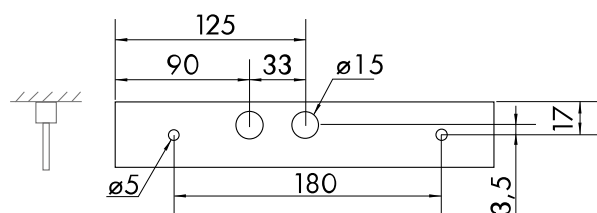

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 1h/3h Autonomiezeit

					
2,00	3,01	7,45	7,31	6,8	2,73
2,50	1,71	8,22	7,95	7,38	3,09
3,00	1,24	7,01	6,74	8,07	3,15
3,50	1,21	6,33	6,34	8,72	2,89
4,00	1,24	3,56	6,18	8,9	2,82
5,00	1,08	3,45	5,58	8,17	2,02

Таблица с артикули

Описание	Артикулен No.
Emergency luminaire KS WirelessControl LED 3h 230V AC, black Universal mounting, with LiFePO4 battery, with 4x0,5W High Power LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, 190lm	NLKSCS403W
Акcesoари	
Accu LiFePO4 3,2V 3,3Ah for LED luminaire For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phosphat battery, UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3233
Пиктограма стрелка ляво-горе за серии AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLO
Пиктограма стрелка ляво-долу за серии AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLU
Пиктограма стрелка дясно-горе за серии AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRO
Пиктограма стрелка дясно-долу за серии AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRO
Pictograph set "fire protection" VD: 22 m.. (2x4 pcs.) pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE
Pictograph set "first aid" vd: 22m (2x4 pcs.) pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
скоби за монтаж на стена, бяло за серии KM/KS	NLAWKSU
Design pair of pendants 500 mm бяло, wired Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWMKMS
Сф. защита за KD, KS, LI, KM, MK, S6, SD, SM, TI, TM, VM l x h x d: 320 x 220 x 120mm	NLBALL1
Въжено окачване	NLDSA000
Комплект за окачване 2000mm, 1 комплект	NLCORD2

Таблица с артикули

Описание	Артикулен No.
Акcesoари	
Комплект за окачване 4000mm, 1 комплект	NLCORD4