

Данни за артикула: NLKWD433WL

Авариен осветител KW WiFi 4x1W ERT LED 3h 230Vмонтаж таван

With exchangeable lenses, corridor lenses in scope of delivery included, LiFePO₄, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side, viewing distance: 16m, IP54, protection class II, radio switchable, dimmable, 520lm, WirelessControl Professional type




Технически данни

Нето дължина (mm)	390,00
Нето ширина (mm)	93,00
Нето височина (mm)	139,00
Нето тегло (kg)	1,30
Тип осветително тяло	авариен осветител
Автономност - централна бат.	Self contained luminaire
Функция	WirelessControl Professional
Версия	пластмасов осветител
Дизайн	KW
Безхалогенен	Housing made of halogen-free plastic
Цвят	Бяло

Технически данни - продължение

Pictogram	Adhesive pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Визуален обхват (m)	16
Време на съхранение (h)	3
Illuminant	ERT-LED (4W)
Lumen	520
MPP диапазон на напрежение (V)	230V AC 50Hz $\pm 20\%$
Батерия (V/Ah)	2x 3,2V/3,3Ah LiFePO4
Степен на защита - IP	IP54
Монтаж	surface mounting ceiling
Мин. околна температура (°C)	-5
Макс. околна температура (°C)	40
AA Class E 8101	AA4
Производител	Schrack

Чертеж: Аварийен осветител KW WiFi 4x1W ERT LED 3h 230V монтаж таван

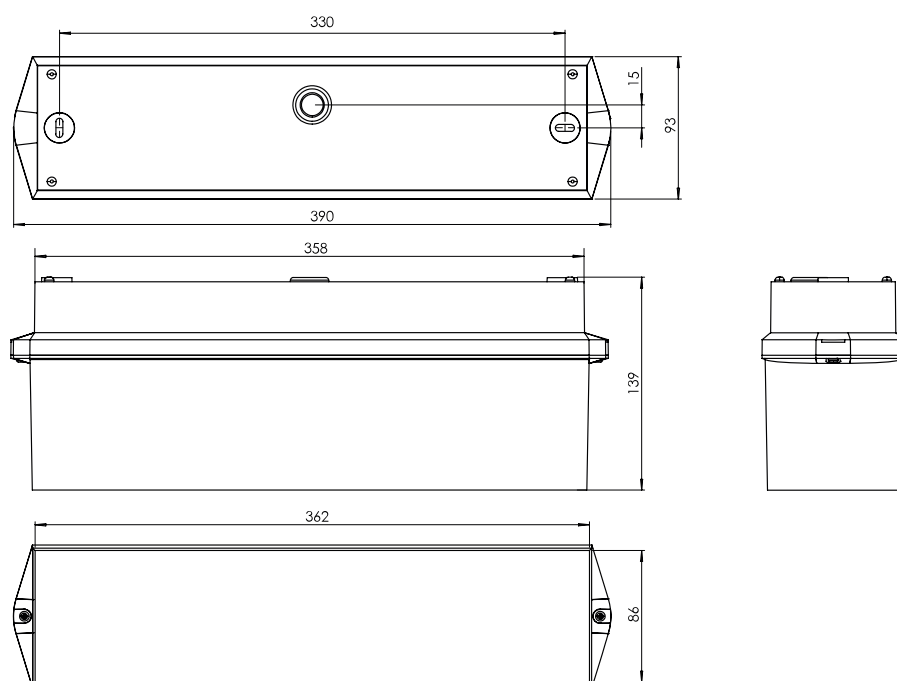

Abstandstabelle mit Korridorlinsen quer (im Lieferumfang enthalten) - Min. Beleuchtungsstärke auf der Mittellinie: 1lx - Wartungsfaktor 0,80 - 1h/3h Autonomiezeit

Montagehöhe [m]					
2,00	3,87	10,02	8,29	6,56	2,53
2,50	4,00	10,59	8,78	6,99	2,60
3,00	4,02	10,97	9,10	7,25	2,57
3,50	3,95	11,20	9,28	7,36	2,44
4,00	3,77	11,29	9,32	7,34	2,19
5,00	2,88	11,04	8,96	6,86	0,94

Abstandstabelle ohne eingesetzte Linsen - Min. Beleuchtungsstärke auf der Mittellinie: 1lx - Wartungsfaktor 0,80 - 1h/3h Autonomiezeit

Montagehöhe [m]					
2,00	3,82	9,88	8,56	7,32	2,88
2,50	3,98	10,50	9,14	7,87	3,01
3,00	4,06	10,95	9,57	8,26	3,06
3,50	4,04	11,26	9,85	8,51	3,02
4,00	3,94	11,44	10,01	8,64	2,90
5,00	3,42	11,42	9,96	8,54	2,34
6,00	1,86	10,92	9,40	7,96	0,56

Таблица с артикули

Описание	Артикулен No.
Аварийен осветител KW WiFi 4x1W ERT LED 3h 230Vмонтаж таван With exchangeable lenses, corridor lenses in scope of delivery included, LiFePO4, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side, viewing distance: 16m, IP54, protection class II, radio switchable, dimmable, 520lm, WirelessControl Professional type	NLKWD433WL
Акcesoари	
Сферична защитна кошница за KW	NLBKW
Комплект пиктограми за NLKWI.. ляво, дясно, нагоре, надолу	NLKWIPIKTO
Пендел к-т 500mm бял кабел	NL2PW
скоби за монтаж на стена,бяло за серии:KB,KX,KW,KCD,KE,GX,RX	NLAWX001
Accu 3,2V 3,0Ah LiFePO4 f.self contained LED осв.KSC,KMB ZAW For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3230
4 LED сменяеми лещи: Елипсовидно разпределение за коридор Suitable for emergency luminaires with exchangeable lens system	NLSYSF4
4 LED сменяеми лещи: Кръгово разпределение на светлината Suitable for emergency luminaires with changeable lens system	NLSYSR4
4 LED сменяеми лещи: за осветяване във високи стаи Suitable for emergency luminaires with changeable lens system	NLSYSS4
4 LED сменяеми лещи: Асиметрично разпределение на светл. For illumination of safety equipment (e.g. first aid boxes, fire extinguishers, etc.), Suitable for emergency luminaires with changeable lens system	NLSYSB4