

Данни за артикула: NLKWICC33S

Евак. осв. KWI Cool Autotest 4x1W ERT-LED 3h 230V AC

With exchangeable lenses, corridor lenses in scope of delivery included, 1h/3h/8h adjustable, ceiling surface mounting, security luminaire with transparent cover for illumination of escape routes, temp. range -30° up to 35°C, batteries and electronics in external IP54 housing (176 x 130 x 76mm) to be mounted outside the cold area, 1h/3h/8h adjustable, viewing distance: 16m, IP65, IK06, protection class II, 1h: 520lm; 3h: 520lm; 8h: 200lm




Технически данни

Нето дължина (mm)	390,00
Нето ширина (mm)	93,00
Нето височина (mm)	99,00
Нето тегло (kg)	1,37
Тип осветително тяло	авариен осветител
Автономност - централна бат.	Self contained luminaire
Функция	SelfControl Low Temperature
Версия	пластмасов осветител
Дизайн	KWI


Технически данни - продължение

Безхалогенен	Housing made of halogen-free plastic
Цвят	Бяло
Визуален обхват (m)	16
Време на съхранение (h)	3
Illuminant	ERT-LED (4W)
Lumen	1h: 520;3h: 520;8h: 200
MPP диапазон на напрежение (V)	230V AC 50Hz $\pm 20\%$
Батерия (V/Ah)	9,6/2,0 NiMH
Степен на защита - IP	IP65
Impact Resistance	IK06
Монтаж	surface mounting ceiling
Мин. околна температура (°C)	-30
Макс. околна температура (°C)	40
AA Class E 8101	AA3 AA4 AA5
Производител	Schrack

Dimensions (mm)

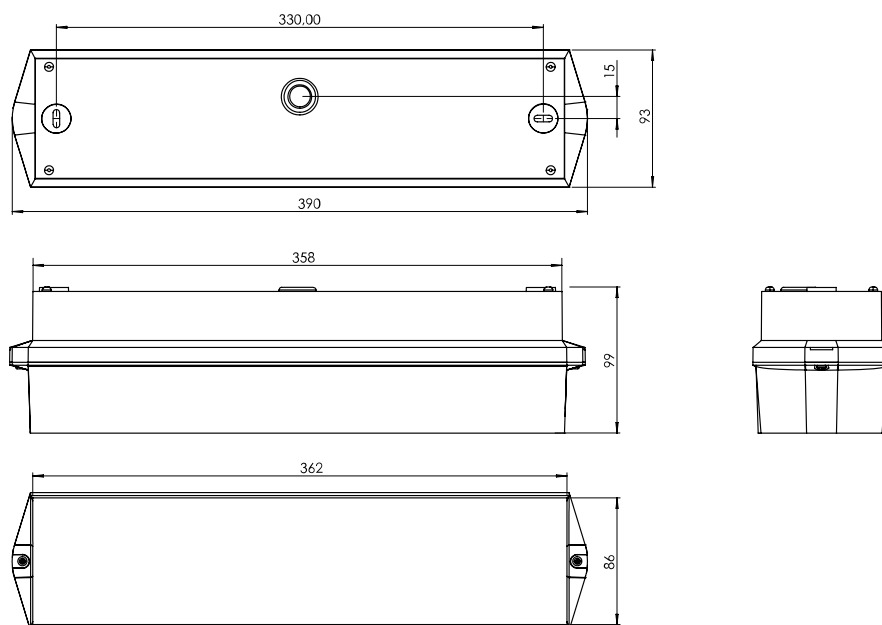

Housing IP54 for COOL version (mm)

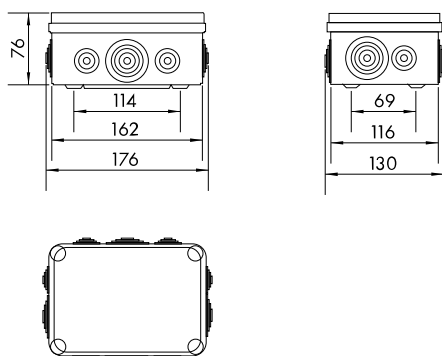

Таблични файлове: Евак. осв. KWI Cool Autotest 4x1W ERT-LED 3h 230V AC

					
2,00	7,36	17,11	12,52	7,88	3,09
2,50	8,47	19,63	14,05	8,45	3,28
3,00	9,46	21,93	15,41	8,95	3,39
3,50	10,37	24,15	16,69	9,32	3,43
4,00	11,2	26,19	17,85	9,58	3,45
5,00	4,73	24,45	13,86	9,8	3,38
6,00	5,23	23,48	11,64	9,82	3,17
7,00	2,93	13,48	11,45	9,69	2,58

Таблични файлове: Евак. осв. KWI Cool Autotest 4x1W ERT-LED 3h 230V AC

					
2,00	4,14	10,15	9,84	9,45	3,79
2,50	4,46	11,2	10,77	10,21	4,14
3,00	4,73	12,01	11,52	10,97	4,47
3,50	4,94	12,63	12,15	11,68	4,67
4,00	5,05	13,18	12,77	12,36	4,79
5,00	5,36	14,04	13,66	13,28	4,89
6,00	4,7	14,45	14,12	13,72	4,72
7,00	4,34	14,61	14,29	13,9	4,03
8,00	3,7	14,8	13,71	13,63	3,54
9,00	2,17	13,05	12,97	12,89	2,24

Таблични файлове: Евак. осв. KWI Cool Autotest 4x1W ERT-LED 3h 230V AC

					
2,00	5,94	13,92	9,74	5,61	2,08
2,50	6,72	15,99	10,91	5,89	2,09
3,00	2,79	14,44	9,43	6	2,05
3,50	3,06	13,73	6,85	6,03	1,98
4,00	2,69	7,79	6,97	5,99	1,84

Таблични файлове: Евак. осв. KWI Cool Autotest 4x1W ERT-LED 3h 230V AC

					
2,00	3,03	7,71	7,44	7,1	2,87
2,50	3,17	8,29	8,05	7,8	3,01
3,00	3,21	8,77	8,55	8,3	3,08
3,50	3,22	9,04	8,8	8,57	3,05
4,00	2,94	9,24	9,01	8,73	2,9
5,00	2,37	9,39	8,74	8,66	2,23
6,00	0,43	8,09	7,86	7,86	0,44

Таблични файлове: Евак. осв. KWI Cool Autotest 4x1W ERT-LED 3h 230V AC

					
2,00	4,37	9,66	9,50 9,29 4,19	4,89	1,89
2,50	5,14	11,36	11,13 10,84 4,98	6,12	2,36
3,00	5,86	12,86	12,66 12,46 5,68	7,34	2,83
3,50	6,51	14,46	14,24 14,01 6,31	8,57	3,3
4,00	7,1	15,94	15,69 15,44 6,80	9,79	3,78
5,00	4,53	18,43	16,35 17,85 5,61	10,53	4,04
6,00	0,96	15,82	15,42 15,08 1,07	11,02	4,18

Таблични файлове: Евак. осв. KWI Cool Autotest 4x1W ERT-LED 3h 230V AC

					
2,00	1,84	4,46	4,46	4,46	1,84
2,50	2,3	5,58	5,58	5,58	2,3
3,00	2,77	6,7	6,7	6,7	2,77
3,50	3,08	7,33	7,33	7,33	3,08
4,00	3,3	7,75	7,75	7,75	3,3
5,00	3,84	8,81	8,81	8,81	3,84
6,00	4,26	9,8	9,8	9,8	4,26
7,00	4,65	10,85	10,85	10,85	4,65
8,00	4,97	11,74	11,74	11,74	4,97
9,00	5,21	12,49	12,49	12,49	5,21
10,00	5,35	13,27	13,27	13,27	5,35
12,00	5,4	14,46	14,46	14,46	5,4
14,00	5,18	15,16	15,16	15,16	5,18
16,00	4,69	15,36	15,36	15,36	4,69

Таблични файлове: Евак. осв. KWI Cool Autotest 4x1W ERT-LED 3h 230V AC

					
2,00	4,54	10,47	7,67	4,83	1,79
2,50	5,65	13,09	9,59	6,03	2,24
3,00	6,28	14,77	10,84	6,83	2,47
3,50	6,81	16,21	11,6	6,99	2,45
4,00	7,29	17,52	12,28	7,06	2,35
5,00	8,1	19,73	13,35	6,98	1,91
6,00	8,75	21,58	13,68	6,07	2
7,00	9,11	23,16	14,24	5,46	2,12
8,00	9,33	24,52	14,54	5,55	2,16
9,00	9,51	25,69	14,72	5,88	2,23
10,00	9,27	26,29	14,82	6,08	2,29
12,00	8,41	27,15	14,19	6,24	2,22
14,00	7,09	26,85	13,73	6,51	1,92
16,00	4,53	24,91	12,22	6,48	1,36

Таблица с артикули

Описание	Артикулен No.
Евак. осв. KWI Cool Autotest 4x1W ERT-LED 3h 230V AC	
With exchangeable lenses, corridor lenses in scope of delivery included, 1h/3h/8h adjustable, ceiling surface mounting, security luminaire with transparent cover for illumination of escape routes, temp. range -30° up to 35°C, batteries and electronics in external NLKWICC33S IP54 housing (176 x 130 x 76mm) to be mounted outside the cold area, 1h/3h/8h adjustable, viewing distance: 16m, IP65, IK06, protection class II, 1h: 520lm; 3h: 520lm; 8h: 200lm	
Акcesoари	
Сферична защитна кошница за KW	NLBKW
Комплект пиктограми за NLKW.. ляво, дясно, нагоре, надолу	NLKWIPKTO
Пендел к-т 500mm бял кабел	NL2PW
скоби за монтаж на стена, бяло за серии: KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Акумулатор 9,6V 2,0 Ah за осветители ERT-LED 1h, 3h, 8h Suitable for LPU module	NLAKKU9620
4 LED сменяеми лещи: Елипсовидно разпределение за коридор Suitable for emergency luminaires with exchangeable lens system	NLLSYSF4
4 LED сменяеми лещи: Кръгово разпределение на светлината Suitable for emergency luminaires with changeable lens system	NLLSYSR4
4 LED сменяеми лещи: за осветяване във високи стаи Suitable for emergency luminaires with changeable lens system	NLLSYSS4
4 LED сменяеми лещи: Асиметрично разпределение на светл. For illumination of safety equipment (e.g. first aid boxes, fire extinguishers, etc.), Suitable for emergency luminaires with changeable lens system	NLLSYSB4